

PREMIUM HOSES, TOOLS & EQUIPMENT



If it's not ZillaGreen[™], *it's not Flexzilla*®



Giving you the edge you deserve.

You work hard to get where you are in life. When it's time to choose the tools that help get you there, you deserve something that's above the ordinary. Tools that give you the edge you need to complete your projects faster, easier and with more satisfaction at the end of the day. You deserve Flexzilla hoses, tools and equipment.

It's the difference between ordinary tools and the innovative thinking designed into every Flexzilla product.

We take conventional tool ideas and rethink the work experience. The result is premium air, water and power tools that pull their weight and always put you a step ahead.

Experience it for yourself.

See how the innovative details we put into our tools make all the difference. Whether you're a professional or do-ityourselfer, working with Flexzilla tools doesn't feel like work.



CONTENTS



7	Air Compressors	
	Stationary Air Compressors	Air Compressor Accessories
12	Air Hoses	
	Air Hose Assemblies13Air Hose Kits14-15Whip Hose Assemblies15Polyurethane Recoil Hose16Hose Crimper16Pro Custom Air Hose17	Pro Custom Hose Centers18-19Pro Reusable Fittings and Splicers20Bulk Air and Water Hose20Pro Air Hose Assemblies21Pro Air Hose Kits22Pro Custom Length Whip Hose with High Flow Ball Swivel22
23	Air Hose Reels	
	Retractable Air Hose Reels with Levelwind™ Technology 24 Mounting Brackets 24 Retractable Air Hose Reels 25 Retractable Air Hose Reels - Single Axle Arm Support 26 Retractable Air Hose Reels - Dual Axle Arm Support 27	Retractable Air Hose Reels - Single Arm, Open Face28Manual Air Hose Reels29Manual Air Hose Reels - Fixed, Heavy-Duty30Manual Air Hose Reels - Portable31Lead-In Hoses32
33	Air Line Accessories	
	Pro High Flow Couplers and Plugs	Pro Heavy Duty Safety Couplers and Plugs
39	Blow Guns	
	Modular Blow Guns	Modular Blow Guns Accessories System
42	Air Tools	
	Pro Mini Impact Wrench	Reactionless Mini Air Ratchet Kit
45	Tire Maintenance	
	Tire Inflators	Truck Tire Inflator Kit



Plan-O-Grams & Part Number In	dex	89
Protective Eyewear89		
Protective Eyewear		88
Work Gloves	Work Glove Merchandising Options	
Work Gloves		68
WORKWEAR		
Lever Action Grease Gun	Grease Hoses	
Greasing Equipment 20V Cordless Grease Gun Kit	Quick-Release Grease Coupler	64
		CA
ar -		
Pro Extension Cords. 61 Retractable Extension Cord Reels. 62	Pro Retractable Extension Cord Reel 63	
Extension Cords		60
POWER		
SwivelGrip™ Garden and Lead-in Hose Assemblies	Pro Custom Water Hose55Pro Custom Water Hose Centers56-57Pro Water Hose Assemblies57Pro Water Hose Nozzles57Retractable Water Hose Reel with Levelwind Technology58Mounting Brackets58Pressure Washer Hose Assemblies59	
Water Hoses		47
WATER —		

ICONS THROUGHOUT THE CATALOG IDENTIFY FLEXZILLA® FEATURES AND BENEFITS



Flexzilla® Air Hose

FEATURES:

- · Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- Won't kink under pressure
- · Lightweight and easy to handle
- Lays flat no memory
- · Durable and abrasion-resistant outer cover
- Anodized aircraft aluminum ends
- Max. working pressure at 70°F: 300 psi
 Includes bend restrictors to reduce wear and tear, prolonging the life of the hose



Flexzilla® Water Hose

FEATURES:

- Extreme all-weather flexibility
- Won't kink under pressure
- · Lightweight, coils easily
- · Lays flat no memory
- · Durable outer cover resists abrasion, UV and mold
- · Reinforced mid-layering provides extra strength
- Anodized aircraft aluminum ends
- · Leak free connections A durable O-ring provides long lasting leak free connections



ColorConnex® Couplers & Plugs

ColorConnex is a patented system that allows color-to-color matching of couplers and plugs among the standard pneumatic interchanges.

- Industrial (Type D): Red Automotive (Type C): Blue ARO (Type B): Green

By using ColorConnex to dedicate line use. you can ensure you never use a lubricated line for a dry line application, preventing cross contamination.

- Match coupler and plug types
- Dedicate hose applications



Flexzilla® Pro Air Hose

FEATURES:

- Field Repairable Reusable anodized aircraft aluminum fittings
- Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- · Won't kink under pressure
- · Lightweight and easy to handle
- Lays flat no memory
- · Durable and abrasion-resistant outer cover
- Max. working pressure at 70°F: 300 psi
 Flexzilla Pro Reusable Fittings include bend reinforcement to reduce wear and tear, prolonging the life of the hose



Flexzilla® Pro Water Hose

FEATURES:

- Field Repairable Reusable anodized aircraft aluminum fittings
- Extreme all-weather flexibility
- Lightweight, coils easily
- Won't kink under pressure
- Lays flat no memory
- Durable outer cover resists abrasion, UV and mold
- · Reinforced mid-layering provides extra strength
- Leak free connections A durable O-ring provides long lasting leak free connections
- Max. working pressure at 70°F: 150 psi
 Flexzilla Pro Reusable Fittings include bend reinforcement for increased flexibility. Reduces wear and tear, prolonging the life of the hose.



Flexzilla® Pro High Flow **Couplers and Plugs**

Flexzilla Pro High Flow couplers and plugs allow Twice The Flow to your air tools compared to standard interchanges. Connect Flexzilla High Flow fittings from your tool all the way to the compressor. Don't Starve Your Air Tool!

- Push-To-Connect
- Increased efficiency
- Maximum Torque
- Maximum RPM
- Best Performance
- · Ideal for spray guns and impact tools

Flexzilla® Pro

Flexzilla Pro Products are designed with the professional in mind



Drinking Water Safe

The Flexible Hybrid Polymer inner tube material makes many of our hoses drinking water safe







QUIET TECHNOLOGY™

Quiet Technology™, which uses large, low-RPM pumps and motors to reduce high frequency noise levels while increasing CFM output.

SILENCER™ NOISE SUPPRESSION

A patented noise suppression system that uses baffles to reduce low frequency noise.

FLEXZILL

QUIET TECHNOLOGY



Stationary Air Compressors

Let's face it, standard air compressors are LOUD. All this NOISE interferes with workplace communication, lowers productivity on the job, and increases risk of hearing loss. Fortunately, Flexzilla® brings quiet back to the workplace.

I QUIET TECHNOLOGY™

- Flexzilla air compressors are the quietest on the market, emitting operating noise no louder than a normal conversation.
- Flexzilla air compressors feature low RPM pumps and motors that reduce high frequency noise levels while increasing CFM output.

SILENCER

Flexzilla stationary air compressors include the Silencer,™
a patented noise suppression system that reduces low
frequency noise levels.

INDUSTRY EXCLUSIVE!

10 HP RECIPROCATING UNIT / 1-PHASE


- High CFM performance without the cost of installing 3-Phase.
- Output of more expensive screw units without the added cost.















Stationary Air Compressors





FLEXZILLA® (5 HP) INCLUDES:

- Manual water drain
- Motor open drip proof (ODP)
 4 Year Warranty
 1 Year Parts and Labor Warranty

- Additional 3 Year Extended Parts Warranty





FLEXZILLA® PRO (7.5 / 10 HP) INCLUDE: • Cool Flow Technology™

- Timed water drain
- Belt tensioner
- Continuous run (Dual control)Totally enclosed fan cooled motor

- Magnetic starter prewired
 Ball valve crank case oil drain
 6 Year Warranty
 1 Year Parts and Labor Warranty
 Additional 5 Year Extended Parts Warranty

Part No.	HP Spec	Tank Size (Gal.)	CFM @ 90 PSI	Max. PSI	Pump	Connection	Pump Pressure Lubed	Automatic Tank Drain	Belt Tensioner	Continuous Run	Cool Flow Technology™	Length (in.)	Width (in.)	Height (in.)	Assembled in USA	Tank Made in USA
Flexzilla® Stationary	Flexzilla® Stationary Air Compressors, 5 HP															
FS05V080I1	5	80	19	175	2-Cyl	1-Phase	•					42	33	75	•	•
Flexzilla® Pro Statio	nary A	ir Comp	ressor	s, 7.5 l	HP											
FXS07V080V1	7.5	80	33	175	4-Cyl	1-Phase	•	•	•	•	•	38	42	72.5	•	•
FXS07V080V3-208	7.5	80	33	175	4-Cyl	3-Phase	•	•	•	•	•	38	42	72.5	•	•
FXS07V080V3-230	7.5	80	33	175	4-Cyl	3-Phase	•	•	•	•	•	38	42	72.5	•	•
Flexzilla® Pro Statio	nary A	ir Comp	ressor	s, 10 H	P											
FXS10V080V1	10	80	39	175	4-Cyl	1-Phase	•	•	•	•	•	38	42	72.5	•	•
FXS10V080V3-208	10	80	39	175	4-Cyl	3-Phase	•	•	•	•	•	38	42	72.5		•
FXS10V080V3-230	10	80	39	175	4-Cyl	3-Phase	•	•	•	•	•	38	42	72.5	•	•
FXS10V120V1	10	120	39	175	4-Cyl	1-Phase	•	•	•	•	•	41	43	78	•	•
FXS10V120V3-208	10	120	39	175	4-Cyl	3-Phase	•	•	•	•	•	41	43	78	•	•
FXS10V120V3-230	10	120	39	175	4-Cyl	3-Phase	•	•	•	•	•	41	43	78	•	•



Refrigerated Air Dryers

PRO

Flexzilla[™] Pro Refrigerated Air Dryers continuously chill the compressed air from your compressors to condense and remove moisture, leaving only powerful, compressed air your pneumatic tools require for best performance.

FEATURES:

- Premium Industrial Refrigerated Air Dryer
- Chills the air to condense and remove moisture; runs on 115 Volt, single phase
- 230 PSI max.; Max. inlet temp: 140°F; 37°F 50°F dew point
- Maximum ambient temperature: 122°F; for use with compressors that do not have aftercoolers
- 5 Micron Pre-Filter Removes larger dust and dirt particles from the air supply so the dryer can work more efficiently
- 1 Micron Active Coalescing Filter Removes oil and water Particles from the air; cleaner, drier air improves tool life & project results
- Refrigerated Air Inlet Inner Cooler Trouble-free high temperature cooling for consistent dry air
- Automatic Drain System Eliminates the need for daily maintenance
- · Outlet Air Baffle Heater Prevents condensation on outlet air piping
- · Side Mounted Condenser and Fan Motor
 - Easy to reach and service through the cabinet doors- no screws to slow you down
 - Uses environmentally friendly 134A refrigerant
- Heavy Duty Steel Cabinet and Safety Shut-Off Valve Meets the demands of industrial use; valve shuts the compressor down if it gets above or below a safe temperature



Part No.	Volt	CFM	HP Spec	Max. PSI	Inlet Fittings	Outlet Fittings
FDRCF1150030	115V	30	5 HP-7.5 HP	230 PSI	1/2 in. NPT	1/2 in. NPT
FDRCF1150058	115V	58	10 HP	230 PSI	1/2 in. NPT	1/2 in. NPT

Air Compressor Accessories

Part No.	Description	Retail Packaging	Assembled in USA
DRAIN013	Flexzilla™ Pro Air Compressor Timed Water Drain		
FILTER057	Flexzilla™ Air Compressors Air Filter for 5-10 HP		•
FILTER107KIT	Flexzilla™ Air Compressor Silencer™ Filter Replacements, Qty. 8		
FILTERKIT011	Flexzilla™ Air Dryer Filter Maintenance Kit, for 30 CFM	-	-
FILTERKIT012	Flexzilla™ Air Dryer Filter Maintenance Kit, for 58 CFM	-	-
FKIT026A	Smart Oil™ and Filter Maintenance Kit, 24-Piece, for 5-10 HP Air Compressors	-	-
ISOLATORS001	Flexzilla™ Air Compressors Isolator Pads, Qty. 4	-	-
MAINKIT008A	Flexzilla™ Air Compressors Oil and Filter Maintenance Kit, for 5-10 HP	-	•
OILFZ004	Flexzilla™ Air Compressor Oil, Synthetic, Piston-Type, 1 Qt.	•	•













NEW Portable Air Compressors



Flexzilla® Air Compressors are the quietest on the market, emitting operating noise no louder than a normal conversation.

Flexzilla Air Compressors feature low RPM twin cylinder pumps and motors that reduce high frequency noise levels.



FEATURES:

- Industrial Grade Pump
- Premium components and copper windings that outlast aluminum
- Direct Drive Pump
- Oil-Free Pump
- Reduces Maintenance
- Two Quick-Connect Universal Brass Couplers
- Pressure Regulator and Gauge
- Tank Pressure Gauge
- Manual Tank Drain
- Elastomeric Ergonomic Grip



CF10050F FEATURES:

• Convenient top mounted controls

CB20100F & CB20200F FEATURES:

- Front mounted controls
- 8 in. oversize wheels for ease of mobility



Part No.	HP Spec	Tank Size	CFM @ 90 PSI	Max. PSI	Pump RPM	Pump	Power Source	Current Draw / Max. Amps	Oil-Free Pump	Direct Drive Pump	Retail Packaging
Flexzilla® Port	able Air Co	mpressors,	1 HP								
CF10050F	1 HP	5 Gal.	2.5 CFM	125 PSI	1702 RPM	2-Cyl	ELECTRIC	7 AMPS @ 115V	•	•	•
Flexzilla® Port	able Air Co	mpressors,	2 HP								
CB20100F	2 HP	10 Gal.	5.8 CFM	125 PSI	1740 RPM	2-Cyl	ELECTRIC	14 AMPS @ 115V	•	•	•
CB20200F	2 HP	20 Gal.	5.8 CFM	125 PSI	1740 RPM	2-Cyl	ELECTRIC	14 AMPS @ 115V	•	•	•



FLEXIBLE HYBRID POLYMER

Flexzilla® hoses have a durable, abrasion-resistant outer cover.

WON'T KINK UNDER PRESSURE

Lightweight and easy to handle, Flexzilla hoses lay flat, have no memory and won't kink under pressure.

EXTREME ALL-WEATHER FLEXIBILITY

Flexzilla hoses offer extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F).



Air Hose Assemblies



Flexzilla® is a revolutionary hose featuring a Flexible Hybrid Polymer material that redefines flexibility. This engineered polymer-blend material permits use in environments where general purpose PVC and rubber hose may become too stiff. Flexzilla hose characteristics offer zero memory allowing it to lay flat. It won't work against you during operation and coils easily after use. Flexzilla offers extreme all-weather flexibility, even in subzero conditions, and is ideal in both hot and cold environments where tight radius bends are needed.



Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging	Made in USA
HFZ1425YW2	1/4 in.	25 ft.	1/4 in. MNPT	•	•
HFZ1450YW2	1/4 in.	50 ft.	1/4 in. MNPT	•	•
HFZ14100YW2	1/4 in.	100 ft.	1/4 in. MNPT	•	
HFZ14100YW2-3X	1/4 in.	100 ft.	1/4 in. MNPT	•	•
HFZ3825YW2	3/8 in.	25 ft.	1/4 in. MNPT	•	•
HFZ3825YW2-5X	3/8 in.	25 ft.	1/4 in. MNPT	•	•
HFZ3835YW2	3/8 in.	35 ft.	1/4 in. MNPT	•	
HFZ3850YW2	3/8 in.	50 ft.	1/4 in. MNPT	•	•
HFZ3850YW2-3X	3/8 in.	50 ft.	1/4 in. MNPT	•	
HFZ3850YW3	3/8 in.	50 ft.	3/8 in. MNPT	-	•
HFZ38100YW2	3/8 in.	100 ft.	1/4 in. MNPT	•	•
HFZ1225YW3	1/2 in.	25 ft.	3/8 in. MNPT	•	-
HFZ1250YW3	1/2 in.	50 ft.	3/8 in. MNPT	•	
HFZ1250YW4	1/2 in.	50 ft.	1/2 in. MNPT	-	-
HFZ12100YW3	1/2 in.	100 ft.	3/8 in. MNPT	•	-
HFZ12100YW4	1/2 in.	100 ft.	1/2 in. MNPT	-	-
Part nos with a -3	X or -5X suffix	include 3 or 5 hos	e assemblies respe	ctively in a retail mercl	nandiser display

FEATURES:

- Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- Won't kink under pressure
- · Lightweight and easy to handle
- · Lays flat no memory
- Durable and abrasion-resistant outer cover
- · Anodized aircraft aluminum ends
- Max. working pressure at 70°F: 300 psi
- Includes bend restrictors to reduce wear and tear, prolonging the life of the hose









Air Hose Kits - Include Hose, Coupler, and Plug





This convenient hose kit features the revolutionary Flexzilla® air hose paired with a Red Industrial (Type D) 1/4 in. body ColorConnex® coupler and plug set (one each). Combining Flexzilla's revolutionary design and the convenient color coding of ColorConnex, you get two great products in one. Plus, since thread sealer is already installed on the coupler and plug, you're ready to go as soon as you reach the jobsite.



KIT INCLUDES:

- Flexzilla Air Hose
- ColorConnex Red Industrial (Type D) Coupler and Plug
- Pre-Sealed Threads





FEATURING:	Use color to:	
GolorGonnex [®] Typed/Idustrial	Match coupler & plug typesDedicate hose applications	

Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging	Assembled in USA
HFZ1425YW2-D	1/4 in.	25 ft.	1/4 in. MNPT	•	•
HFZ1450YW2-D	1/4 in.	50 ft.	1/4 in. MNPT	•	•
HFZ14100YW2-D	1/4 in.	100 ft.	1/4 in. MNPT	•	
HFZ3825YW2-D	3/8 in.	25 ft.	1/4 in. MNPT	•	•
HFZ3835YW2-D	3/8 in.	35 ft.	1/4 in. MNPT	•	
HFZ3850YW2-D	3/8 in.	50 ft.	1/4 in. MNPT	•	•
HFZ38100YW2-D	3/8 in.	100 ft.	1/4 in. MNPT	•	•



Air Hose Kit – Includes Hose, Blow Gun and Accessories





11-Piece Air Compressor Kit

KIT INCLUDES:

- (1) Flexzilla Air Hose, 50 ft. x 3/8 in.
- (1) Blow Gun with safety tip
- (1) Ball Foot Chuck
- (1) Pencil Tire Pressure Gauge (10 to 100 psi)
 (1) Coupler, 1/4 in. FNPT
- (1) Coupler, 1/4 in. MNPT
- (2) Plugs, 1/4 in. FNPT
- (3) Plugs, 1/4 in. MNPT







Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging	Assembled in USA
HFZCLB11D	3/8 in.	50 ft.	1/4 in. NPT	•	•
HFZCLB11D-3X	3/8 in.	50 ft.	1/4 in. NPT	•	•
Pa	rt no. with a -3X	suffix include 3 hos	se assemblies in a	ı retail merchandiser di	splay

Whip Hose Assemblies



WHY USE A WHIP HOSE?

- · Increased longevity of the main hose
- Reduces user fatigue by eliminating weight of coupler/plug
- Increases mobility in tight spaces
- Improves air tool ergonomics





Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging	Assembled in USA
HFZ1405YW2B	1/4 in.	5 ft.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	-	•
HFZ3802YW2B	3/8 in.	2 ft.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	•	•
HFZ3804YW2B	3/8 in.	4 ft.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	•	
HFZ3806YW2B	3/8 in.	6 ft.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	•	•
HFZ1202YW3S	1/2 in.	2 ft.	3/8 in. MNPT Swivel x 3/8 in. MNPT	-	-
HFZ1204YW3S	1/2 in.	4 ft.	3/8 in. MNPT Swivel x 3/8 in. MNPT	-	-
HFZ1206YW3S	1/2 in.	6 ft.	3/8 in. MNPT Swivel x 3/8 in. MNPT		
HFZ1208YW3S	1/2 in.	8 ft.	3/8 in. MNPT Swivel x 3/8 in. MNPT	-	_
HFZ1202YW4S	1/2 in.	2 ft.	1/2 in. MNPT Swivel x 1/2 in. MNPT	-	-
HFZ1204YW4S	1/2 in.	4 ft.	1/2 in. MNPT Swivel x 1/2 in. MNPT	-	-
HFZ1206YW4S	1/2 in.	6 ft.	1/2 in. MNPT Swivel x 1/2 in. MNPT		



Polyurethane Recoil Hose

The Flexzilla® revolution continues with the Flexzilla polyurethane recoil air hose. Flexzilla recoil air hose exhibits extreme, allweather flexibility and outperforms nylon hose. Plus, with the field repairable fittings, damaged hose can be repaired quickly, using tools commonly available on the jobsite.

FEATURES:


- Extreme all-weather flexibility (-40° to 165°F)
- Polyurethane outperforms nylon:
- More flexible
- Will not become brittle over time
- Better recoil memory
- Working pressure at 70°F: 120 psi
 1/4 in. MNPT reusable ends
- Safety factor: 3:1
- Tool end: 16 in. tail with swivel fitting
- Compressor end: 8 in. tail with rigid fitting
- Pre-applied thread sealer

Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
LP1410AFZ	1/4 in.	10 ft.	1/4 in. MNPT	•
LP1415AFZ	1/4 in.	15 ft.	1/4 in. MNPT	•
LP1420AFZ	1/4 in.	20 ft.	1/4 in. MNPT	•
LP1425AFZ	1/4 in.	25 ft.	1/4 in. MNPT	•



Hose Crimper

Hose Crimper					
Part No.	Die Bore Sizes	Retail Packaging			
A5	5/8 in. 37/64 in. (for 3/8 in. Flexzilla) 17/32 in. 7/16 in. (For 1/4 in. Flexzilla) 11/16 in. (For 1/2 in. Flexzilla)	-			

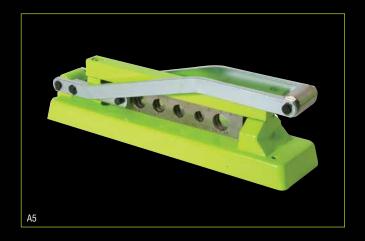



Flexzilla® Pro Air Hose



Flexzilla® Pro Air Hose is available in pre-assembled coils or in our Custom Hose Centers where the end user can fabricate a custom length hose for any application. The field repair and custom length hose process takes



CUSTOM LENGTHS



CUT – Measure and cut desired length of hose at 90° angle.



INSTALL – Slide spiral fitting and nut onto hose.
 Push hose onto fitting until hose reaches threads.



TIGHTEN – Tighten fitting nut until snug. Slide bend restrictor up and snap onto nut.

FIELD REPAIRABLE



CUT – Cut damaged portion of hose at 90° angle. Slide fitting nuts onto hose.



INSTALL – Slide hose onto fitting until hose reaches threads.



TIGHTEN – Tighten fitting nuts until snug.



Custom Hose Centers











The Flexzilla® Pro Custom Hose Centers allow you to provide your customers with custom length hose assemblies. Using Flexzilla Pro reusable ends, you can quickly and easily create custom length hose assemblies on site.

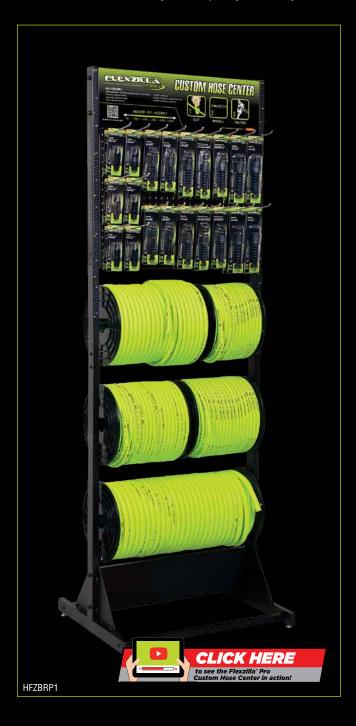

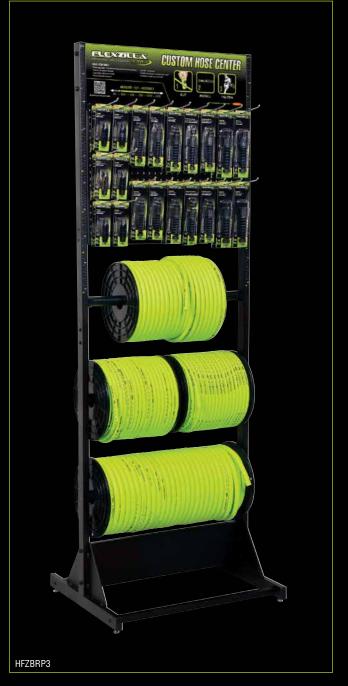



Custom Hose Centers (continued)










	HFZBRP1 - Flexzilla® Pro Custom Hose Center	
Part No.	Description	Rack Quantity
HFZ12250YW	Flexzilla® Pro Air Hose, 1/2 in. x 250 ft. Spool, ZillaGreen™	1 ea.
HFZ14250YW	Flexzilla® Pro Air Hose, 1/4 in. x 250 ft. Spool, ZillaGreen™	2 ea.
HFZ38250YW	Flexzilla® Pro Air Hose, 3/8 in. x 250 ft. Spool, ZillaGreen™	2 ea.
HFZW58250YW	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, ZillaGreen™	1 ea.
RP900250	Flexzilla® Pro Air Hose Reusable Fitting, 1/4 in.	10 ea.
RP900250BS	Flexzilla® Pro Air Hose Reusable Fitting with Ball Swivel, 1/4 in.	10 ea.
RP900375	Flexzilla® Pro Air Hose Reusable Fitting, 3/8 in.	10 ea.
RP900375BS	Flexzilla® Pro Air Hose Reusable Fitting with Ball Swivel, 3/8 in.	10 ea.
RP900500	Flexzilla® Pro Air Hose Reusable Fitting, 1/2 in.	10 ea.
RP900500S	Flexzilla® Pro Air Hose Reusable Fitting with Swivel, 1/2 in.	10 ea.
RP900625F	Flexzilla® Pro Water Hose Female Reusable Fitting, 5/8 in.	10 ea.
RP900625M	Flexzilla® Pro Water Hose Male Reusable Fitting, 5/8 in.	10 ea.
RP901250	Flexzilla® Pro Air Hose Reusable Splicer, 1/4 in.	10 ea.
RP901375	Flexzilla® Pro Air Hose Reusable Splicer, 3/8 in.	10 ea.
RP901500	Flexzilla® Pro Air Hose Reusable Splicer, 1/2 in.	10 ea.
HR-05	Custom Hose Center (Freestanding Rack)	1 ea.




HFZBRP3 - Flexzilla® Pro Custom Hose Center						
Part No.	Description	Rack Quantity				
HFZ12250YW	Flexzilla® Pro Air Hose, 1/2 in. x 250 ft. Spool, ZillaGreen™	1 ea.				
HFZ38250YW	Flexzilla® Pro Air Hose, 3/8 in. x 250 ft. Spool, ZillaGreen™	4 ea.				
HFZW58250YW	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, ZillaGreen™	2 ea.				
RP900375	Flexzilla® Pro Air Hose Reusable Fitting, 3/8 in.	20 ea.				
RP900375BS	Flexzilla® Pro Air Hose Reusable Fitting with Ball Swivel, 3/8 in.	20 ea.				
RP900500	Flexzilla® Pro Air Hose Reusable Fitting, 1/2 in.	10 ea.				
RP900500S	Flexzilla® Pro Air Hose Reusable Fitting with Swivel, 1/2 in.	10 ea.				
RP900625F	Flexzilla® Pro Water Hose Female Reusable Fitting, 5/8 in.	10 ea.				
RP900625M	Flexzilla® Pro Water Hose Male Reusable Fitting, 5/8 in.	10 ea.				
RP901375	Flexzilla® Pro Air Hose Reusable Splicer, 3/8 in.	20 ea.				
RP901500	Flexzilla® Pro Air Hose Reusable Splicer, 1/2 in.	10 ea.				
HR-05	Custom Hose Center (Freestanding Rack)	1 ea.				
	Parts also sold seperately in standard pack quantities					



HFZ38250YW















Reusable Fittings and Splicers – Air and Water Hose 🔼 🜠 🙉 🗪









Flexzilla® Pro Reusable Fittings and Splicers allow you to quickly repair Flexzilla hose on the jobsite, or create a custom length hose in just three easy steps.

Splicers Include:

• Reusable MNPT anodized aircraft aluminum fitting for Flexzilla and Flexzilla Pro Air Hose



Part No.	Description	Application	Fitting	Barb Size	Retail Packaging
RP900250	Reusable Fitting	Air	1/4 in. MNPT	1/4 in.	•
RP900250BS	Reusable Ball Swivel Fitting	Air	1/4 in. MNPT	1/4 in.	•
RP900250S	Reusable Swivel Fitting	Air	1/4 in. MNPT	1/4 in.	•
RP900375	Reusable Fitting	Air	1/4 in. MNPT	3/8 in.	•
RP900375BS	Reusable Ball Swivel Fitting	Air	1/4 in. MNPT	3/8 in.	•
RP900375S	Reusable Swivel Fitting	Air	1/4 in. MNPT	3/8 in.	•
RP900500	Reusable Fitting	Air	3/8 in. MNPT	1/2 in.	•
RP900500S	Reusable Ball Swivel Fitting	Air	3/8 in. MNPT	1/2 in.	•
RP901250	Hose Splicer	Air	-	1/4 in.	•
RP901375	Hose Splicer	Air		3/8 in.	•
RP901500	Hose Splicer	Air	-	1/2 in.	•
RP900625F	Reusable Fitting	Water	3/4 in. Female GHT	5/8 in.	•
RP900625M	Reusable Fitting	Water	3/4 in. Male GHT	5/8 in.	•

Bulk Air and Water Hose









Flexzilla® Pro bulk hose spools allow you to create custom length hose.







Part No.	Application	Hose I.D.	Spool Length	Hose Fittings	Max. Working Pressure	Retail Packaging
HFZ14250YW	Air	1/4 in.	250 ft.	Sold separately	300 psi	
HFZ38250YW	Air	3/8 in.	250 ft.	Sold separately	300 psi	
HFZ12250YW	Air	1/2 in.	250 ft.	Sold separately	300 psi	
HFZW58250YW	Water	5/8 in.	250 ft.	Sold separately	150 psi	-



Air Hose Assemblies





Flexzilla® Pro Field Repairable Air Hose features extreme all-weather flexibility, rugged durability and won't kink under pressure. Its unique Flexible Hybrid Polymer material redefines flexibility. With reusable anodized aircraft aluminum fittings, the Flexzilla Pro Air Hose can be repaired on the jobsite in a few simple steps.



Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZP1425YW2	1/4 in.	25 ft.	1/4 in. MNPT	•
HFZP1450YW2	1/4 in.	50 ft.	1/4 in. MNPT	•
HFZP14100YW2	1/4 in.	100 ft.	1/4 in. MNPT	•
HFZP3825YW2	3/8 in.	25 ft.	1/4 in. MNPT	•
HFZP3835YW2	3/8 in.	35 ft.	1/4 in. MNPT	•
HFZP3850YW2	3/8 in.	50 ft.	1/4 in. MNPT	•
HFZP38100YW2	3/8 in.	100 ft.	1/4 in. MNPT	•

FEATURES:

- Field Repairable Reusable anodized aircraft aluminum fittings
- Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- Won't kink under pressure
- Lightweight and easy to handle
- Lays flat no memory
- Durable and abrasion-resistant outer cover
- Max. working pressure at 70°F: 300 psi
- Flexzilla Pro Reusable Fittings include bend reinforcement to reduce wear and tear, prolonging the life of the hose





Air Hose Kits - Include Hose, Coupler and Plug







This convenient hose kit features the revolutionary Flexzilla® Pro Flexible Hybrid Polymer air hose paired with a Red Industrial (Type D) ColorConnex® Coupler and Plug Set (one each). Combining Flexzilla's revolutionary design and the convenient color coding of ColorConnex, you get two great products in one. Plus, since the thread sealer is already installed on the coupler and plug, you're ready to go as soon as you reach the jobsite.

KIT INCLUDES:

- Flexzilla Pro Air Hose
- ColorConnex Red Industrial (Type D) Coupler and Plug
- · Pre-sealed Threads

Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZP1425YW2-D	1/4 in.	25 ft.	1/4 in. MNPT	•
HFZP1450YW2-D	1/4 in.	50 ft.	1/4 in. MNPT	•
HFZP14100YW2-D	1/4 in.	100 ft.	1/4 in. MNPT	•
HFZP3825YW2-D	3/8 in.	25 ft.	1/4 in. MNPT	•
HFZP3850YW2-D	3/8 in.	50 ft.	1/4 in. MNPT	•
HFZP38100YW2-D	3/8 in.	100 ft.	1/4 in. MNPT	•



Custom Length Whip Hose with High Flow Ball Swivel







WHY USE A WHIP HOSE?

- Increased longevity of the main hose
- Reduces user fatigue by eliminating weight of coupler/plug
- · Increases mobility in tight spaces
- · Improves air tool ergonomics





Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZP3806YW2B	3/8 in.	6 ft.	1/4 in. MNPT High Flow Ball Swivel and Reusable Fitting (RP900375)	•



LEVELWIND™ TECHNOLOGY

Automatically layers the hose back and forth across the reel.

LATCHING MODE SWITCH

Latch hose every three feet for extended use or switch to free run for immediate, automatic rewinding.



Retractable Air Hose Reels with Levelwind™ Technology



PRO

Featuring Levelwind™ – Flexzilla's unique winding system that automatically layers hose back and forth across the reel ensuring that the hose is coiled smoothly, easily...every time – and includes Flexzilla® air hose and lead-in hose.





FEATURES:

- Latching Mode Switch Choose from latching hose every 3 ft. for extended use or switch to free run for immediate automatic rewinding
- Seven Position Locking Bracket These reels can swivel freely on a mounting bracket up to 135° or can be locked into place using the locking brace.
 Up to seven different locking angles can be utilized (L8300-W)
- Adjustable Hose Stopper Increase or decrease the length of the hose that remains when hose is fully retracted
- Extra Large Swivel A 3/4 in. swivel reduces flow restrictions and allows for maximum flow
- Freestanding Base Portable Use freestanding or mounted on wall or ceiling. Flat base allows reel to rest on the ground
- Built-In Handle For carrying ease
- Durable Construction Made from durable UV stabilized polypropylene
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



Retractable Air Hose Reels with Levelwind™ Technology

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8305FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	3/4 in. Female GHT x 1/4 in. MNPT	3/4 in. – 11½ Male GHT	1/4 in. MNPT	25 lbs.	•	•
L8306FZ	3/8 in.	75 ft.	300 psi	-40° to 140°	3/4 in. Female GHT x 1/4 in. MNPT	3/4 in. – 11½ Male GHT	1/4 in. MNPT	30 lbs.	•	•
L8335FZ	1/2 in.	50 ft.	300 psi	-40° to 140°	3/4 in. Female GHT x 3/8 in. MNPT	3/4 in. – 11½ Male GHT	3/8 in. MNPT	29 lbs.	•	•

Mounting Brackets

L8300-B FEATURES:

- · Includes a seven position locking bracket
- Reel can swivel freely on mounting bracket up to 360° or can be locked into place using the locking brace
- · Mounting options: high wall or bench

L8300-W FEATURES:

- Includes a seven position locking bracket
- Reel can swivel freely on mounting bracket up to 135° or can be locked into place using the locking brace
- · Mounting options: wall or overhead ceiling





NEW Retractable Air Hose Reels



These economical, retractable air hose reels are ideal for the home shop.



HOSE I.D.	WORKING PRESSURE
3/8 IN.	150 PSI



HOSE I.D.	WORKING PRESSURE
3/8 IN.	150 PSI

L8232FZ FEATURES:

- Automatic Leveling System Layers the hose evenly when rewinding
- Multipoint Latch Mechanism Reel will automatically lock hose in place at any length wherever you stop
- Impact Resistant Housing
- Speed Control Device Provides consistent and safe speed when retracting the hose
- Adjustable Hose Stopper Increase or decrease the length of the hose that remains when hose is fully retracted
- Swivel Mounting Bracket Pivots in the direction of your work, reel can be mounted to wall or ceiling
- Lead-in Hose Included 3 ft. x 1/4 in. MNPT

L8250FZ FEATURES:

- Multi-Position Release Ratchet Allows appropriate amount of hose to be extended for each jobsite
- Auto Retract/Latch Hose Mechanism Simplifies every job by keeping excess hose out of the work space
- Positive Latching Mechanism Locks hose automatically in 18 in. intervals
- Durable Construction Made from durable UV stabilized polypropylene
- Adjustable Hose Stopper Increase or decrease the length of the hose that remains when hose is fully retracted
- Swivel Mounting Bracket Pivots in the direction of your work, reel can be mounted to wall or ceiling
- Lead-in Hose Included 3 ft. x 1/4 in. MNPT

Retractable Air Hose Reels

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Hose Outlet	Weight	Retail Packaging
L8232FZ	3/8 in.	30 ft.	150 psi	-40° to 140°	1/4 in. MNPT	1/4 in. MNPT	13 lbs.	•
L8250FZ	3/8 in.	50 ft.	150 psi	-40° to 140°	1/4 in. MNPT	1/4 in. MNPT	17 lbs.	•



Retractable Air Hose Reels – Single Axle Arm Support



These retractable, open face hose reels are ideal for indoor shop, mobile and industrial applications.



FEATURES:

- Multi-Position Guide Arm Allows mounting on wall, tank or overhead
- Durable Heavy-Duty Steel Construction -Provides strength and stability to the reel and bracket
- Corrosion-Resistant Powder Coating -Provides extra measure of protection against the elements
- Four-Way Direction Rollers Allow the hose to be easily pulled from the reel
- **Self-Locking Fasteners** Stay tight even in mobile installations
- Narrow Size Ideal for easy placement and storage
- Multi-Position Release Ratchet Allows appropriate amount of hose to be extended for each jobsite
- Metal Latching Pawl Makes an audible clicking sound allowing the latching zone to be locked quickly and easily
- Fully-Enclosed Spring Motor Packed with grease for extended life
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



Retractable Air Hose Reels - Single Axle Arm Support

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8603FZ	3/8 in.	25 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. FNPT	1/4 in. MNPT	25 lbs.	-	•
L8611FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	3/8 in. MNPT Swivel x 1/4 in. MNPT	3/8 in. FNPT Swivel	1/4 in. MNPT*	40 lbs.	•	-
*1/4 in. MNPT x 3/8 in. bushing included										



Retractable Air Hose Reels - Dual Axle Arm Support





Featuring dual axle arm support, these retractable open face hose reels can withstand constant vibration making them ideal for mobile installations.



HOSE I.D.	WORKING PRESSURE
3/8 IN.	300 PSI



HOSE I.D.	WORKING PRESSURE
1/2 IN.	300 PSI

FEATURES:

- Multi-Position Release Ratchet Allows appropriate amount of hose to be extended for each jobsite
- Durable Heavy-Duty Steel Construction Provides strength and stability to the reel
- Corrosion-Resistant Powder Coating Provides extra measure of protection against the elements
- Four-Way Direction Rollers Allow the hose to be easily pulled from the reel
- Self-Locking Fasteners Stay tight even in mobile installations
- Narrow Size Ideal for easy placement and storage

- Multi-Position Guide Arm Allows mounting on wall, truck, tank or overhead
- Galvanized Dual Support Arms and Bases Resist rust and correcion
- Dual Axle Arm Support Can withstand the constant vibration of mobile installations
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



Retractable Air Hose Reels – Dual Axle Arm Support

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8711FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	3/8 in. MNPT Swivel x 1/4 in. MNPT	3/8 in. MNPT Swivel	3/8 in. MNPT	39 lbs.		-
L8741FZ	1/2 in.	50 ft.	300 psi	-40° to 140°	3/8 in. MNPT x 3/8 in. MNPT Swivel	3/8 in. MNPT	3/8 in. MNPT	44 lbs.	-	•



Retractable Air Hose Reels - Single Arm, Open Face



PRO

Built with quality and durability in mind, these reels incorporate heavy gauge steel and corrosion-resistant components to withstand the harsh conditions in the workplace.





HOSE I.D.	WORKING PRESSURE
1/2 IN.	300 PSI

FEATURES:

- Multi-Position Release Ratchet Allows appropriate amount of hose to be extended for each jobsite
- Durable Heavy-Duty Steel Construction Provides strength and stability to the reel
- Corrosion-Resistant Powder Coating Provides extra measure of protection against the elements
- Self-Locking Fasteners Stay tight even in mobile installations
- Narrow Size Ideal for easy placement and storage
- Multi-Position Guide Arm Allows mounting on wall, tank, overhead, bench, or vehicle
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.

ASSEMBLED IN USA of US and global components

Retractable Air Hose Reels - Single Arm, Open Face


Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8011FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	3/8 in. MNPT Swivel x 3/8 in. MNPT	3/8 in. MNPT Swivel	3/8 in. MNPT	32 lbs.		
L8041FZ	1/2 in.	50 ft.	300 psi	-40° to 140°	1/2 in. MNPT Swivel x 1/2 in. MNPT	1/2 in. MNPT Swivel	1/2 in. MNPT	33 lbs.		•



Manual Air Hose Reels



These manual open face hose reels are ideal for indoor shop, mobile and industrial applications.

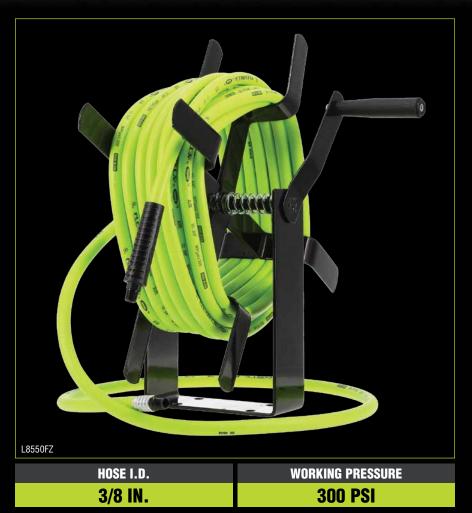

FEATURES:

- Swivel Handle Pivots in hand for winding ease
- Mounting Bracket Mount reel to wall, workbench or vehicle
- Swivel Heavy-duty 1/4 in. brass Baked Enamel Finish Provides a smooth and durable finish
- Bend Restrictor Prolongs the life of the
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



Manual Air Hose Reels

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8550FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	15 lbs.	-	•
L8560FZ	3/8 in.	100 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	22 lbs.	-	•



Manual Air Hose Reels - Fixed, Heavy Duty



These manual heavy-duty drum reels are compact and ideal for indoor shop and industrial applications.





HOSE I.D.	WORKING PRESSURE	SUPPORT
3/8 IN.	300 PSI	DUAL

FEATURES:

- Heavy-Duty Drum Heavy-duty steel reinforced drum.
- Powder Coat Finish Provides a smooth and durable finish
- Brake Keeps hose from unwinding unintentionally (L8650FZ only)
- Inlet Swivel Heavy-duty 1/4 in. brass
 Tapered Side Walls Store more hose in less space
- Swivel Handle Pivots in hand for winding ease
- Mounting Bracket Mount reel to wall, workbench, or vehicle
- Dual Support Provides extra stability for the big jobs (L8652FZ only)

 • Bend Restrictor - Prolongs the life of the air hose
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.

SSEMBLED IN USA of US and global components

Manual Air Hose Reels - Fixed, Heavy Duty

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8650FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	16 lbs.		
L8652FZ	3/8 in.	100 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	30 lbs.		•



Manual Air Hose Reels - Portable



Designed for portability, these reels are useful just about anywhere on the jobsite. Use an air manifold with the supply hose to service multiple air tools (air manifold is sold separately). The hose layering guide spools hose back onto the reel eliminating tangles; cleanup is faster and easier.



HOSE I.D.	WORKING PRESSURE
3/8 IN.	300 PSI



1/4 IN.	300 PSI
HOSE I.D.	WORKING PRESSURE

FEATURES:

- Hose Layering Guide Manually operated guide smoothly winds hose without tangles
- **Drum Lock** Ideal for mobile installations. Prevents air hose from unwinding accidentally
- Carrying Handle For complete portability
- **Support Legs** Attach support legs for placing reel on ground. Predrilled holes can be used for staking reel to the ground
- Mounting Bracket Reel can be mounted on truck, wall or bench
- Swivel Handle Swivels in hand for winding ease. Folds in for transporting
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



Manual Air Hose Reels – Portable

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8651FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	21 lbs.	•	•
L8654FZ	1/4 in.	100 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	21 lbs.	-	•



Lead-In Hoses



Flexzilla hose reels come equipped with a lead-in hose as standard equipment. Details regarding the lead-in hose that comes with each reel model are listed below. If for some reason you need to replace your lead-in hose, please refer to the part number that corresponds to your model of reel.





Part No.	Lead-in Hose For Part Nos.	Hose I.D.	Hose Length	Fittings	Hose Material	Working Pressure @ 70°F	Temperature Range (F°)	Retail Packaging	Made in USA	Assembled in USA
L8011FZLI	L8011FZ	3/8 in.	5 ft.	3/8 in. MNPT Swivel x 3/8 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	-	•	-
L8041FZLI	L8041FZ	1/2 in.	5 ft.	1/2 in. MNPT Swivel x 1/2 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°			
L8250FZLI	L8230FZ L8250FZ	3/8 in.	3 ft.	1/4 in. MNPT	Flexible Hybrid Polymer	150 psi	-40° to 140°	-	-	•
L8305FZLI	L8305FZ L8306FZ	3/8 in.	5 ft.	3/4 in. Female GHT x 1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	-	-	-
L8335FZLI	L8335FZ	1/2 in.	5 ft.	3/4 in. Female GHT x 3/8 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	-	-	-
L8611FZLI	L8611FZ L8711FZ	3/8 in.	5 ft.	3/8 in. MNPT Swivel x 1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	-	•	-
L8651FZLI	L8550FZ L8560FZ L8603FZ L8650FZ L8651FZ L8652FZ	3/8 in.	5 ft.	1/4 in. MNPT x 1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	-	•	-
L8654FZLI	L8654FZ	1/4 in.	5 ft.	1/4 in. MNPT x 1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	-	_	•



360° ROTATION

Ball swivel rotates 360° at a 30° angle.

HIGH FLOW

High flow couplers and plugs allow twice the amount of airflow to your tool.



High Flow Couplers and Plugs






Flexzilla® Pro High Flow couplers and plugs allow Twice The Flow to your air tools compared to standard interchanges. Connect Flexzilla High Flow fittings from your tool all the way to the compressor. This ensures the best performance your air system can provide. For maximum efficiency, use Flexzilla Pro High Flow.



Don't Starve Your Air Tool!

- Push-To-Connect System
- Maximum Torque
- Maximum RPM
- Ideal for spray guns and impact tools or any high output tool

Flexzilla Pro High Flow Ball Swivel brings ergonomic ease to any tool attached to it. Save your wrist and improve your ability to get into hard-to-reach places.

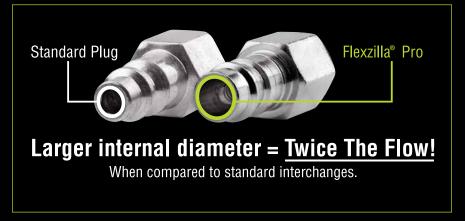

Ball swivel rotates 360° at a 30° angle.






High Flow Couplers and Plugs






Couplers







Part No.	Туре	Interchange	Connection Size	Body Size	Max. Pressure	Material	Retail Packaging
High Flow Co	uplers						
A53416FZ	Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	•
A53416FZ-X	Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	
A53426FZ	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	•
A53426FZ-X	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	
A53616FZ	Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	•
A53616FZ-X	Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	
A53626FZ	Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	•
A53626FZ-X	Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	-
		4811.1	Distant Ctant with				

-X = Product offered in bulk, individually bagged product

Plugs











Part No.	Туре	Interchange	Connection Size	Body Max. Size Pressure		Material	Retail Packaging	
High Flow Plugs								
A53430FZ-X	Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	_	
A53440FZ-X	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	-	
A53630FZ-X	Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	-	
A53640FZ-X	Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	-	
A53440FZBS	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	•	
A53440FZBS-X	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel		
High Flow Plugs – 2-Pc.								
A53430FZ-2PK	Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	•	
A53440FZ-2PK	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	•	
A53630FZ-2PK	Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	•	
A53640FZ-2PK	Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	•	
		-X - Produc	t offered in bulk	individual	ly hanged pro	nduct		



High Flow Coupler and Plug Kits

















Part No.	Туре	Interchange	Connection Size	Body Size	Max. Pressure	Material	Contents	Retail Packaging			
3-Pc. Coupler and Plug Kit											
A53452FZ	Z	High Flow	1/4 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) FNPT Coupler, (1) FNPT Plug and (1) MNPT Plug	•			
7-Pc. Coupler and Plug Kits											
A53457FZ	Z	High Flow	1/4 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) FNPT Coupler, (1) MNPT Coupler, (2) FNPT Plug and (3) MNPT Plug	•			
A53657FZ	Z	High Flow	3/8 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) FNPT Coupler, (1) MNPT Coupler, (2) FNPT Plug and (3) MNPT Plug	•			
14-Pc. Coupler and	14-Pc. Coupler and Plug Kit										
A53458FZ	Z	High Flow	1/4 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(2) FNPT Coupler, (2) MNPT Coupler, (4) FNPT Plug and (6) MNPT Plug	•			
3-Way Manifold											
A86666FZ	Z	High Flow	3/8 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) 3-Way Flat Hex Manifold, (3) A53626FZ and (1) A53640FZ	•			
	*Nickel Plated Steel with Anodized Aluminum Sleeve										




Heavy Duty Safety Couplers and Plugs



Flexzilla® Pro Heavy Duty Safety Couplers and Plugs feature ZVR™ Technology, Zero Valve Restriction provides maximum CFM possible. Paired with quick, safe and easy connections, Flexzilla Pro HD Couplers and Plugs are the best choice for maximum performance from your air tools.



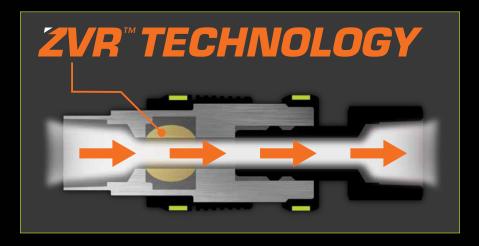

FEATURES:

- ZVR™ Technology Zero Valve Restriction provides absolute throughput and feeds your tool the maximum CFM possible
- Safety Coupler Connect and disconnect under zero pressure
- Non-marring

QUICK, SAFE & EASY CONNECTIONS

ENGAGE AT ZERO PRESSURE

DISENGAGE AT ZERO PRESSURE



Push-to-connect under zero pressure



Push sleeve up to open valve and engage air flow



Pull sleeve down to shut off air flow and pull top collar down to disengage plug under zero pressure



Heavy Duty Safety Couplers and Plugs

PRO

Couplers


Part No.	Туре	Interchange	Connection Size	Body Size	Max. Pressure	Material	Retail Packaging
Heavy Duty S	afety Cou	ıplers					
A55618FZ	Н	Industrial	3/8 in. FNPT	1/2 in.	175 psi	Multiple*	•
A55628FZ	Н	Industrial	3/8 in. MNPT	1/2 in.	175 psi	Multiple*	•
A55818FZ	Н	Industrial	1/2 in. FNPT	1/2 in.	175 psi	Multiple*	•
A55828FZ	Н	Industrial	1/2 in. MNPT	1/2 in.	175 psi	Multiple*	•
*Nickel Plated Steel and ABS							





Plugs

Part No.	Туре	Interchange	Connection Size	Body Size	Max. Pressure	Material	Retail Packaging
Heavy Duty Sa	afety Plu	gs					
A55630FZ	Н	Industrial	3/8 in. FNPT	1/2 in.	232 psi	Nickel Plated Steel	•
A55640FZ	Н	Industrial	3/8 in. MNPT	1/2 in.	232 psi	Nickel Plated Steel	•
A55830FZ	Н	Industrial	1/2 in. FNPT	1/2 in.	232 psi	Nickel Plated Steel	•
A55840FZ	Н	Industrial	1/2 in. MNPT	1/2 in.	232 psi	Nickel Plated Steel	•





Heavy Duty Safety Coupler and Plug Kits



Part No.	Туре	Interchange	Connection Size	Body Size	Max. Pressure	Material	Contents	Retail Packaging
5-Pc. Coupler	and Plug	Kits						
A55656FZ	Н	Industrial	3/8 in. NPT	1/2 in.	175 psi	Multiple*	(1) FNPT Coupler, (1) MNPT Coupler, (1) FNPT Plug, and (2) MNPT Plugs	•
A55856FZ	Н	Industrial	1/2 in. NPT	1/2 in.	175 psi	Multiple*	(1) FNPT Coupler, (1) MNPT Coupler, (1) FNPT Plug, and (2) MNPT Plugs	•

*Nickel Plated Steel and ABS







MODULAR ACCESSORIES SYSTEM

Includes needle tips, chip guards, extensions and OSHA-compliant safety nozzles.

INCREASED AIR FLOW

Variable flow trigger that can be tailored to a high power job or delicate precision work.

THOUGHTFULLY DESIGNED

Ergonomic handle and rubberized grip.



Modular Blow Guns



Introducing Flexzilla™ Blow Guns and accessories. Flexzilla features an ergonomically superior gun body for maximum comfort and control which reduces operator fatigue. A variable flow trigger regulates air volume precisely with maximum flow, equal to or greater than the competition. The exclusive modular accessories system allows the Flexzilla blow guns to be customized for extension length and tips needed for any job. Flexzilla safety nozzles and bendable extension are labeled to meet or exceed OSHA standards.





Part No.	Description	CFM	dBA	Variable Flow Trigger	Meets OSHA Number	Line psi	Retail Packaging
AG1102FZ	Flexzilla™ X3™ Blow Gun with Quiet-Flo Safety Nozzle	36	87	•	1910.95 (a), 1910.242 (b)	100	•
AG1202FZ	Flexzilla™ X3™ Blow Gun with Xtreme-Flo Safety Nozzle	50	99	•	1910.242 (b)	100	•
AG1402FZ	Flexzilla™ X1™ Blow Gun with Quiet-Flo Safety Nozzle	36	87		1910.95 (a), 1910.242 (b)	100	•
AG1502FZ	Flexzilla™ X1™ Blow Gun with Xtreme-Flo Safety Nozzle	43	99	-	1910.242 (b)	100	•

Modular Blow Gun Kits

Flexzilla™ X3™ 6-Pc. Blow Gun Kit

AG1200FZKIT INCLUDES:

- a Flexzilla X3 Blow Gun with Variable Flow Trigger
- b − 6 in. Extension
- c Chip Guard
- d Tri-Thrust Safety Nozzle
- e Xtreme-Flo Safety Nozzle
- f Quiet-Flo Safety Nozzle

Flexzilla™ X1™ 10-Pc. Blow Gun Kit

AG1500FZKIT INCLUDES:

- a Flexzilla X1 Blow Gun
- b − 6 in. Extensions (x2)
- c Needle Tips (1 in., 2 in. & 3 in.)
- d Xtreme-Flo Safety Nozzle
- e Quiet-Flo Safety Nozzle
- f Rubber Tip
- g Tip Adapter

Part No.	Retail Packaging
AG1200FZKIT	•
AG1500FZKIT	•








Modular Blow Guns Accessories System

The exclusive modular accessories system (sold separately) allows the Flexzilla™ blow guns to be customized for extension length and tips needed for any job. Flexzilla safety nozzles and bendable extension are labeled to meet or exceed OSHA standards. Extensions can be combined up to 6 feet.



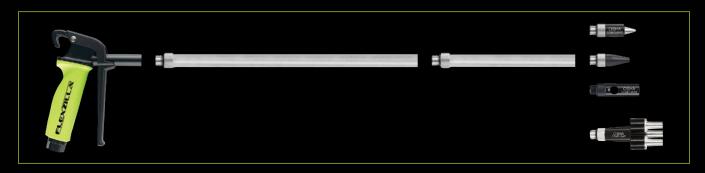


















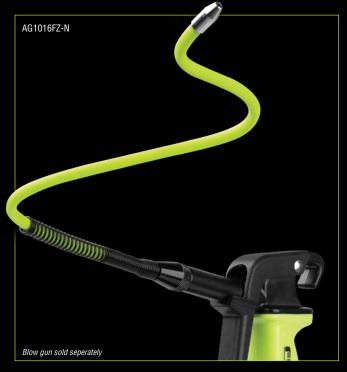

Part No.	Description	Retail Packaging
AG934FZ	Flexzilla™ Rubber Tip	•
AG1090FZ	Flexzilla™ Xtreme-Flo Safety Nozzle	•
AG1091FZ	Flexzilla™ Quiet-Flo Safety Nozzle	•
AG1093FZ	Flexzilla™ Tri-Thrust Safety Nozzle	•
AG1099FZ	Flexzilla™ 5-Pc. Tip Adapter Kit	•
AG1092FZ	Flexzilla™ Chip Guard	•
AG1006FZ	Flexzilla™ 6 in. Extension	•
AG1012FZ	Flexzilla™ 12 in. Extension	•
AG1016FZ-N	Flexzilla™ 16 in. Bendable Extension	•

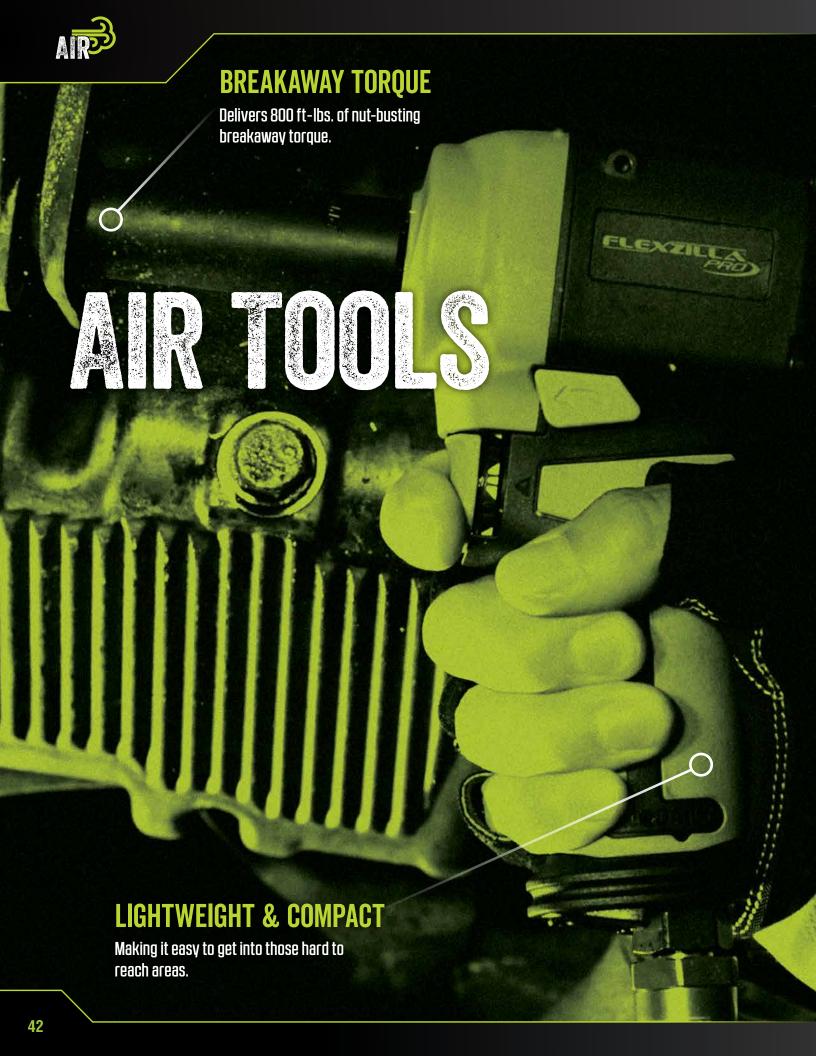



Mini Impact Wrench





TORQUE	DRIVE
800 FT-LBS.	1/2 IN.
HIGH SPEED	AIR CONSUMPTION
9500 RPM	4.8 CFM

Proving once again you don't have to be big to be powerful. Flexzilla® Pro Air Tools pack high RPM and maximum torque into the lightest, most compact air tools on the market. The mini impact wrench has 800 ft-lbs. of nut-busting breakaway torque and an extremely lightweight design.

Flexzilla Pro Mini Impact Wrench (AT1475FZ)


FEATURES:

- 800 ft-lbs. of nut-busting breakaway torque
- Compact design Ideal for tight spaces, 4.4 in.
 Torque selector Maximum torque, 550 ft-lbs.
 Extremely lightweight Composite design, 2.5 lbs.
 Patented Forward/Reverse toggle switch

- Handle exhaust Directs air away from user
- 1/4 in. NPT air inlet with built-in swivel
- Ergonomic grip
- High speed, 9500 RPMAir Consumption: 4.8 CFM
- Drive: 1/2 in.

INCLUDES:

- Flexzilla Pro Mini Impact Wrench
- Flexzilla Pro High Flow 1/4 in. MNPT Ball Swivel Plug



Part No.	Retail Packaging
AT1475FZ	•



Reactionless Mini Air Ratchet Kit







Get in tight spots and get the job done with Flexzilla® Pro Reactionless Mini Air Ratchet. No more busted knuckles. No pinched fingers. The reactionless clutch prevents kickback when you bottom out. The compact and lightweight design is perfect for small workspaces like under automotive dashboards. Plus, its super high-speed lets you remove or tighten bolts in a flash.

Flexzilla Pro Reactionless Mini Air Ratchet Kit (AT8535FZ)

FEATURES:

- Reactionless clutch
- · Built-in air regulator
- · Built-in swivel
- High speed, 700 RPM
- Torque: 45 ft-lbs.
- Rear exhaust
- Compact and lightweight
- Length: 7.5 in.
- Weight: 1.5 lbs.
- Drive: 3/8 in.

KIT INCLUDES:

- Flexzilla Pro Reactionless Mini Air Ratchet
- Flexzilla Pro Custom Length Whip Hose with High Flow Ball Swivel and Reusable Fitting, 3/8 in. x 6 ft.
 Flexzilla Pro High Flow
- Flexzilla Pro High Flow Couplers and Plugs
 - (1) 1/4 in. FNPT Coupler
 - (1) 1/4 in. MNPT Coupler
 - (2) 1/4 in. FNPT Plugs

Part No.	Retail Packaging
AT8535FZ	•



TORQUE	DRIVE
45 FT-LBS.	3/8 IN.
HIGH SPEED	WEIGHT
700 RPM	1.5 LBS.

Reactionless Mini Air Ratchet Kit





Get in tight spots and get the job done with Flexzilla® Reactionless Mini Air Ratchet. No more busted knuckles. No pinched fingers. The reactionless clutch prevents kickback when you bottom out. The compact and lightweight design is perfect for small workspaces, like under automotive dashboards. Plus, its super high-speed lets you remove or tighten bolts in a flash. This convenient kit includes Flexzilla Reactionless Mini Air Ratchet, ColorConnex® X-Flo™ Couplers and Plugs, and a Flexzilla® Whip Hose.

Flexzilla Reactionless Mini Air Ratchet Kit (AT8530FZ)

FEATURES:

- · Reactionless clutch
- High speed, 650 RPM
- Torque: 40 ft-lbs.
- Rear exhaust
- · Compact and lightweight
- Length: 6.5 in.
- · Weight: 1.3 lbs.
- Drive: 3/8 in.

KIT INCLUDES:

- Flexzilla Reactionless Mini Air Ratchet
- Flexzilla Whip Hose, 3/8 in x 2 ft.
- ColorConnex® X-Flo™ Couplers and Plugs
 - (1) X-Flo Coupler, 1/4 in. FNPT
 - (1) X-Flo Coupler, 1/4 in. MNPT
 - (1) Plug, 1/4 in. FNPT
 - (1) Plug, 1/4 in. MNPT

Part No.	Retail Packaging
AT8530FZ	•



TORQUE	DRIVE
45 FT-LBS.	3/8 IN.
HIGH SPEED	WEIGHT
650 RPM	1.3 LBS.



INFLATE AND MONITOR

Inflate and check tire pressure simultaneously at a safe distance.



Tire Inflators



Tire inflators deliver accurate pressure to car, truck, bike, and off-road tires.







AL2000FZ FEATURES:

- Range: 20 to 170 psi
- Straight-on chuck with 12 in. air hose
- Heavy-duty gauge
- Indicator bar is calibrated in 2 psi increments from 20 to 100 psi

AL2025FZ-1 FEATURES:

- Range: 10 to 170 psi
- · Quick-connect coupler and plug
- Trigger actuated deflate function
- Straight lock-on connector
- Dial gauge with protective rubber guard
- Includes: 3 ft. air hose extension

AL2025FZ-2 FEATURES:



- Range: 10 to 170 psi
- Quick-connect coupler and plug
- Trigger actuated deflate function
- Straight lock-on connector
- Dial gauge with protective rubber guard
- Includes: 3 and 15 ft. air hose extensions
- OSHA Compliant 15 ft. hose only

Part No.	Туре	Hose I.D.	Hose Length	Inlet	Body Material	Retail Packaging
AL2000FZ	Tire Inflator	1/4 in.	1 ft.	1/4 in. FNPT	Die-cast Zinc	•
AL2025FZ-1	Inflator	1/4 in.	3 ft.	1/4 in. FNPT	Nylon/Brass	•
AL2025FZ-2	Inflator Kit	1/4 in.	3 ft. & 15 ft.	1/4 in. FNPT	Nylon/Brass	•
HGH2-FZ	Truck Tire Inflator Kit	3/8 in.	50 ft.	1/4 in. MNPT	_	•

Truck Tire Inflator Kit



The Flexzilla® truck tire inflator kit uses a truck's on-board air supply to inflate tires in remote situations.

HGH2-FZ INCLUDES:

- 3/8 in. x 50 ft. air hose
- · Glad-hand attachment
- 30° Dual air chuck





EXCLUSIVE SWIVELGRIP™

SwivelGrip™ action allows the water hose to rotate freely inside the grip. It eliminates twists in the hose as you uncoil it and prevents kinks in the hose as you move across the yard.

(SwivelGrip™ Patent Pending)

EXTREME ALL-WEATHER FLEXIBILITY

Lightweight and easy to handle, Flexzilla® hoses lay flat and have no memory, even in extreme weather conditions.

5/8"

LEGALY

PSI FLEXIBLE HYBRID POLYMER
Flexzilla hoses have a durable 150 Garden

abrasion-resistant outer cover.



SwivelGrip™ Garden and Lead-in Hose Assemblies






Flexzilla® makes it easier to work around your home and lawn. SwivelGrip™ action eliminates twists that occur when uncoiling a hose. Conventional garden hose can trap coils that tighten into kinks as you move across the yard. SwivelGrip releases these trapped coils because the hose rotates freely inside the grip. The large, comfortable gripping surface on both ends of the hose makes connections much easier to turn and tighten. Flexzilla SwivelGrip hoses are also drinking water safe.



Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZG503YWS	5/8 in.	3 ft.	3/4 in 11¹/₂ GHT	•
HFZG505YWS	5/8 in.	5 ft.	3/4 in 11 ¹ / ₂ GHT	•
HFZG510YWS	5/8 in.	10 ft.	3/4 in 11¹/₂ GHT	•
HFZG510YWS-6X	5/8 in.	10 ft.	3/4 in 1111/2 GHT	•
HFZG525YWS	5/8 in.	25 ft.	3/4 in 111/2 GHT	•
HFZG550YWS	5/8 in.	50 ft.	3/4 in 111/2 GHT	•
HFZG550YWS-30X	5/8 in.	50 ft.	3/4 in 11 ¹ / ₂ GHT	•
HFZG550YWS-40X	5/8 in.	50 ft.	3/4 in 11 ¹ / ₂ GHT	•
HFZG575YWS	5/8 in.	75 ft.	3/4 in 11 ¹ / ₂ GHT	•
HFZG5100YWS	5/8 in.	100 ft.	3/4 in 11 ¹ / ₂ GHT	•
Part noe with a -30V or	-40V cuffix incl	uda 30 or 40 bosa	accambliae racpactivaly on	a quarter pallet display

Part no. with a -6X suffix includes 6 hose assemblies in a retail merchandiser display

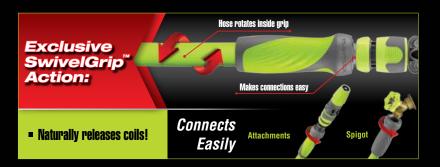

FEATURES:

- Male and female SwivelGrip[™] Connections
 - Exclusive SwivelGrip™ Action
 - Hose rotates inside grip
 - Naturally releases coils
 - Makes connections easy
 - Uncoils easily
- · Extreme all-weather flexibility
- Won't kink under pressure
- · Lightweight, coils easily
- Lays flat no memory
- Durable outer cover resists abrasion, UV and mold
- · Reinforced mid-layering provides extra strength
- · Anodized aircraft aluminum ends
- Tight leak-free connections O-ring seal provides secure, watertight connections
- · Max. working pressure at 70°F: 150 psi
- Drinking water safe









Garden Hose Merchandiser and Pallets







Colors[™] SwivelGrip[™] Garden Hose Assemblies





From the makers of Flexzilla®, Colors™ Garden Hose makes it easier to work around your home and lawn. SwivelGrip™ action eliminates twists that occur when uncoiling a hose. Conventional garden hose can trap coils that tighten into kinks as you move across the yard. SwivelGrip releases these trapped coils because the hose rotates freely inside the grip. The large, comfortable gripping surface on both ends of the hose makes connections much easier to turn and tighten. Colors™ Garden Hose features the same Flexible Hybrid Polymer material as our renowned ZillaGreen™ hoses, but comes in earthy colors that blend in with a variety of landscapes.









SWIVELGRIP™ FEATURES:

- Male and female SwivelGrip™ Connections
 - Exclusive SwivelGrip™ Action
 - Hose rotates inside grip
 - Naturally releases coils
 - Makes connections easy
 - Uncoils easily

Part No.	Color	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZC550BRS	Brown Mulch	5/8 in.	50 ft.	3/4 in 11¹/₂ GHT	•
HFZC550TCS	Red Clay	5/8 in.	50 ft.	3/4 in 11 ¹ / ₂ GHT	•




Garden and Lead-in Hose Assemblies





Flexzilla® Garden Hose was engineered with a lightweight Flexible Hybrid Polymer to lie flat and eliminate kinking under pressure. It redefines flexibility, making it easy to maneuver around trees, bushes or other obstacles. Zero memory means your sprinkler stays put without twisting. And Flexzilla Garden Hose doesn't fight you when you coil it. Plus, with our superior O-ring, you get a long-term, leak-free connection at the spigot. The Flexible Hybrid Polymer inner tube material is drinking water safe.



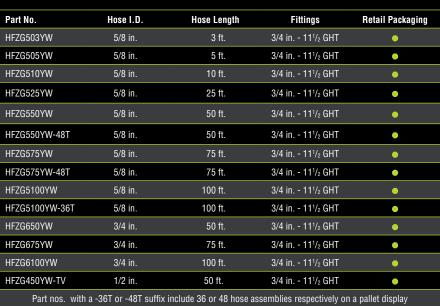

HFZG450YW-TV also includes hose hanger











Garden Hose Kit with Quick Connect Attachments

The Flexzilla® Garden Hose Kit with Quick Connect Attachments features Flexible Hybrid Polymer material with extreme all-weather flexibility that allows hose to lie flat and won't kink under pressure. It's lightweight and coils easily. The convenient Flexzilla Garden Hose Kit comes with hose, twist action nozzle, quick connect flow-stop coupler, spigot adapter, hose adapters and hose hanger to make gardening a snap.



Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZG12050QN	1/2 in.	50 ft.	3/4 in 11 ¹ / ₂ GHT	•

HOSE FEATURES:

- Extreme all-weather flexibility
- Won't kink under pressure
- · Lightweight, coils easily
- · Lays flat no memory
- · Durable outer cover resists abrasion, UV and mold
- Reinforced mid-layering provides extra strength
- · Quick connect couplers
- Max. working pressure at 70°F: 150 psi

SPRAY NOZZLE FEATURES:

- Soft mist for flowers and plants
- Jet spray for long distances (up to 20 ft.)

GARDEN HOSE KIT INCLUDES:

- a Flexzilla Garden Hose with Quick Connect Couplers
- b Hose Hanger
- c Quick Connect Spray Nozzle
- d Quick Connect Spigot Adapter
- e (2) Quick Connect Attachment Adapters



3-Piece Nozzle Kit with Quick Connections

KIT INCLUDES:

- Quick Connect Spray Nozzle
- Soft mist for flowers and plants
- Jet spray for long distances (up to 20 ft.)
- Flow-Stop Coupler Prevents user from being sprayed when connecting and disconnecting
- Quick Connect Attachment Adapter Easily connect to sprinkler or other attachments

Part No.	Retail Packaging
HFZGAK01	-
HFZGAK02	•







Garden Hose Nozzles

Flexzilla™ Garden Hose Nozzles are designed for a wide range of water needs and are suitable for gardening, cleaning, washing your car, or showering dogs and other pets. They are available in a variety of styles, are simple to operate and built to withstand years of tough use.



NFZG62 FEATURES:

- · Variable flow pattern Soft mist to jet spray
- Heavy duty metal construction
- · Soft grip outer housing
- · Compact design

NFZG63 FEATURES:

NFZG63

COMMON FEATURE:

to garden hoses

· Leak-free connections - O-ring seal provides secure, watertight connections

- · Adjustable spray patterns: shower, full, jet, cone
- · Soft grip dial guard



NFZG61 FEATURES:

- Thumb actuated design 3 position
- Heavy duty metal construction
- · Adjustable spray patterns: shower, flat, jet
- Soft grip dial guard
- Ergonomic soft grip handle



NFZG64 FEATURES:

- On/Off toggle switch with variable flow
- 6-pattern adjustable spray patterns: mist, vertical, shower, cone, flat, jet
- · Durable outer housing
- · Soft grip dial guard
- · Lightweight soft grip handle





Part No.	Description	Retail Packaging
NFZG61	Heavy Duty Pistol Grip Garden Hose Nozzle	•
NFZG61-8X	Heavy Duty Pistol Grip Garden Hose Nozzle, 8-Piece Merchandiser	•
NFZG62	Heavy Duty Twist Action Garden Hose Nozzle	•
NFZG63	4-Pattern Twist Action Garden Hose Nozzle	•
NFZG64	6-Pattern Adjustable Garden Hose Nozzle	•
NFZG64-8X	6-Pattern Adjustable Garden Hose Nozzle, 8-Piece Merchandiser	•
NFZG65-E	Metal Adjustable Pistol Grip Garden Hose Nozzle	
NFZG66-E	Metal 7-Pattern Adjustable Pistol Grip Garden Hose Nozzle	
NFZG67-E	Heavy Duty 7-Pattern Adjustable Pistol Grip Garden Hose Nozzle	
NFZG68-E	Heavy Duty Adjustable Flow Pistol Grip Garden Hose Nozzle	-
NFZG69-E	Heavy Duty 7-Pattern Adjustable Flow Pistol Grip Garden Hose Nozzle	
NFZG70-E	3-Pattern Adjustable Watering Wand, 28 in.	-
	Part nos. with -8X suffix include 8 garden nozzles in a retail merchandiser displ	lay





NEW Garden Hose Nozzles (continued)



NFZG65-E FEATURES:

- Rotate nozzle to adjust water flow from a fine mist to a powerful jet stream
- Twist action knob that allows adjustable water flow
- On/off trigger with locking mechanism
- Comfortable non-slip rubber grip
- Compact and lightweight design
- · Durable outer housing



NFZG66-E FEATURES:

- 7 adjustable spray patterns: mist, flat, cone, center, shower, jet, spout
- On/off trigger with locking mechanism
- Comfortable non-slip rubber grip
- · Compact and lightweight design
- Durable outer housing



NFZG67-E FEATURES:

- Heavy duty and durable metal construction
- 7 adjustable spray patterns: mist, vertical, shower, center, cone, flat, jet
- Flow control dial allows greater watering control
- · On/off trigger with locking mechanism
- Soft grip dial guard
- · Twice rubberized grip for extra comfort



NFZG68-E FEATURES:

- Adjustable pressure control adjusts from maximum spray to gentle flow
- Heavy duty metal construction
- Rotate nozzle to adjust water flow from a fine mist to a powerful jet stream
- Soft grip dial guard
- Ergonomic soft grip handle



NFZG69-E FEATURES:

- Adjustable pressure control adjusts from maximum spray to gentle flow
- Heavy duty metal construction
- 7 adjustable spray patterns: mist, vertical, shower, center, cone, flat, jet
- · Soft grip dial guard
- · Ergonomic soft grip handle



NFZG70-E FEATURES:

- Angle adjustable head with 180° rotation
- 28 in. wand to water hanging planters, new plantings and delicate flowers
- On/Off toggle switch with variable flow control and prevention of user fatigue
- 3 adjustable spray patterns: jet, mist, shower
- Soft grip dial guard
- Durable outer housing
- Lightweight soft grip handle



Lawn Sprinklers

Flexzilla[™] Oscillating Lawn Sprinklers are essential tools for watering your lawn or garden. Waters a range up to 2,400 sq. ft. using 18 durable plastic nozzles. The range adjustment collar allows you to set the precise coverage area to efficiently water your yard. Our proven design makes this sprinkler ideal for everyday watering needs.

2,400 SQ. FT.



COMMON FEATURES:

- Range adjustment collar makes it easy to position water where you need it without wasting water on the sidewalk or driveway
- 18 plastic jet nozzles cover up to 2,400 sq. ft. in your lawn or garden
- · Clog resistant filter allows water to flow evenly
- Nozzle cleaning tool and end plug
- Leak-free connections Rubber gasket provides secure, watertight connections to garden hoses

SFZG62-E FEATURES:

• Metal Base - Ensures the sprinkler stays in place and does not flip over during use.

Part No.	Description	Retail Packaging
SFZG61-E	Oscillating Lawn Sprinkler, 2,400 sq. ft.	
SFZG62-E	Oscillating Lawn Sprinkler with Metal Base, 2,400 sq. ft.	-







FIELD REPAIRABLE CUSTOM LENGTHS

Flexzilla® Pro Water Hose is available in pre-assembled coils or in our Custom Hose Centers where the end user can fabricate a custom length hose for any application.

The field repair and custom length hose process takes



CUT – Remove damaged portion of hose or measure and cut desired length at 90° angle.



INSTALL – Slide spiral fitting and nut onto hose.Push hose onto fitting until hose reaches threads.



TIGHTEN – Tighten fitting nut until snug. Slide bend restrictor up and snap onto nut.




Custom Water Hose Centers








The Flexzilla® Pro Custom Water Hose Centers allow you to provide your customers with custom length hose. Using Flexzilla Pro reusable ends, you can quickly and easily create custom length hose assemblies on site. The Custom Water Hose Centers also include Flexzilla SwivelGrip™ Garden lead-in hose assemblies.

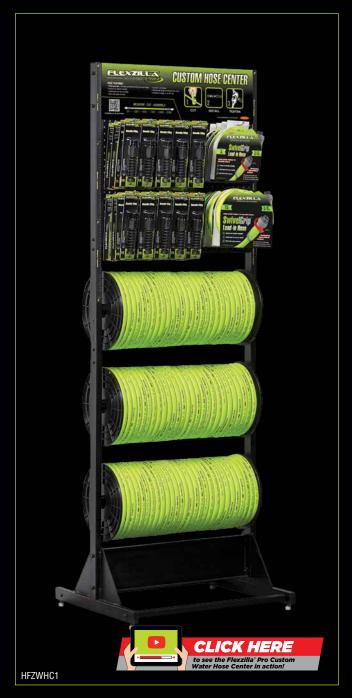

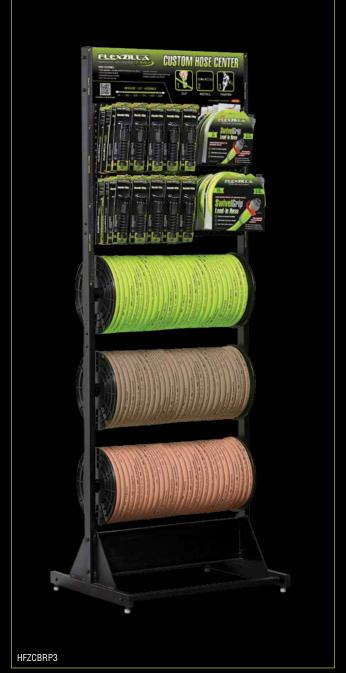

SwivelGrip™ Garden Lead-In hoses are not field repairable



Custom Water Hose Centers (continued)







Part No.	Description	Rack Quantity
	HFZWHC1 - Flexzilla® Pro Custom Water Hose Center	
HFZW58250YW	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, ZillaGreen™	3 ea.
RP900625F	Flexzilla® Pro Water Hose Female Reusable Fitting, 5/8 in.	30 ea.
RP900625M	Flexzilla® Pro Water Hose Male Reusable Fitting, 5/8 in.	30 ea.
HFZG503YWS	Flexzilla® Garden Lead-in Hose with SwivelGrip™, 5/8 in. x 3 ft.	10 ea.
HFZG510YWS	Flexzilla® Garden Lead-in Hose with SwivelGrip™, 5/8 in. x 10 ft.	20 ea.
HR-05	Custom Hose Center (Freestanding Rack)	1 ea.
	HFZCBRP3 - Flexzilla® Pro Colors Custom Water Hose Center	
HFZW58250YW	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, ZillaGreen™	1 ea.
HFZC58250BRS	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, Brown Mulch	1 ea.
HFZC58250TCS	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, Red Clay	1 ea.
RP900625F	Flexzilla® Pro Water Hose Female Reusable Fitting, 5/8 in.	30 ea.
RP900625M	Flexzilla® Pro Water Hose Male Reusable Fitting, 5/8 in.	30 ea.
HFZG503YWS	Flexzilla® Garden Lead-in Hose with SwivelGrip™, 5/8 in. x 3 ft.	10 ea.
HFZG510YWS	Flexzilla® Garden Lead-in Hose with SwivelGrip™, 5/8 in. x 10 ft.	20 ea.
HR-05	Custom Hose Center (Freestanding Rack)	1 ea.
	Parts also sold separately in standard pack quantities	





Water Hose Assemblies











- Field Repairable Reusable anodized aircraft aluminum fittings
- · Extreme all-weather flexibility
- · Lightweight, coils easily
- · Won't kink under pressure
- · Lays flat no memory
- Durable outer cover resists abrasion, UV and mold
- · Reinforced mid-layering provides extra strength
- Leak free connections A durable O-ring provides long lasting leak free connections
- Max. working pressure at 70°F: 150 psi
- Flexzilla Pro Reusable Fittings include bend reinforcement for increased flexibility. Reduces wear and tear, prolonging the life of the hose.
- · Drinking water safe

Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZWP550	5/8 in.	50 ft.	3/4 in 11 ¹ / ₂ GHT	•
HFZWP575	5/8 in.	75 ft.	3/4 in 11 ¹ / ₂ GHT	•
HE7WP5100	5/8 in	100 ft	3/4 in - 111/2 GHT	•









Water Hose Nozzles



FEATURES:

- Precision flow port Inline connection allows water to flow directly, not up and through the handle - increases water flow, pressure and power by approximately 30%
- Multiple spray patterns Select from jet, fan, power or low flow spray perfect for any job in the shop, garage or home
- Ergonomic handle provides an easy grip for less user fatigue
- Machined aircraft aluminum barrel and Santoprene™ rubber handle and head
- Durable, non-marring outer cover that protects painted surfaces
- · Leak-free O-ring outlasts the competition
- Works with 1/2, 5/8 and 3/4 in. water hose



Retractable Water Hose Reel with Levelwind™ Technology





Featuring Levelwind™ – Flexzilla's unique winding system that automatically layers hose back and forth across the reel ensuring that the hose is coiled smoothly, easilv...every time – and includes Flexzilla® water hose and lead-in hose.





FEATURES:

- Latching Mode Switch Choose from latching hose every 3 ft. for extended use or switch to free run for immediate automatic rewinding
- Seven Position Locking Bracket —
 These reels can swivel freely on the mounting bracket up to 135° or can be locked into place using the locking brace.
 Up to seven different locking angles can be utilized (L8300-W)
- Adjustable Hose Stopper Increase or decrease the length of the hose that remains when hose is fully retracted
- Extra Large Swivel A 3/4 in. swivel reduces flow restriction and allows maximum flow
- Freestanding Base Portable Use freestanding or mounted on wall or ceiling. Flat base allows reel to rest on ground
- Built-In Handle For carrying ease
- Durable Construction Made from durable UV stabilized polypropylene
- Lead-in Hose Included 10 ft. x 3/4 in. x 11½ GHT (L8340FZLI)



Retractable Water Hose Reels with Levelwind™ Technology

Part No.	Hose I.D.	Hose Length	Hose Material	Working Pressure @ 70°F	Reel Inlet	Weight	Retail Packaging	Assembled in USA
L8340FZ	1/2 in.	70 ft.	Flexible Hybrid Polymer	150 psi	3/4 in. – 11½ Male GHT	31 lbs.	•	•



Mounting Brackets

L8300-B FEATURES:

- · Includes a seven position locking bracket
- Reel can swivel freely on mounting bracket up to 360° or can be locked into place using the locking brace
- · Mounting options: high wall or bench

L8300-W FEATURES:

- Includes a seven position locking bracket
- Reel can swivel freely on mounting bracket up to 135° or can be locked into place using the locking brace
- · Mounting options: wall or overhead ceiling



NEW

Pressure Washer Hose Assemblies

Flexzilla® offers a revolutionary pressure washer hose that redefines flexibility. Unlike other pressure washer hose, Flexzilla stays flexible when pressurized during use and offers minimal memory when depressurized. It also lays flat and won't work against you before, during or after use.



Part No.	Hose I.D.	Hose Length	Fittings	Yoke/ Stem	Max. Working Pressure @ 70°F	Retail Packaging	Made in USA
HFZPW3425M	1/4 in.	25 ft.	M22	14mm	3,100 psi	•	•
HFZPW3425M-4X	1/4 in.	25 ft.	M22	14mm	3,100 psi	•	•
HFZPW3450M	1/4 in.	50 ft.	M22	14mm	3,100 psi	•	•
HFZPW3450M-3X	1/4 in.	50 ft.	M22	14mm	3,100 psi	•	•
HFZPW3525M	5/16 in.	25 ft.	M22	14mm	3,100 psi	•	•
HFZPW3525M-4X	5/16 in.	25 ft.	M22	14mm	3,100 psi	•	•
HFZPW3550M	5/16 in.	50 ft.	M22	14mm	3,100 psi	•	
HFZPW3550M-3X	5/16 in.	50 ft.	M22	14mm	3,100 psi	•	•
HFZPW36425M	1/4 in.	25 ft.	M22	14mm	3,600 psi	•	•
HFZPW36425M-5X	1/4 in.	25 ft.	M22	14mm	3,600 psi	•	•
HFZPW36450M	1/4 in.	50 ft.	M22	14mm	3,600 psi	•	
HFZPW36450M-3X	1/4 in.	50 ft.	M22	14mm	3,600 psi	•	•
HFZPW40525M	5/16 in.	25 ft.	M22	14mm	4,000 psi	•	•
HFZPW40525M-5X	5/16 in.	25 ft.	M22	14mm	4,000 psi	•	•
HFZPW40550M	5/16 in.	50 ft.	M22	14mm	4,000 psi	•	
HFZPW40550M-3X	5/16 in.	50 ft.	M22	14mm	4,000 psi	•	•
HFZPW426050Q	3/8 in.	50 ft.	Integrated Quick Connect		4,600 psi	•	
HFZPW426050Q-3X	3/8 in.	50 ft.	Integrated Quick Connect	_	4,600 psi	•	•
HFZPW426100Q	3/8 in.	100 ft.	Integrated Quick Connect	-	4,600 psi	•	•
HFZPW426100Q-2X	3/8 in.	100 ft.	Integrated Quick Connect	_	4,600 psi	•	•

FEATURES:

- Extreme flexibility under pressure, from subzero to 140°F
- Made of Flexible Hybrid Polymer material
- Integral non-kink bend restrictor
- Cold water use only
- Available with M22 or Integrated Quick Connect fittings









LIGHTED PLUG

Light up any work site with the lighted power indicator, ensuring you can always find the power source.

GLOW STRIPE

Features a glow-in-the-dark stripe that runs the length of the cord.



Extension Cords



Flexzilla® Pro industrial grade extension cords are engineered to hold up to the toughest jobs. They are easy to coil and remain flexible in temperatures as low as -58°F and up to 140°F. Plus, the grounded plug includes a lighted power indicator which lets you know power is running through the cord. Flexzilla Pro Extension Cords are ideal for outdoor industrial grade applications.

FEATURES:

- Extreme all-weather flexibility (-58°F to 140°F)
- · Abrasion and corrosion-resistant
- Glow-in-the-dark stripe
- Power indicator light
- · Resists kinks and easy to coil
- Grounded plug
- Water Resistant
- · Flame Retardant
- Outdoor use
- cULus Listed









Part No.	Cord Length	Gauge	Retail Packaging
FZ512930	50 ft.	10 ga.	•
FZ512935	100 ft.	10 ga.	•
FZ512825	25 ft.	12 ga.	•
FZ512830	50 ft.	12 ga.	•
FZ512835	100 ft.	12 ga.	•
FZ512725	25 ft.	14 ga.	•
FZ512730	50 ft.	14 ga.	•
FZ512735	100 ft.	14 ga.	•











Flexzilla® Pro Extension Cords are manufactured by Prime Wire & Cable, Inc. in partnership with Legacy Manufacturing Company, and are distributed by both Prime Wire & Cable and Legacy Mfg. Co.




NEW Retractable Extension Cord Reels

Flexzilla® Retractable Extension Cord Reels come pre-loaded with 25 or 50 feet of oil-resistant cord, a lighted triple tap outlet and grounded 5 foot lead-in cord. Each reel also contains a circuit breaker with reset button, adjustable cord stopper, power indicator light, and a swivel mounting bracket. The reels lock the cord out in 1 foot increments. The impact resistant housing protects and stores the extension cord when not in use. These retractable reels are ideal for general, commercial and industrial use.





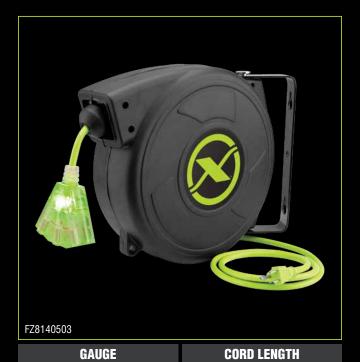

FEATURES:

- Lighted triple tap outlet for plenty of capacity
- Circuit breaker with reset button prevents breaker from tripping and blown fuses
- · Reset circuit at reel
- Oil-Resistant AWG SJTOW cord flexible in low temperatures and resists the effects of oil, water and sunlight
- Swivel mounting bracket pivots in the direction of your work
- Reel can be mounted to wall or ceiling

• Cord locks out in 1 ft. increments

14/3 AWG

- Adjustable cord stopper ensures outlet is always within reach
- Power indicator light
- Grounded plug includes 5 ft. lead-in cord
- Impact resistant housing
- Recommended for dry, indoor locations
- cULus Listed



50 FT.



LISTED

Part No.	Cord Length	Cord Gauge	Max. Watts	Max. Amps	Max. Voltage	Max. Hz	Retail Packaging
FZ8160253	25 ft.	16/3 AWG	1250W	10A	125V	60 Hz	•
FZ8140503	50 ft.	14/3 AWG	1625W	13A	125V	60 Hz	•



NEW Retractable Extension Cord Reel

PRO

The Flexzilla® Pro Retractable Extension Cord Reel comes pre-loaded with 60 feet of cord, a lighted triple tap outlet and grounded 4.5 foot lead-in cord. The 12 gauge oil resistant cord allows you to power heavy-duty equipment in the shop or on the jobsite. The reel utilizes a self-leveling system, which winds the cord evenly as it automatically retracts. The reel also contains a circuit breaker with reset button, adjustable cord stopper, power indicator light, and a swivel mounting bracket. The reel locks the cord out in 2 foot increments. The impact resistant housing protects and stores the extension cord when not in use. This retractable reel is ideal for commercial and industrial use.

FEATURES:

- Self-Leveling System winds the cord evenly
- Lighted triple tap outlet for plenty of capacity
- Circuit breaker with reset button prevents breaker from tripping and blown fuses. Reset circuit at reel
- Power indicator light
- Oil resistant 12/3 AWG SJTOW cord flexible in low temperatures and resists the effects of oil, water and sunlight
- Cord locks out in 2 ft. increments
- Adjustable cord stopper ensures outlet is always within reach
- Grounded plug includes 4.5 ft. lead-in cord
- Swivel mounting bracket pivots in the direction of your work. Reel can be mounted to wall or ceiling
- Impact resistant housing
- Recommended for dry, indoor locations









GAUGE	CORD LENGTH
12/3 AWG	60 FT.

Part No.	Cord	Cord	Max.	Max.	Max.	Max.	Retail
	Length	Gauge	Watts	Amps	Voltage	Hz	Packaging
FZ8120603	60 ft.	12/3 AWG	1875W	15A	125V	60 Hz	•



FLEXZILLA® GREASE HOSE

Stays flexible, even in subzero temperatures.

LED LIGHTING

Keep your work space well-lit long after sundown.

RAPID RELOAD™ TECHNOLOGY

Push button technology that allows for quick cartridge loading and includes a threadless grease barrel. (Rapid Reload™ Push Button Technology Patent Pending)



20V Cordless Grease Gun Kit

There is a new creature dominating automotive shops, farms and worksites across the country. Introducing the Flexzilla® 20V Cordless Grease Gun Kit. It proves what can be accomplished when you combine over 30 years of grease gun experience from Legacy Manufacturing with the extreme performance of Flexzilla.



GREASE GUN FEATURES:

- Rapid Reload™ Push Button Technology
 For fast cartridge loading
 - and unloading
- Includes lightweight threadless grease barrel
 • Flexzilla Grease Hose - 42 in.
 - Extreme cold-weather flexibility
- (subzero to 140°F)
- Non-kink bend restrictor
- LED Light Illuminate workspace
- Ergonomic Grip
- Non-slip Pads Stabilize gun when standing up and laying on its side. Ideal for tight spaces
 • Hose Dock - Secure and manage hose
- Lightweight Aluminum Barrel with Firm Grip Knurling - For better grip and durability
- Positive T-Grip Follower Handle
- Pressure Relief Valve
- 4-Jaw Coupler Provides quality connection, disconnection, and sealing
- · Holds 14 oz. Grease Cartridge (Cartridge not included)
- Delivers up to 7.000 psi

RAPID RELOAD PUSH BUTTON TECHNOLOGY

- For fast cartridge loading

(Patent Pending)



Press to release barrel



Slide barrel out to reload





Part No.	Description	Retail Packaging
L1388LFZ	Flexzilla® 20V Cordless Grease Gun Kit	•
L1388LFZ-B	Flexzilla® 20V Lithium-Ion Rechargeable Battery for L1388LFZ	•
L1388LFZ-C	Flexzilla® 20V Lithium-Ion 1-Hour Quick Charger for L1388LFZ-B	•

L1388LFZ KIT INCLUDES:

- Flexzilla 20V Cordless Grease Gun
- Flexzilla Grease Hose 42 in.
- (2) 20V Lithium-Ion Rechargeable Batteries
- 1-Hour Quick Charger
- · Automatic Air Bleeder
- 4-Jaw Coupler
- · Shoulder Strap
- Carrying Case



Lever Action Grease Gun

The highest standards of engineering and craftsmanship are built into every Flexzilla® Grease Gun making them the choice for those who work in rugged conditions. Flexzilla Grease Hoses are more flexible than traditional rubber or thermoplastic hoses and stay flexible, even in subzero temperatures.

Heavy Duty Lever Action Grease Gun - Variable Stroke



FEATURES:

- · Flexzilla 18 in. Grease Hose -Extreme cold-weather flexibility (subzero to 140°F)
- Soft Barrel Grip Provides better ergonomic control and comfort
- · Heavy-Duty Cast Head Construction -For maximum durability and longer service life
- · Durable Follower Rod And Spring -For consistent priming
- Bleeder Valve For purging unwanted air
 Variable Stroke Allows grease delivery in confined areas
- 4-Jaw Coupler Provides quality connection, disconnection, and sealing
- · 3-Way Loading Cartridge, bulk, filler nipple
- Wide Grip Clearance
- Holds 14 oz. Grease Cartridge
- Includes 6 in. rigid extension

Part No.	Retail Packaging
L1355FZ	•

Quick-Release Grease Coupler

The Flexzilla™ Quick-Release Grease Coupler features a patented, innovative design which enables quick and easy connections to grease fittings, even in tight spaces. The Quick-Release Grease Coupler features a spring latch for positive engagement and allows for one-handed operation. When the fitting becomes pressurized, depress the thumb lever and release the coupler. No more stuck on couplers and broken grease fittings. Plus, the Quick-Release Grease Coupler eliminates grease spurts when disconnecting, keeping your workspace clean.

FEATURES:

- 6-Jaw Coupler with high strength steel jaws provide improved clamping force on the zerk
- Releases easily under high pressure
- · Spring latch for positive engagement
- Ergonomic thumb lever provides effortless one-handed coupling and uncoupling, even under pressure - no more struggling when removing coupler
- · Compact design is ideal for use in tight spaces, 2.9 in. long by 1.2 in. tall
- · Compatible with all sizes and forms of mounts, fits all SAE and metric zerk fittings
- For use with most manual, battery and air operated grease guns and pumps
- Patented design

Part No.	FNPT Fitting	Retail Packaging
L2050FZ	1/8 in.	•





Grease Hoses



Flexzilla™ Grease Hoses are more flexible than traditional rubber or thermoplastic hoses and stay flexible, even in subzero temperatures.



FEATURES:

- Extreme cold-weather flexibility10,000 psi working pressure
- For use with manual, battery or air operated grease guns
- Coupler sold separately



Part No.	Description	Hose I.D.	Hose Length	MNPT Fitting	Spring Guard	Retail Packaging
L2910FZ	Flexzilla® 12 in. Grease Hose	3/16 in.	12 in.	1/8 in.	-	•
L2910FZSP	Flexzilla® 12 in. Grease Hose w/ Spring Guard	3/16 in.	12 in.	1/8 in.	Yes	•
L2915FZ	Flexzilla® 18 in. Grease Hose	3/16 in.	18 in.	1/8 in.		•
L2915FZSP	Flexzilla® 18 in. Grease Hose w/ Spring Guard	3/16 in.	18 in.	1/8 in.	Yes	•
L2925FZ	Flexzilla® 36 in. Grease Hose	3/16 in.	36 in.	1/8 in.		•
L2925FZSP	Flexzilla® 36 in. Grease Hose w/ Spring Guard	3/16 in.	36 in.	1/8 in.	Yes	•
L2930FZSP	Flexzilla® 42 in. Grease Hose w/ Spring Guard	3/16 in.	42 in.	1/8 in.	Yes	•
L2950FZ	Flexzilla® 12 in. Grease Hose	1/8 in.	12 in.	1/8 in.	-	•
L2950FZSP	Flexzilla® 12 in. Grease Hose w/ Spring Guard	1/8 in.	12 in.	1/8 in.	Yes	•
L2955FZ	Flexzilla® 18 in. Grease Hose	1/8 in.	18 in.	1/8 in.	-	•
L2955FZSP	Flexzilla® 18 in. Grease Hose w/ Spring Guard	1/8 in.	18 in.	1/8 in.	Yes	•
L2965FZ	Flexzilla® 36 in. Grease Hose	1/8 in.	36 in.	1/8 in.	-	•
L2965FZSP	Flexzilla® 36 in. Grease Hose w/ Spring Guard	1/8 in.	36 in.	1/8 in.	Yes	•





DEXTERITY Impact HD Pro Gloves HIGH **NEW**

Redesigned from cuff to finger tips, Flexzilla® Gloves have been reengineered using carefully selected materials to ensure extreme flexibility, rugged durability and unrivaled comfort. Flexzilla has you covered, from light-duty gardening to heavy-duty automotive or construction projects. Flexzilla Gloves are available in a wide variety of sizes and styles for any job.



GH700P FEATURES:

- Thermoplastic Rubber (TPR) knuckle and finger impact protection
- Touchscreen technology Thumb, index and middle fingers
 Durable, padded synthetic leather palm
- PVC palm padding
- Breathable 4-Way spandex Keeps hands cool and comfortable
- · Reinforced wear points: Fingertips and thumb saddle
- Terry cloth brow wipe
- Lycra panels between fingers for superior breathability
- · Contoured neoprene wrist
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

TPR KNUCKLE AND FINGER IMPACT PROTECTION

IDEAL FOR: Heavy Equipment, Construction, Demolition, Automotive, Towing

Part No.	Size	Men's
GH700PM	М	•
GH700PL	L	•
GH700PXL	XL	•
GH700PXXL	XXL	•





HIGH DEXTERITY Utility Gloves

GH100 FEATURES:

- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- Padded knuckle reinforcement
- · Reinforced wear points: Fingertips and thumb saddle
- · Lycra panels between fingers for superior breathability
- · Shirred elastic wrist
- Thermoplastic Rubber (TPR) pull tab
- Machine washable Lay flat to dry

IDEAL FOR: General Tasks

Part No.	Size	Men's
GH100M	М	•
GH100L	L	•
GH100XL	XL	•
GH100XXL	XXL	•





HIGH DEXTERITY General Purpose Gloves

GH300 FEATURES:

- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- · Padded knuckle reinforcement
- · Reinforced wear points: Fingertips and thumb saddle
- Terry cloth brow wipe
- Neoprene wrist
- Lycra panels between fingers for superior breathability
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- · Machine washable Lay flat to dry

IDEAL FOR: Multipurpose, Maintenance, Equipment, DIY

Part No.	Size	Men's
GH300M	М	•
GH300L	L	•
GH300XL	XL	•





DEXTERITY Fingerless Gloves HIGH

GH330 FEATURES:

- Finger pulls for quick and easy glove removal
 Polyurethane non-slip grip palm and thumb back
 Lightweight Lycra back Keeps hands cool and comfortable
- 4-Way spandex knuckle reinforcement
- Terry cloth brow wipe
- · Neoprene wrist
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

QUICK & EASY GLOVE REMOVAL FINGER PULLS

IDEAL FOR: Cross-functional, Mechanic, Sports

Part No.	Size	Men's
GH330M	М	•
GH330L	L	•
GH330XL	XL	•
GH330XXL	XXL	•





HIGH DEXTERITY FlexFit Gloves

GH360 FEATURES:

- Touchscreen technology All fingers
- · Durable, padded polyurethane palm Extreme comfort and tactility
- Flexible spandex Keeps hands cool and comfortable
 Back of finger PVC reinforcement
- Lycra panels between fingers for superior breathability
- Contoured neoprene wrist
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

IDEAL FOR: Cross-functional, Mechanic, Sports, Driving

Part No.	Size	Men's
GH360M	М	•
GH360L	L	•
GH360XL	XL	•
GH360XXL	XXL	•





NEW

DEXTERITY Zillanator™ Pro Gloves HIGH



GH361P FEATURES:

- Touchscreen technology Thumb, index and middle fingers
 Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- · Padded knuckle reinforcement
- · Reinforced wear points: Fingertips and thumb saddle
- Terry cloth brow wipe
- Neoprene wrist
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

IDEAL FOR: Multipurpose, Mechanic, Contractor

Part No.	Size	Men's
GH361PM	M	•
GH361PL	L	•
GH361PXL	XL	•
GH361PXXL	XXL	•



NEW

HIGH DEXTERITY Reflector Pro Gloves

GH400P FEATURES:

- 3M™ Scotchlite™ Reflective Material on knuckle and fingertips
- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- · Padded knuckle reinforcement
- · Reinforced wear points: Fingertips and thumb saddle
- Terry cloth brow wipe
- · Lycra panels between fingers for superior breathability
- Contoured neoprene wrist
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

3M™ SCOTCHLITE™ REFLECTIVE MATERIAL

IDEAL FOR: Safety, Emergency, Construction, Towing

Part No.	Size	Men's
GH400PM	М	•
GH400PL	L	•
GH400PXL	XL	•





HIGH DEXTERITY Water-Resistant Hybrid Grain Leather Pro Gloves

GH460P FEATURES:

- Water-resistant hybrid grain leather palm
- Touchscreen technology Thumb, index and middle fingers
- Breathable 4-Way spandex Keeps hands cool and comfortable
- Durable, padded hybrid grain leather knuckle reinforcement
- Reinforced wear points: Fingertips and leather thumb saddle
- Terry cloth brow wipe
- Lycra panels between fingers for superior breathability
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit

IDEAL FOR: Construction, Contractor, Landscaping

Part No.	Size	Men's
GH460PM	М	•
GH460PL	L	•
GH460PXL	XL	•







DEXTERITY General Purpose Winter Gloves HIGH

GH500 FEATURES:

t inside – Keeps hands warm and comfortable

- 3M[™] Thinsulate[™] liner 70g
- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex
- · Padded knuckle reinforcement
- · Reinforced wear points: Fingertips and thumb saddle
- · Lycra panels between fingers for superior breathability
- · Shirred elastic wrist
- Thermoplastic Rubber (TPR) pull tab
- Machine washable Lay flat to dry

3M™ THINSULATE™ LINER - 70G **KEEPS HANDS WARM**

IDEAL FOR: General Tasks, Maintenance, DIY

Part No.	Size	Men's
GH500L	L	•
GH500XL	XL	•





HIGH

DEXTERITY Multipurpose Winter Gloves

GH501 FEATURES:

- t Keeps hands warm and comfortable
- 3M[™] Thinsulate[™] liner 70g
- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex
- · Padded knuckle reinforcement
- · Reinforced wear points: Fingertips and thumb saddle
- · Terry cloth brow wipe
- · Lycra panels between fingers for superior breathability
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

3M™ THINSULATE™ LINER - 70G

KEEPS HANDS WARM

IDEAL FOR: Multipurpose, Maintenance, Equipment, DIY

Part No.	Size	Men's
GH501L	L	•
GH501XL	XL	•





HIGH DEXTERITY Thornproof Garden Gloves



PUNCTURE-RESISTANT NEOPRENE GAUNTLET

Part No.	Size	Men's
GH200M	М	•
GH200L	L	•
GH200XL	XL	•

GH200 FEATURES:

- Puncture-resistant neoprene gauntlet protects forearms from scratches
 Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- Synthetic leather knuckle reinforcement
- · Reinforced wear points: Fingertips and thumb saddle
- Synthetic leather between fingers
- Elasticized wrist
- Thermoplastic Rubber (TPR) pull tab
- Machine washable Lay flat to dry

IDEAL FOR: Trimming or Pruning of Rose Bushes, Holly Bushes, Berry Bushes and Other Thorned Shrubs





DEXTERITY Utility Garden Gloves HIGH

WOMEN

GH201 FEATURES:

- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- Padded knuckle reinforcement
- Reinforced wear points: Fingertips and thumb saddle
- · Lycra panels between fingers for superior breathability
- · Shirred elastic wrist
- Thermoplastic Rubber (TPR) pull tab
- Machine washable Lay flat to dry

IDEAL FOR: Garden, Landscaping, General Tasks

Part No.	Size	Women's
GH201S	S	•
GH201M	М	•
GH201L	L	•



HIGH DEXTERITY General Purpose Garden Gloves WOMEN

GH202 FEATURES:

- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- · Padded knuckle reinforcement
- · Reinforced wear points: Fingertips and thumb saddle
- Neoprene wrist
- · Lycra panels between fingers for superior breathability
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

IDEAL FOR: Garden, Landscaping, General Tasks

Part No.	Size	Women's
GH202S	S	•
GH202M	М	•
GH202L	L	•



MEN'S SIZING COATED-PALM DIP GLOVES





BLACK = LARGE

ZILLAGREEN = XL

GRAY = XXL



PALM-COATED DIP ZillaGrip™ Polyurethane Dip Gloves



GC300 FEATURES:

- Durable and abrasion-resistant polyurethane palm coating
- Excellent grip on wet and oily surfaces
- Superior comfort
- Breathable 100% polyester shellElastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

EXCELLENT GRIP WET & OILY SURFACES

IDEAL FOR: Automotive, Mechanical, Equipment, Power & Hand Tools

AVAILABLE IN SINGLE & 2-PAIR PACKS

Part No.	Size	Men's
GC300M	М	•
GC300L	L	•
GC300XL	XL	•
GC300M-2X	M	•
GC300L-2X	L	•
GC300XL-2X	XL	•





Nitrile Dip Gloves PALM-COATED DIP

GC100 FEATURES:

- Touchscreen technology All fingers
- · Durable and abrasion-resistant nitrile palm coating
- Excellent grip on oily surfaces
- Breathable 100% polyester shell
- Elastic band cuff keeps out dirt and debris
 Machine washable Lay flat to dry

IDEAL FOR: Automotive, Mechanical, Equipment, Power & Hand Tools, General Purpose, DIY

AVAILABLE IN SINGLE & 6-PAIR PACKS

Part No.	Size	Men's
GC100L	L	•
GC100XL	XL	•
GC100L-6X	L	•
GC100XL-6X	XL	•
GC100L-6X-12Q	L	•
GC100XL-6X-12Q	XL	•
Б	100 ("	

Part nos. with a -12Q suffix include (12) 6-Pair Packs in a retail merchandiser display





Cut-Resistant Pro Sandy Nitrile Dip Gloves PALM-COATED DIP

GC160P FEATURES:

- 360° ANSI level 5 cut-resistance protects hands
- Breathable 100% polyester shell
- Touchscreen technology All fingers
- · Durable and abrasion-resistant sandy nitrile palm coating
- Non-slip grip in wet, dry and oily conditions
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

CUT-RESISTANT 360° ANSI LEVEL 5

IDEAL FOR: Safety, Glass, Power Tools, Handling Blades & Knives, Handling Broken Glass, Maintenance & Repair, Equipment Operation, Landscaping, DIY, Manufacturing, Construction

Part No.	Size	Men's
GC160PL	L	•
GC160PXL	XL	•







PALM-COATED DIP Impact Pro Sandy Nitrile Dip Gloves



GC161P FEATURES:

- Thermoplastic Rubber (TPR) knuckle and finger protection
- Touchscreen technology All fingers
- Durable and abrasion-resistant sandy nitrile palm coating
- Non-slip grip in wet, dry and oily conditions
- Breathable 100% polyester shellElastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

TPR KNUCKLE AND FINGER IMPACT PROTECTION

IDEAL FOR: Automotive, Mechanical, Equipment, Power & Hand Tools, Construction, Demolition

Part No.	Size	Men's
GC161PL	L	•
GC161PXL	XL	•





Foam Latex Dip Gloves PALM-COATED DIP

GC220 FEATURES:

- · Durable and abrasion-resistant foam latex palm coating
- Breathable polyester shell
- · Textured for enhanced durability and grip
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

TEXTURED PALM COATING

ENHANCED DURABILITY & GRIP

IDEAL FOR: Automotive, Mechanical, Power & Hand Tools, General Purpose, DIY

Part No.	Size	Men's
GC220L	L	•
GC220XL	XL	•





Crinkle Latex Dip Gloves PALM-COATED DIP

GC240 FEATURES:

- Durable and abrasion-resistant crinkle latex palm coating
- · Heavy texture channels away liquids to keep a positive grip
- Excellent grip on wet and dry surfacesBreathable 100% polyester shell
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

WET & DRY SURFACES

EXCELLENT GRIP

IDEAL FOR: Garden, Landscaping, Power & Hand Tools, DIY

Part No.	Size	Men's
GC240L	L	•
GC240XL	XL	•







PALM-COATED DIP 3/4 Crinkle Latex Dip Pro Gloves



GC241P FEATURES:

- Durable and abrasion-resistant 3/4 crinkle latex palm dip
- Heavy texture channels away liquids to keep a positive grip
- Excellent grip on wet and dry surfaces
- Breathable 100% polyester shell
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

EXCELLENT GRIP WET & OILY SURFACES

IDEAL FOR: Automotive, Construction, DIY

Part No.	Size	Men's
GC241PM	М	•
GC241PL	L	•
GC241PXL	XL	•



WOMEN'S SIZING COATED-PALM DIP GLOVES



ZILLAGREEN = SMALL



WHITE = MEDIUM



BLACK = LARGE



PALM-COATED DIP Foam Latex Dip Garden Gloves

WOMEN

GC221 FEATURES:

- · Durable and abrasion-resistant foam latex palm coating
- Breathable polyester shell
- · Textured for enhanced durability and grip
- · Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

IDEAL FOR: Garden, Landscaping, General Tasks

TEXTURED PALM COATING			
ENHANCED DURABILITY & GRIP			
Part No.	Size	Women's	
GC221S	S	•	
GC221M	М	•	
GC221L	L	•	





PALM-COATED DIP Bamboo Crinkle Latex Dip Garden Gloves

GC290 FEATURES:

- Sustainable bamboo shell with nylon and lycra fibers
- · Naturally cool and comfortable
- · Crinkle latex palm coating
- Textured channels away liquids and to a keep positive grip
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

IDEAL FOR: Garden, Landscaping, General Tasks

SUSTAINABLE BAMBOO SHELL COOL & COMFORTABLE

Part No.	Size	Women's
GC290M	М	
GC290L	L	•







PALM-COATED DIP 3/4 Nitrile Dip Winter Gloves

GC180 FEATURES:

- 3/4 Nitrile coating Textured and double dipped for water resistance
- Heavyweight napped terry knit shell with acrylic lining
- 15-Gauge nylon and high polyethylene outer liner
- Durable and abrasion-resistant with excellent grip on oily surfaces
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

OILY SURFACES EXCELLENT GRIP

IDEAL FOR: Automotive, Mechanical, Equipment, Power & Hand Tools, General Purpose, DIY

Part No.	Size	Men's
GC180L	L	•
GC180XL	XL	•





PALM-COATED DIP Full Nitrile Dip Winter Gloves

GC181 FEATURES:

- Full nitrile coating Textured and double dipped for water resistance
- Heavyweight napped terry knit shell with acrylic lining
- 15-Gauge nylon and high polyethylene outer liner
- Durable and abrasion-resistant with excellent grip on oily surfaces
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

TEXTURED & DOUBLE DIPPED WATER-RESISTANT COATING

IDEAL FOR: Automotive, Mechanical, Equipment, Power & Hand Tools, General Purpose, DIY

Part No.	Size	Men's
GC181L	L	•
GC181XL	XL	•





HEAVY DUTY CLEANING

NEW

Neoprene Long Cuff Pro Gloves

GC400P FEATURES:

- Reusable neoprene material for multiple wears
- Protects against hazardous materials
- · Raised non-slip pattern palm and fingertips
- · Cotton flocked interior lining for comfort and easy on and off flexibility
- 13 in. long cuff design protects wrists and forearms
- · Water-resistant

IDEAL FOR: Chemical Processing, Commercial, Degreasing, Fishing, Galvanizing, General Purpose, Oil Handling, Petrochemical, Mechanical

PROTECTS WRISTS & FOREARMS AGAINST HAZARDOUS MATERIALS

Part No.	Size	Men's
GC400PM	М	•
GC400PL	L	•
GC400PXL	XL	•



HEAVY DUTY CLEANING



PVC Long Cuff Pro Gloves

GC500P FEATURES:

- Reusable food grade PVC material for multiple wears
- Protects against hazardous materials
- Non-slip textured palm
- · Cotton interior lining for comfort and easy on and off flexibility
- 12 in. long cuff design protects wrists and forearms
- · Water-resistant

IDEAL FOR: Degreasing, Acids & Caustics, Agriculture, Construction, Chemical Handling, Food, General Maintenance, Oil Handling, Petrochemical

BUILT FOR MULTIPLE WEARS FOOD GRADE PVC

Part No.	Size	Men's
GC500PL	L	•
GC500PXL	XL	•





NEW

LEATHER

Goatskin Leather Gloves

FEATURES:

- Goatskin leather construction
- · Superior comfort and unimpeded dexterity
- Naturally soft, breathable and stretchable
- Reinforced suede palm patch
- Keystone thumb design
- · Shirred elastic wrist

BREATHABLE AND STRETCHABLE NATURALLY SOFT

IDEAL FOR: Construction, Contractor, Landscaping, Garden, General Tasks

Part No.	Size	Men's	Women's
GL30M	М	•	
GL30L	L	•	
GL30XL	XL	•	
GL31S	S		•
GL31M	М		•
GL31L	L		•





LEATHER

Grain Leather Gloves

FEATURES:

- Grain leather construction
- · Excellent comfort and unimpeded dexterity
- Naturally durable and breathable
- Withstands moisture without becoming stiff
- Reinforced suede palm patch
- Keystone thumb design
- · Shirred elastic wrist

EXCELLENT COMFORT UNIMPEDED DEXTERITY

IDEAL FOR: Construction, Contractor, Landscaping, Garden, General Tasks

Part No.	Size	Men's	Women's
GL20M	M	•	
GL20L	L	•	
GL20XL	XL	•	
GL21S	S		•
GL21M	М		
GL21L	L		•







Merchandising Options

Clip Strips





Sidekick Display





Merchandising Options

Dump Bin





PDQ with Peg Hook



PDQs







ADJUSTABLE TEMPLES

Get the perfect fit with Flexzilla™ Pro models by adjusting the angle and length of the temples.

99.99% UV PROTECTION

Constructed for all-day wear featuring superior UV protection that shields your eyes from harmful ultraviolet light.



Impact Resistant Protective Eyewear

Flexzilla[™] Impact Resistant Protective Eyewear helps keep your focus on any project, whether at home or on the jobsite. Available in two eye-catching styles with clear or tinted lens, Flexzilla has you covered. Each pair of Flexzilla Protective Eyewear feature 99.99% UV protection, a flexible and soft temple, and soft nose bridge.


IDEAL PROMO ITEMS

EFZ01C & EFZ01S FEATURES:

- Black frames with black or clear lens
- For Indoor/Outdoor Use
- Meets ANSI Z87.1
- 99.99% UV protection
- Optically correct
- · Flexible, soft temple
- Soft nose bridge
- · Anti-scratch lens

EFZ02CP & EFZ02SP FEATURES:

- · Black frames with black or clear lens
- For Indoor/Outdoor Use
- Adjustable temples
- Meets ANSI Z87.1
- 99.99% UV protection
- Optically correct
- Flexible, soft temple
- Soft nose bridge
- · Hard coated lens
- Includes protective bag



Part No.	Lenses	Retail Packaging
EFZ01C	Clear	•
EFZ01S	Tinted	•
EFZ02CP	Clear	•
EFZ02SP	Tinted	•















Water Hoses, Reels and Nozzles





- Garden Hose Nozzles
- Garden Hose Nozzle Kits
- Pro Water Hose Nozzles
- Garden Lead-in Hoses
- Pressure Washer Hoses
- SwivelGrip™ Garden Hoses
 Garden Hoses
- Garden Hose Kits with Quick Connect Attachments
- Pro Water Hoses Field Repairable
- Water Hose Reels



- Colors™ SwivelGrip™ Garden Hoses
 Available in Colors:
- Brown Mulch
- Red Clay

Greasing Equipment, Blow Guns and Assorted Products





Items Shown:

- Grease Hoses
- Grease Guns Lever Action
- Grease Guns 20V Cordless Kit

- Blow Guns and Kits
- Pro Extension Cords
- 11-Piece Air Hose Compressor Kits
- Truck Tire Inflator Kits
- Air Hose Reels with Levelwind™ Technology
- Extension Cord Reels

Air Tool Kits, Hoses and Assorted Products





Items Shown:

- Recoil Hoses
- Whip Hoses
- Tire Inflators
- Pro High Flow Couplers and Plugs
- Pro Reusable Fittings and Splicers
- Air Hoses
- Pro Air Hoses Field Repairable
- Air Hose Reels
- Extension Cord Reels

- Pro High Flow Couplers and Plugs
- Pro Custom Length Whip Hoses
- Pro Reciprocating Mini Air Ratchet Kits
- Pro Reactionless Mini Air Saw Kits
- Pro Mini Impact Wrench
- Pro Air Hoses Field Repairable

Hose Reel Display Rack, Reels, and Air Hoses

Items Shown:

- Gondola Mounted Hose Reel Display Rack (HR-20)
- Air Hoses
- Air Hose Reels

Gondola Mounted Hose Reel Display Rack: Allows up to five Legacy or

Allows up to five Legacy or Flexzilla reels to be mounted for in-store display.

COMPATIBLE WITH 4 FT. LOZIER GONDOLA SHELVING



HR-20 FEATURES:

- Unique mounting patterns accomodate any Legacy or Flexzilla hose reel
- Interlocking tabs compatible with 4 ft. Lozier gondola shelving uprights
- Secondary mount holes for attaching to other structures



Work Gloves





- **Items Shown:** Garden Gloves
- Leather GlovesHigh Dexterity Gloves
- Winter GlovesPalm-Coated Dip Gloves
- Gloves PDQs
- Nitrile Disposable Gloves

- Items Shown:


 Glove PDQs with Peg Hooks

 Nitrile Disposable Gloves

 Small Glove PDQs

- Large Glove PDQ

Custom Hose Centers

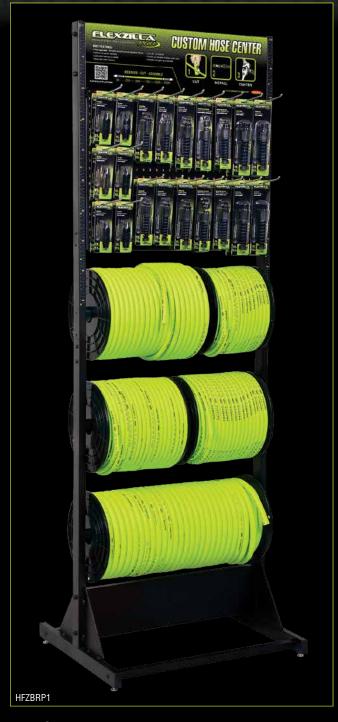

- Items Shown:
 Reusable Fittings and Splicers
 Bulk Air Hose
 Bulk Water Hose



- Items Shown:
 Reusable Fittings and Splicers
 Bulk Air Hose
 Bulk Water Hose

Custom Water Hose Centers



- Items Shown:
 Reusable Water Fittings
 SwivelGrip™ Lead-in Hoses
 Bulk Water Hose



- Reusable Water Fittings
 SwivelGrip™ Lead-in Hoses
 Bulk Flexzilla® Water Hose, ZillaGreen™
 Bulk Colors® Water Hose, Brown Mulch
 Bulk Colors® Water Hose, Red Clay

ADEX

A53416FZ 35 A53416FZ-X 35 A53426FZ 35 A53426FZ-X 35 A53430FZ-2PK 35 A53430FZ-2PK 35 A53440FZBS 35 A53440FZBS 35 A53440FZ-X 35 A53440FZ-X 35 A53452FZ 36 A53457FZ 36 A53616FZ 35 A53616FZ 35 A53626FZ 35 A53630FZ-2PK 35 A53630FZ-PK 35 A53630FZ-PK 35 A53630FZ-Y 35 A53650FZ 38 A55630FZ 38 A55630FZ 38 A55630FZ 38 A55630FZ 38 A55830FZ 38 A55830FZ 38 A55830FZ 38 A55830FZ 38 A55856FZ 38	Part No.	Pg.
A53426FZ 35 A53426FZ-X 35 A53430FZ-2PK 35 A53430FZ-X 35 A53440FZ-2PK 35 A53440FZBS 35 A53440FZBS-X 35 A53440FZ-X 35 A53452FZ 36 A53452FZ 36 A53458FZ 36 A53616FZ 35 A53626FZ 35 A53630FZ-2PK 35 A53630FZ-2PK 35 A53630FZ-2PK 35 A53640FZ-X 35 A53640FZ-X 35 A53657FZ 36 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55628FZ 38 A55630FZ 38 A55830FZ 38 A55856FZ 38	A53416FZ	35
A53426FZ-X 35 A53430FZ-2PK 35 A53430FZ-2PK 35 A53440FZBS 35 A53440FZBS 35 A53440FZBS-X 35 A53440FZ-X 35 A53452FZ 36 A53452FZ 36 A53458FZ 36 A53616FZ 35 A53626FZ 35 A53630FZ-2PK 35 A53630FZ-2PK 35 A53640FZ-Y 35 A53640FZ-Y 35 A536567FZ 36 A55668FZ 38 A55668FZ 38 A55688FZ 38 A55888FZ 38 A55880FZ 38	A53416FZ-X	35
A53430FZ-2PK 35 A53440FZ-2PK 35 A53440FZBS 35 A53440FZBS-X 35 A53440FZBS-X 35 A53440FZ-X 35 A53452FZ 36 A53452FZ 36 A53458FZ 36 A53616FZ-X 35 A53626FZ-X 35 A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-2PK 35 A53640FZ-2PK 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55628FZ 38 A55630FZ 38 A55830FZ 38	A53426FZ	35
A53430FZ-X 35 A53440FZ-2PK 35 A53440FZBS 35 A53440FZBS-X 35 A53440FZ-X 35 A53452FZ 36 A53452FZ 36 A53458FZ 36 A53616FZ 35 A53616FZ-X 35 A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-2PK 35 A53640FZ-2PK 35 A53640FZ-2PK 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55830FZ 38 A55856FZ 38	A53426FZ-X	35
A53440FZ-2PK 35 A53440FZBS 35 A53440FZBS-X 35 A53440FZ-X 35 A53452FZ 36 A53458FZ 36 A53616FZ 35 A53616FZ-X 35 A53626FZ 35 A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-Y 35 A53640FZ-2PK 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38 A55856FZ 38	A53430FZ-2PK	35
A53440FZBS 35 A53440FZBS-X 35 A53440FZ-X 35 A53452FZ 36 A53458FZ 36 A53616FZ 35 A53616FZ-X 35 A53626FZ 35 A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-Y 35 A53640FZ-2PK 35 A53640FZ-X 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55818FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38 A55856FZ 38	A53430FZ-X	35
A53440FZBS-X 35 A53440FZ-X 35 A53452FZ 36 A53457FZ 36 A53458FZ 36 A53616FZ 35 A53616FZ-X 35 A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-2PK 35 A53640FZ-2PK 35 A53640FZ-X 35 A53657FZ 36 A53657FZ 36 A55618FZ 38 A55630FZ 38 A55640FZ 38 A55818FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38 A55856FZ 38	A53440FZ-2PK	35
A53440FZ-X 35 A53452FZ 36 A53457FZ 36 A53458FZ 36 A53616FZ 35 A53616FZ-X 35 A53626FZ 35 A53626FZ-X 35 A53630FZ-2PK 35 A53640FZ-2PK 35 A53640FZ-Y 35 A53640FZ-Y 35 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55630FZ 38 A55630FZ 38 A55830FZ 38	A53440FZBS	35
A53452FZ 36 A53457FZ 36 A53458FZ 36 A53616FZ 35 A53616FZ-X 35 A53626FZ 35 A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-Y 35 A53640FZ-2PK 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55856FZ 38 A55856FZ 38	A53440FZBS-X	35
A53457FZ 36 A53458FZ 36 A53616FZ 35 A53616FZ-X 35 A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-X 35 A53640FZ-2PK 35 A53640FZ-Y 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55640FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A53440FZ-X	35
A53458FZ 36 A53616FZ 35 A53616FZ-X 35 A53626FZ 35 A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-Y 35 A53640FZ-Y 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55640FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38 A55856FZ 38	A53452FZ	36
A53616FZ 35 A53616FZ-X 35 A53626FZ 35 A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-X 35 A53640FZ-2PK 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55656FZ 38 A55818FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A53457FZ	36
A53616FZ-X 35 A53626FZ 35 A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-X 35 A53640FZ-2PK 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55656FZ 38 A55818FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38 A55856FZ 38	A53458FZ	36
A53626FZ 35 A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-X 35 A53640FZ-2PK 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55640FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55856FZ 38 A55856FZ 38	A53616FZ	35
A53626FZ-X 35 A53630FZ-2PK 35 A53630FZ-X 35 A53640FZ-2PK 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55656FZ 38 A55818FZ 38 A55828FZ 38 A55840FZ 38 A55856FZ 38 A55856FZ 38	A53616FZ-X	35
A53630FZ-2PK 35 A53630FZ-X 35 A53640FZ-2PK 35 A53640FZ-X 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55640FZ 38 A55818FZ 38 A55818FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55830FZ 38 A55830FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A53626FZ	35
A53630FZ-X 35 A53640FZ-2PK 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55640FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A53626FZ-X	35
A53640FZ-2PK 35 A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55640FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A53630FZ-2PK	35
A53640FZ-X 35 A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55640FZ 38 A55656FZ 38 A55818FZ 38 A55828FZ 38 A55840FZ 38 A55856FZ 38	A53630FZ-X	35
A53657FZ 36 A55618FZ 38 A55628FZ 38 A55630FZ 38 A55640FZ 38 A55656FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A53640FZ-2PK	35
A55618FZ 38 A55628FZ 38 A55630FZ 38 A55640FZ 38 A55656FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A53640FZ-X	35
A55628FZ 38 A55630FZ 38 A55640FZ 38 A55656FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A53657FZ	36
A55630FZ 38 A55640FZ 38 A55656FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A55618FZ	38
A55640FZ 38 A55656FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A55628FZ	38
A55656FZ 38 A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A55630FZ	38
A55818FZ 38 A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A55640FZ	38
A55828FZ 38 A55830FZ 38 A55840FZ 38 A55856FZ 38	A55656FZ	38
A55830FZ 38 A55840FZ 38 A55856FZ 38	A55818FZ	38
A55840FZ 38 A55856FZ 38	A55828FZ	38
A55856FZ 38	A55830FZ	38
	A55840FZ	38
A86666FZ 36	A55856FZ	38
	A86666FZ	36

50000	500
Part No.	Pg.
AG1006FZ	41
AG1012FZ	41
AG1016FZ-N	41
AG1090FZ	41
AG1091FZ	41
AG1092FZ	41
AG1093FZ	41
AG1099FZ	41
AG1102FZ	40
AG1200FZKIT	40
AG1202FZ	40
AG1402FZ	40
AG1500FZKIT	40
AG1502FZ	40
AG934FZ	41
AL2000FZ	46
AL2025FZ-1	46
AL2025FZ-2	46
AT1475FZ	43
AT8530FZ	44
AT8535FZ	44
CB20100F	11
CB20200F	11
CF10050F	11
DRAIN013	10
EFZ01C	89
EFZ01S	89
EFZ02CP	89
EFZ02SP	89
FDRCF1150030	10
FDRCF1150058	10
FILTER057	10
FILTER107KIT	10

Part No.	Pg.
FILTERKIT011	10
FILTERKIT012	10
FKIT026A	10
FS05V080I1	9
FXS07V080V1	9
FXS07V080V3-208	9
FXS07V080V3-230	9
FXS10V080V1	9
FXS10V080V3-208	9
FXS10V080V3-230	9
FXS10V120V1	9
FXS10V120V3-208	9
FXS10V120V3-230	9
FZ512725	61
FZ512730	61
FZ512735	61
FZ512825	61
FZ512830	61
FZ512835	61
FZ512930	61
FZ512935	61
FZ8120603	63
FZ8140503	62
FZ8160253	62
GC100L	78
GC100L-6X	78
GC100L-6X-12Q	78
GC100XL	78
GC100XL-6X	78
GC100XL-6X-12Q	78
GC160PL	78
GC160PXL	78
GC161PL	79

26 26 2	X X X	31 32 2
Part No.		Pg.
GC161PXL		79
GC180L		83
GC180XL		83
GC181L		83
GC181XL		83
GC220L		80
GC220XL		80
GC221L		82
GC221M		82
GC221S		82
GC240L		80
GC240XL		80
GC241PL		81
GC241PM		81
GC241PXL		81
GC290L		82
GC290M		82
GC300L		77
GC300L-2X		77
GC300M		77
GC300M-2X		77
GC300XL		77
GC300XL-2	Χ	77
GC400PL		84
GC400PM		84
GC400PXL		84
GC500PL		84
GC500PXL		84
GH100L		70
GH100M		70
GH100XL		70
GH100XXL		70
GH200L		75

	Mary Mary	Э.
Part No.	Pg.	
GH200M	75	
GH200XL	75	
GH201L	76	
GH201M	76	
GH201S	76	
GH202L	76	
GH202M	76	
GH202S	76	
GH300L	70	
GH300M	70	
GH300XL	70	
GH330L	71	
GH330M	71	
GH330XL	71	
GH330XXL	71	
GH360L	71	
GH360M	71	
GH360XL	71	
GH360XXL	71	
GH361PL	72	
GH361PM	72	
GH361PXL	72	
GH361PXXL	72	
GH400PL	73	
GH400PM	73	
GH400PXL	73	
GH460PL	73	
GH460PM	73	
GH460PXL	73	
GH500L	74	
GH500XL	74	
GH501L	74	
GH501XL	74	

Part No.	Pg.
GH700PL	69
GH700PM	69
GH700PXL	69
GH700PXXL	69
GL20L	85
GL20M	85
GL20XL	85
GL21L	85
GL21M	85
GL21S	85
GL30L	85
GL30M	85
GL30XL	85
GL31L	85
GL31M	85
GL31S	85
HFZ1202YW3S	15
HFZ1202YW4S	15
HFZ1204YW3S	15
HFZ1204YW4S	15
HFZ1206YW3S	15
HFZ1206YW4S	15
HFZ1208YW3S	15
HFZ12100YW3	13
HFZ12100YW4	13
HFZ12250YW	19, 20
HFZ1225YW3	13
HFZ1250YW3	13
HFZ1250YW4	13
HFZ1405YW2B	15
HFZ14100YW2	13
HFZ14100YW2-3X	13
HFZ14100YW2-D	14

ADEX

1 1 1 1 1 1 1	2. 2. 31. 3
Part No.	Pg.
HFZ14250YW	19, 20
HFZ1425YW2	13
HFZ1425YW2-D	14
HFZ1450YW2	13
HFZ1450YW2-D	14
HFZ3802YW2B	15
HFZ3804YW2B	15
HFZ3806YW2B	15
HFZ38100YW2	13
HFZ38100YW2-D	14
HFZ38250YW	19, 20
HFZ3825YW2	13
HFZ3825YW2-5X	13
HFZ3825YW2-D	14
HFZ3835YW2	13
HFZ3835YW2-D	14
HFZ3850YW2	13
HFZ3850YW2-3X	13
HFZ3850YW2-D	14
HFZ3850YW3	13
HFZBRP1	18,19
HFZBRP3	18,19
HFZC550BRS	49
HFZC550TCS	49
HFZC58250BRS	57
HFZC58250TCS	57
HFZCBRP3	56, 57
HFZCLB11D	15
HFZCLB11D-3X	15
HFZG12050QN	51
HFZG450YW-TV	50
HFZG503YW	50
HFZG503YWS	57

	D I I
Part No.	Pg.
HFZG503YWS	48
HFZG505YW	50
HFZG505YWS	48
HFZG5100YW	50
HFZG5100YW-36T	50
HFZG5100YWS	48
HFZG510YW	50
HFZG510YWS	48
HFZG510YWS	57
HFZG510YWS-6X	48
HFZG525YW	50
HFZG525YWS	48
HFZG550YW	50
HFZG550YW-48T	50
HFZG550YWS	48
HFZG550YWS-30X	48
HFZG550YWS-40X	48
HFZG575YW	50
HFZG575YW-48T	50
HFZG575YWS	48
HFZG6100YW	50
HFZG650YW	50
HFZG675YW	50
HFZGAK01	51
HFZGAK02	51
HFZP14100YW2	21
HFZP14100YW2-D	22
HFZP1425YW2	21
HFZP1425YW2-D	22
HFZP1450YW2	21
HFZP1450YW2-D	22
HFZP3806YW2B	22
HFZP38100YW2	21

Part No.	Pg.
HFZP38100YW2-D	22
HFZP3825YW2	21
HFZP3825YW2-D	22
HFZP3835YW2	21
HFZP3850YW2	21
HFZP3850YW2-D	22
HFZPW3425M	59
HFZPW3425M-4X	59
HFZPW3450M	59
HFZPW3450M-3X	59
HFZPW3525M	59
HFZPW3525M-4X	59
HFZPW3550M	59
HFZPW3550M-3X	59
HFZPW36425M	59
HFZPW36425M-5X	59
HFZPW36450M	59
HFZPW36450M-3X	59
HFZPW40525M	59
HFZPW40525M-5X	59
HFZPW40550M	59
HFZPW40550M-3X	59
HFZPW426050Q	59
HFZPW426050Q-3X	59
HFZPW426100Q	59
HFZPW426100Q-2X	59
HFZW58250YW	19, 20, 57
HFZWHC1	56, 57
HFZWP5100	57
HFZWP550	57
HFZWP575	57
HGH2-FZ	46
HR-05	19, 57

Part No. Pg. HR-20 94 ISOLATORS001 10 L1355FZ 66 L1388LFZ 65 L1388LFZ-B 65 L1388LFZ-C 65 L2950FZ 66 L2910FZSP 67 L2910FZSP 67 L2915FZ 67 L2925FZ 67 L2930FZSP 67 L2950FZ 67 L2950FZSP 67 L2955FZ 67 L2955FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 67 L8011FZ 28 L8011FZ 28 L8041FZ 28 L8041FZ 28 L8250FZ 25 L8250FZ 25 L8300-B 24 L8305FZ 24 L8306FZ 24 L8335FZ 24	Ac 35 A. A. A. S.	3 1 2
ISOLATORS001 10 L1355FZ 66 L1388LFZ 65 L1388LFZ-B 65 L1388LFZ-C 65 L2050FZ 66 L2910FZ 67 L2910FZ 67 L2915FZ 67 L2925FZ 67 L2925FZ 67 L2925FZ 67 L2925FZ 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2955FZ 67 L2955FZ 67 L2955FZ 67 L2955FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 67 L8011FZ 28 L8011FZ 28 L8041FZ 28 L8041FZ 1 32 L8232FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 1 32 L8306FZ 24	Part No.	Pg.
L1355FZ 66 L1388LFZ 65 L1388LFZ-B 65 L1388LFZ-C 65 L2050FZ 66 L2910FZ 67 L2910FZSP 67 L2915FZSP 67 L2925FZ 67 L2925FZ 67 L2930FZSP 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2955FZ 67 L2955FZ 67 L2955FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 67 L8011FZ 28 L8041FZ 28 L8041FZLI 32 L8041FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 25 L8300-B 24 L8300FZ 24 L8305FZ 1 32 L8305FZ 1 32 L8306FZ 24	HR-20	94
L1388LFZ 65 L1388LFZ-B 65 L1388LFZ-C 65 L2050FZ 66 L2910FZ 67 L2910FZP 67 L2915FZ 67 L2915FZ 67 L2925FZ 67 L2925FZ 67 L2925FZ 67 L2930FZSP 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2955FZ 67 L2955FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 67 L8011FZ 28 L8011FZ 28 L8041FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 24 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZ 24	ISOLATORS001	10
L1388LFZ-B 65 L1388LFZ-C 65 L2050FZ 66 L2910FZ 67 L2910FZSP 67 L2915FZ 67 L2915FZ 67 L2925FZ 67 L2925FZ 67 L2925FZ 67 L2930FZSP 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2955FZ 67 L2955FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 67 L8011FZ 28 L8011FZ 28 L8041FZ 32 L8230FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 24 L8300-B 24 L8305FZ 24 L8305FZ 24	L1355FZ	66
L1388LFZ-C 65 L2050FZ 66 L2910FZ 67 L2910FZSP 67 L2915FZ 67 L2915FZ 67 L2925FZ 67 L2925FZ 67 L2925FZP 67 L2930FZSP 67 L2950FZ 67 L2950FZ 67 L2950FZ 67 L2955FZ 67 L2955FZ 67 L2955FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 67 L2965FZ 28 L8011FZ 28 L8011FZ 28 L8041FZ 28 L8041FZ 1 32 L8232FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 1 32 L8305FZ 1 32 L8306FZ 24	L1388LFZ	65
L2050FZ 66 L2910FZSP 67 L2915FZ 67 L2915FZSP 67 L2925FZ 67 L2925FZSP 67 L2930FZSP 67 L2950FZ 67 L2950FZSP 67 L2955FZ 67 L2965FZ 67 L2965FZSP 67 L2965FZSP 67 L8011FZ 28 L8011FZ 28 L8041FZ 28 L8041FZ 28 L8041FZ 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L1388LFZ-B	65
L2910FZ 67 L2915FZ 67 L2915FZSP 67 L2925FZ 67 L2925FZSP 67 L2930FZSP 67 L2950FZ 67 L2950FZSP 67 L2955FZ 67 L2955FZSP 67 L2965FZSP 67 L8011FZ 28 L8011FZ 28 L8041FZ 28 L8041FZ 28 L8041FZ 28 L8041FZ 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L1388LFZ-C	65
L2910FZSP 67 L2915FZ 67 L2915FZSP 67 L2925FZ 67 L2925FZSP 67 L2930FZSP 67 L2950FZ 67 L2950FZSP 67 L2955FZ 67 L2965FZ 67 L2965FZSP 67 L8011FZ 28 L8011FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 24 L8306FZ 24 L8306FZ 24	L2050FZ	66
L2915FZ 67 L2925FZ 67 L2925FZSP 67 L2930FZSP 67 L2950FZ 67 L2950FZSP 67 L2955FZ 67 L2955FZSP 67 L2965FZ 67 L2965FZSP 67 L8011FZ 28 L8011FZLI 32 L8041FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 24 L8306FZ 24	L2910FZ	67
L2915FZSP 67 L2925FZ 67 L2930FZSP 67 L2950FZ 67 L2950FZSP 67 L2955FZ 67 L2955FZSP 67 L2965FZ 67 L2965FZSP 67 L8011FZ 28 L8011FZ 28 L8041FZ 28 L8041FZ 28 L8041FZ 28 L8041FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 24 L8306FZ 24 L8306FZ 24	L2910FZSP	67
L2925FZ 67 L2930FZSP 67 L2950FZ 67 L2950FZSP 67 L2955FZ 67 L2955FZSP 67 L2965FZ 67 L2965FZSP 67 L8011FZ 28 L8011FZLI 32 L8041FZ 28 L8041FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 24 L8306FZ 24 L8306FZ 24	L2915FZ	67
L2925FZSP 67 L2930FZSP 67 L2950FZ 67 L2950FZSP 67 L2955FZ 67 L2965FZ 67 L2965FZSP 67 L8011FZ 28 L8011FZLI 32 L8041FZ 28 L8041FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 24 L8306FZ 24 L8306FZ 24	L2915FZSP	67
L2930FZSP 67 L2950FZ 67 L2950FZSP 67 L2955FZ 67 L2965FZ 67 L2965FZSP 67 L8011FZ 28 L8011FZLI 32 L8041FZ 28 L8041FZ 28 L8041FZ 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L2925FZ	67
L2950FZ 67 L2950FZSP 67 L2955FZ 67 L2965FZ 67 L2965FZSP 67 L8011FZ 28 L8011FZLI 32 L8041FZ 28 L8041FZ 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8305FZ 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L2925FZSP	67
L2950FZSP 67 L2955FZ 67 L2955FZSP 67 L2965FZ 67 L2965FZSP 67 L8011FZ 28 L8011FZLI 32 L8041FZ 28 L8041FZ 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L2930FZSP	67
L2955FZ 67 L2965FZSP 67 L2965FZSP 67 L8011FZ 28 L8011FZLI 32 L8041FZ 28 L8041FZ 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L2950FZ	67
L2955FZSP 67 L2965FZ 67 L2965FZSP 67 L8011FZ 28 L8011FZLI 32 L8041FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L2950FZSP	67
L2965FZ 67 L2965FZSP 67 L8011FZ 28 L8011FZLI 32 L8041FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L2955FZ	67
L2965FZSP 67 L8011FZ 28 L8011FZLI 32 L8041FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8250FZLI 32 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L2955FZSP	67
L8011FZ 28 L8011FZLI 32 L8041FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8250FZLI 32 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZ 24 L8306FZ 24	L2965FZ	67
L8011FZLI 32 L8041FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8250FZLI 32 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZ 24 L8305FZ 24 L8306FZ 24	L2965FZSP	67
L8041FZ 28 L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8250FZLI 32 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZ 24 L8305FZ 24 L8306FZ 24	L8011FZ	28
L8041FZLI 32 L8232FZ 25 L8250FZ 25 L8250FZLI 32 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L8011FZLI	32
L8232FZ 25 L8250FZ 25 L8250FZLI 32 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZ 24 L8306FZ 24	L8041FZ	28
L8250FZ 25 L8250FZLI 32 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L8041FZLI	32
L8250FZLI 32 L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L8232FZ	25
L8300-B 24 L8300-W 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L8250FZ	25
L8300-W 24 L8305FZ 24 L8305FZLI 32 L8306FZ 24	L8250FZLI	32
L8305FZ 24 L8305FZLI 32 L8306FZ 24	L8300-B	24
L8305FZLI 32 L8306FZ 24	L8300-W	24
L8306FZ 24	L8305FZ	24
	L8305FZLI	32
L8335FZ 24	L8306FZ	24
	L8335FZ	24

Part No.	Pg.
L8335FZLI	32
L8340FZ	58
L8550FZ	29
L8560FZ	29
L8603FZ	26
L8611FZ	26
L8611FZLI	32
L8650FZ	30
L8651FZ	31
L8651FZLI	32
L8652FZ	30
L8654FZ	31
L8654FZLI	32
L8711FZ	27
L8741FZ	27
LP1410AFZ	16
LP1415AFZ	16
LP1420AFZ	16
LP1425AFZ	16
MAINKIT008A	10
NFZG01-N	57
NFZG02-N	57
NFZG61	52
NFZG61-8X	52
NFZG62	52
NFZG63	52
NFZG64	52
NFZG64-8X	52
NFZG65-E	53
NFZG66-E	53
NFZG67-E	53
NFZG68-E	53
NFZG69-E	53

Part No.	Pg.
NFZG70-E	53
OILFZ004	10
RP900250	19, 20
RP900250BS	19, 20
RP900250S	20
RP900375	19, 20
RP900375BS	19, 20
RP900375S	20
RP900500	19, 20
RP900500S	19, 20
RP900625F	19, 20, 57
RP900625M	19, 20, 57
RP901250	19, 20
RP901375	19, 20
RP901500	19, 20
SFZG61-E	54
SFZG62-E	54





PREMIUM HOSES, TOOLS & EQUIPMENT



See the full line of Flexzilla® products at:

flexzilla.com



Legacy Manufacturing Company

6509 Partners Ave Marion, IA 52302 phone: 319-373-7305

toll-free: 800-645-8258 email: info@flexzilla.com

legacymfg.com flexzilla.com

See Flexzilla in Action!

















Published: March 1, 2020 Revised: September 24, 2021

Flexzilla is a registered trademark of Weems Industries, Inc.
The color CHARTREUSE is a trademark owned by Weems Industries, Inc., including but not limited to U.S. Reg. Nos. 4,827,169 & 5,293,921. The Flexzilla Stylized X is a trademark of Weems Industries, Inc. SwivelGrip™ Patent Pending ⊚ Legacy Manufacturing Co. Lock-n-Load: U.S. Pat. No. 8,297,476 B2 and Canadian Pat. No. 02743126 ColorConnex: U.S. Pat. No. 7,980,599 & 8,430,431 and Canadian Registration No. 2,575,170

Copyright © 2021 Legacy Manufacturing Co. All Rights Reserved.