


XPP-5422GMX


X-Series Intrinsically Safe Dual-Light™ Flashlight w/ Dual Magnets



MARKET APPLICATIONS	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
DESCRIPTION	This Dual-Light™ Flashlight is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. The XPP-5422GMX uses a CREE® LED rated at 210 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 187 meters. A 130 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provide momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Additionally, the integrated magnets located in the base of the handle and the pocket clip, provide for almost limitless hands-free usage. Power comes from 3 AA premium batteries (not included).
CASE MATERIAL	Engineered Polymer - Green
DIMENSIONS	Length: 7.2 inches (183 mm) • Head Diameter: 1.8 inches (46 mm) • Handle Diameter: 1.1 x 1.5 inches (28 x 38 mm)
WEIGHT	Weight: 6.9 oz. (196 g) with batteries installed
LENS	Unbreakable polycarbonate with scratch resistant coating
LIGHT SOURCE	Flashlight: CREE® LED Impervious to shock with a 50,000 hour lifetime
LIGHT OUTPUT	Flashlight: 210 lumens, Floodlight: 130 lumens, Dual-Light: 285 lumens
ON/OFF	Dual Body Switch - Momentary or Constant-on Flashlight, Constant-on Floodlight
RUN-TIME	Flashlight: 14 hours, Floodlight: 20 hours, Dual-Light: 10 hours
BATTERY	3 Alkaline AA batteries (not included)
FEATURES	<ul style="list-style-type: none"> • cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe Permissible • Flashlight – Floodlight – Dual-Light™ • CREE® LED technology – 50,000 + hours LED life • Momentary or constant-on flashlight • Sharp focused flashlight beam for distance illumination • Unfocused wide-beam floodlight for close-up illumination • Dual-light (flashlight & floodlight at same time) for maximum versatility • Powerful integrated magnets built into the base and pocket clip for multiple hands-free options • Engineered polymer housing w/ Non-slip grip • Dual body switches • Dustproof / Waterproof • Impact & chemical resistant • Built-in pocket/belt clip • Includes removable lanyard • Requires 3 AA batteries

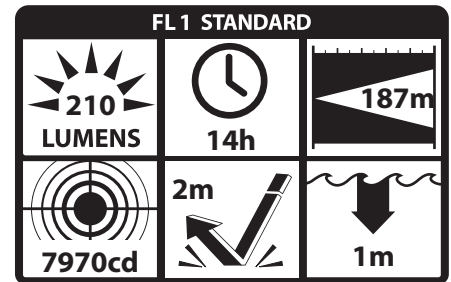

WARRANTY Limited Lifetime Warranty

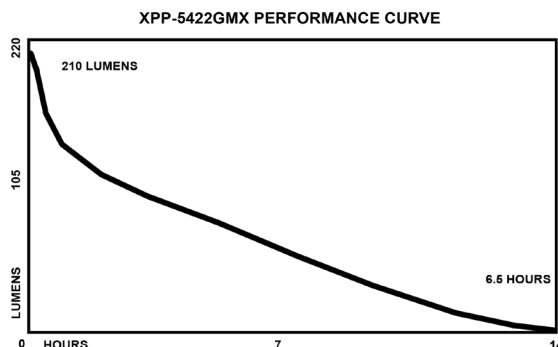APPROVALS



Bayco Products, Inc. XPP-5422GMX	
640 S. Sanden Blvd. Wylie, TX 75098	
 Intertek	 0359
ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	
CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ⓜ I M 1 Ex ia op is I Ma Ⓜ II 1 G Ex ia op is IIC T3 Ga	Ex ia op is I Ma Ex ia op is IIC T3 Ga Intertek ITS 13 ATEX27837X IECEx ITS 16.0067X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline
Conforms to: ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11 ANSI/ISA 60079-26	Certified to: CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25

Designed in USA, manufactured in China at a ISO-9001 certified Bayco facility.

Bayco Products, Inc. • 640 South Sanden Blvd. • Wylie, TX 75098 • 1-800-233-2155 • 1-469-326-9400 • www.nightstick.com

PDS-XPP-5422GMX-18