

## X-Series Intrinsically Safe Flashlight

Flashlight



# 210

Lumens



This Flashlight is cETLus, ATEX, IECEx and INMETRO listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. The XPP-5420GX uses a CREE® LED rated at 210 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 187 meters. The single body switch provides momentary or constant-on functionality. Power comes from 3 AA premium batteries (not included).

**INTRINSICALLY SAFE**



- cETLus, ATEX, IECEx and INMETRO listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present
- Beam distance rated at 187 meters
- Engineered polymer housing

**XPP 5420GX**

# X-Series Intrinsically Safe Flashlight

## FEATURES

- cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Non-slip grip
- Single body switch
- Dustproof / Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Limited Lifetime Warranty



Built in pocket/belt clip




Single body switch



High-efficiency deep parabolic reflector

## SPECIFICATIONS

- Lumens: 210
- Run-time: 14 hrs
- Beam distance: 187 meters
- Candela – 7970
- Water / Dust rating: IP-67
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 7.3oz

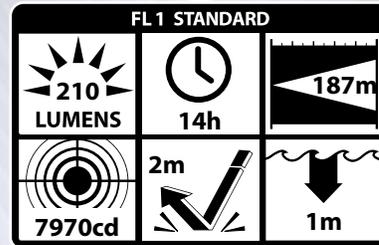

## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

## SAFETY RATING

cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe  
Patent 7,738,229

<b>Bayco Products, Inc. XPP-5420GX</b> 640 S. Sanden Blvd. Wylie, TX 75098	
 ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	 INMETRO INTRINSICALLY SAFE SECURITE INTRINSEQUE
<b>Intertek</b> CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 Ex ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga I M 1 Ex ia op is I Ma I 1 G Ex ia op is IIC T3 Ga	Ex ia op is I Ma Ex ia op is IIC T3 Ga Intertek ITS 13 ATEX27837X IECEx ITS 16.0067X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline
<b>Conforms to:</b> ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11 ANSI/ISA 60079-26	<b>Certified to:</b> CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5420GX	80583 4