

BUSHING SERVICE HEAVY DUTY TOOLS & EQUIPMENT

4263 Suspension Bushing Tool

- Suspension bushing tool used to remove and replace suspension bushings. The hydraulic cylinder and press plate assembly mounts to the suspension component or leaf spring for hands free operation and eliminates the need to hold heavy equipment. Used in conjunction with the bushing adapter sets designed to fit specific bushings and suspension components.
- 15 ton capacity



4263

4261 Hendrickson Front Suspension Bushing Tool

- Suspension bushing tool kit used to remove and replace the leaf spring bushings on Hendrickson Airtek NXT front suspensions found on Freightliner Cascadia vehicles. The hydraulic cylinder and press plate assembly mounts to the leaf spring for hands free operation and eliminates the need to hold heavy equipment. Press plates and bushing adapters are specifically designed to fit the front leaf spring and bushing.
- 15 ton capacity.



4261

4255 Hendrickson Airtek NXT Bushing Adapter Kit

- This adapter kit is used in conjunction with the 4263 Suspension Bushing Tool to remove and replace the leaf spring bushings on Hendrickson Airtek NXT front suspensions found on Freightliner Cascadia vehicles. Plate, adapters and cups make bearing removal and installation faster and easier than other methods.
- Plate, cup and adapters specially designed to fit Airtek NXT front suspension
- Included adapters and cups allow bushing to be pressed out and new bushing to be pressed in
- Adapters aid with installation to help ensure a straight, clean installation of vital suspension bushings



4255



1757 Hendrickson Bar Pin Adapter Set

- Adapter set is used with the beam removed from the truck, and in conjunction with OTC No. 51100 press plate and a 100-ton hydraulic shop press.
- To remove bushings, use OTC's previously introduced No. 302030 removing adapter and No. 206457 press adapter, both of which may be ordered separately. Reinstall bushings following procedures recommended by the suspension manufacturer.

1767 Hendrickson Primaax Quick Alignment Socket

- Hendrickson – Approved tool.
- Used to adjust axle alignment on the Primaax air suspension.
- Works on Primaax models 230, 460, and 690 rear suspensions.



1768 Hendrickson PRIMAAX® Quick Wrench

- Used to torque cross tube end cap bolts and longitudinal torque rod top pad bolts.
- Reduces maintenance time by eliminating the need to remove the tires to gain access to the end cap bolt.
- Use with the following Hendrickson PRIMAAX suspensions:
 - Type A - PAX 230/460/690 and FMX 240/480 with 8-1/2" ride height
 - Type B - PAX 230/460/690 with 10" ride height.



Freightliner

Freightliner Rear Suspension Tool


- Removes and installs single-wrapped FAS II Airliner Freightliner Rear Suspension bushings in a fraction of the time of traditional methods.
- Saves an average 45 minutes per bushing (4 per vehicle) on flat rate of 1.5 hours per bushing.
- 15 ton Capacity cylinder

4244 Freightliner Rear Suspension Tool

4245 Freightliner Rear Suspension Tool includes 2510A Air/Hydraulic Pump.



4244

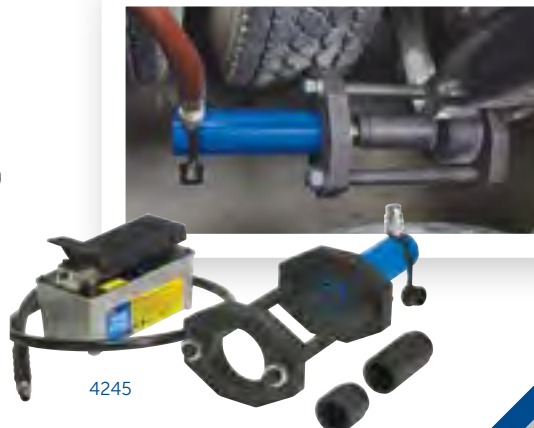

4245