

11794

11795

Replacement Gauges

11780 – Replacement gauge. Blue/Low side - 3-1/4 in. PSI pressure readings and R-1234yf temperature readings in degrees F.

11781 – Replacement gauge. Red/High side - 3-1/4 in. PSI pressure readings and R-1234yf temperature readings in degrees F.

11784 – Replacement gauge. Blue/Low side - 3-1/4 in. PSI pressure readings and R12/R-134a temperature readings in degrees F.

11785 – Replacement gauge. Red/High side - 3-1/4 in. PSI pressure readings and R12/R-134a temperature readings in degrees F.)

11794 – Replacement gauge (replaces 11692). Universal compound replacement gauge, psi/kPa pressure readings, R-22 and R-134a temperature readings in degrees Fahrenheit.

11797 – Replacement gauge.

Universal compound replacement gauge, psi/kPa pressure readings, R-22 and R-134a temperature readings in degrees Celsius.

11795 – Replaces 11693.


Universal pressure replacement gauge, psi/kPa pressure readings, R-22 and R-134a temperature. Temperature readings in degrees Fahrenheit.

11798 – Replacement gauge.

Universal pressure replacement gauge, psi/kPa pressure readings, R-22 and R-134a temperature. Temperature readings in degrees Celsius.

11796 – Replacement gauge lens.

Replacement gauge lens, quarter turn on-off.

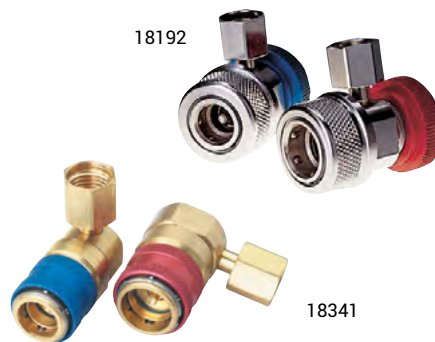

18192

18341



19150

Service Couplers for Automotive R-134a

Field service couplers connect to our special Enviro-Guard hoses to allow access to service ports on automotive R-134a A/C systems. The quick-connect design has an integral safety sleeve, which protects against injury and refrigerant loss if the coupler is disconnected under pressure. The compact design easily fits into tight quarters, which is especially handy for retrofits. Six-ball couplers provide a more stable grip on the fitting than do couplers with four balls.

18190A – Low-side manual coupler, blue actuator.

18191A – High-side manual coupler, red actuator.

18192 – Set of manual service couplers.

18341 – High- and low-side automatic couplers.

19150 – O-ring kit for field service couplers.



18122

18123

R-1234yf Service Couplers

› Integrated safety sleeve, protects against refrigerant loss.


› Compact design.

› Provides a stable grip on the fitting.

18122 – R-1234yf Low side service coupler.

18123 – R-1234yf High side service coupler.

18124 – R-1234yf High- and low-side service coupler set.

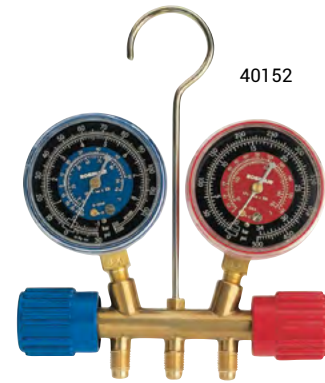

40152

Side-Wheel Manifolds with 1/4" Fittings

Our popular side-wheel manifold is easy to use and designed for accuracy.

Bar – Solid forged brass for long life; handwheels are durable, color-coded Lexan™.

Universal Gauges – Clearly marked so they're easy to read and protected with Lexan™ lenses.

Field-Proven Face Seal Valve – Prevents leakage past the stem.

Models

40152 – Standard side-wheel manifold, color-coded gauges, Fahrenheit scale, brass bar, hand wheels, and hanging hook– no hoses.

40151 – Standard side-wheel manifold, color-coded gauges, Celsius scale, brass bar, hand wheels, and hanging hook– no hoses.

40153 – Standard side-wheel manifold set, includes three 36" standard hoses with 1/4" fittings.

40169 – Standard side wheel manifold set, includes three 60" standard hoses with 1/4" fittings.



18576

18576

Replacement Parts Kit for R-134a Manifold Gauges and Hoses

› 4 manifold stems.

› 6 o-rings, 14 mm.

› 12 valve core depressors.

› 12 hose gaskets, 1/4".

› 12 manifold stem o-rings.

› 6 Quick Seal™ o-rings for R-134a.

› 2 caps with straps, 1/2" Acme.

› O-ring lubricant (high vacuum grease).

› Valve core remover/installer with 6 valve cores.

› 4 color-coded Lexan® handwheels & screws.

› Set of R-134a coupler o-rings, high- and low-side.