

Aerodry® Paint Dryer 130530 Dryer Gun

DESCRIPTION

The waterborne paint dryer reduces paint drying time. The dryer gun amplifies the inlet air flow.

SPECIFICATIONS:

Maximum inlet pressure: 100 PSIG

Typical air flows for dryer gun:


Inlet PSI	Inlet CFM	Outlet CFM
20	5.5	43
30	7.5	52
40	9.5	61
50	11.5	72

INSTALLATION & OPERATION:

1. Attach a clean and filtered air supply to inlet.
2. Use the dryer gun ball valve to adjust air flow.

MAINTENANCE:

1. Keep dryer gun clean.
2. Replace dryer gun filter if dirty.

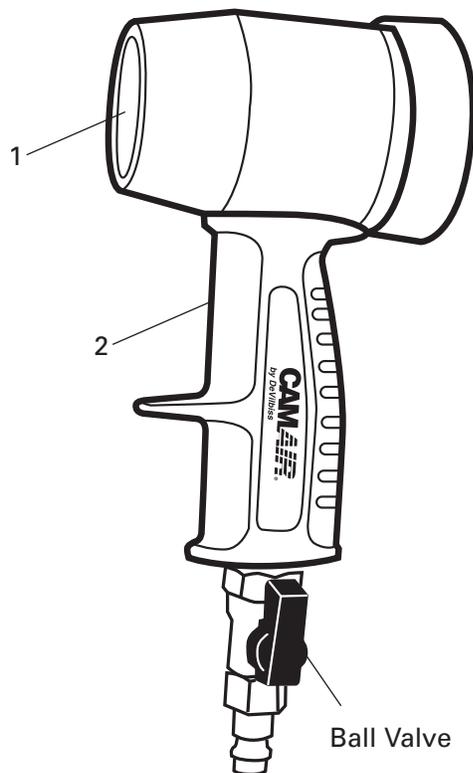

PARTS LIST:

Ref. No.	Order No.	Model No.	Description
1	130531	130531	Filter, 2 Pack
2	130530	130530	Dryer Gun*

*Includes shut-off valve and QD stem.