


130524 QC3 REPLACEMENT CARTRIDGE

CARTRIDGE INCLUDES GASKET, INDICATOR WINDOW & HUMIDITY PAPER


⚠ WARNING

RISK OF INJURY – RELEASE ALL AIR PRESSURE BEFORE SERVICING.


1. Shut-off air.

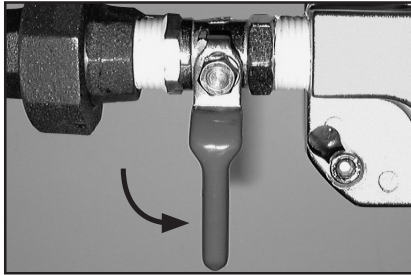


2. Release pressure.

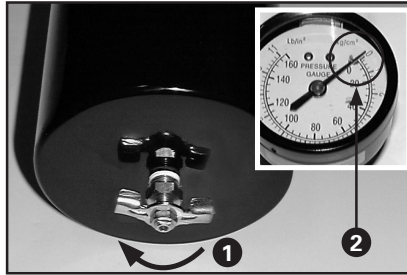


3. Loosen 4 screws (3 turns each).

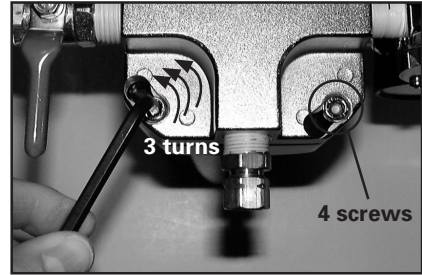


4. Remove bowl.

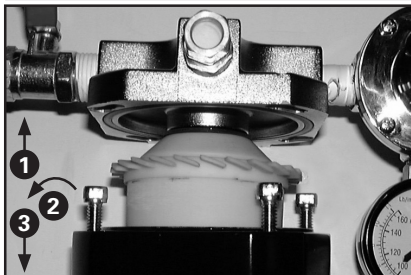


5. Remove cartridge & gasket.

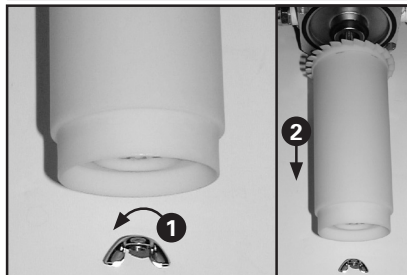


6. Replace indicator – remove nut.

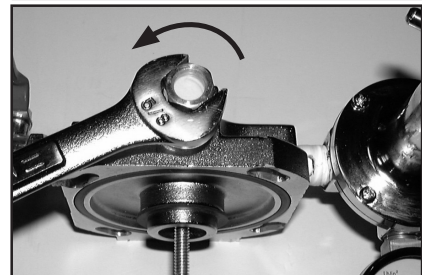

7. Replace indicator...

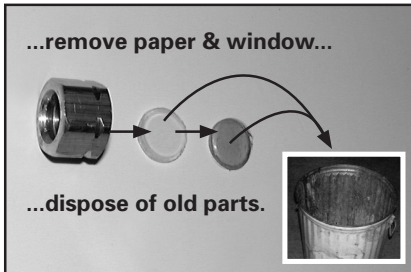


8. Install new window & paper.

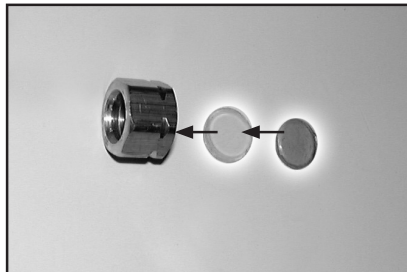


9. Tighten nut gently.




10. Install new cartridge & gasket.

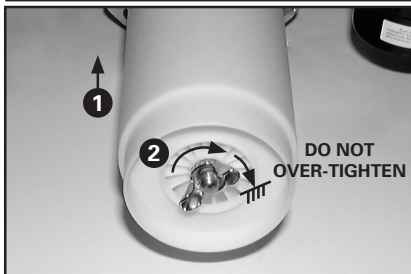

11. Install bowl.

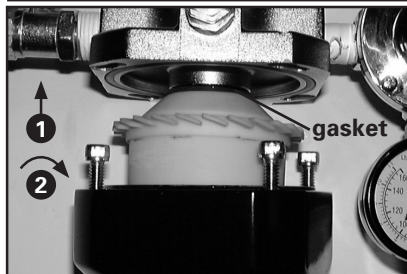

12. Tighten screws tight.

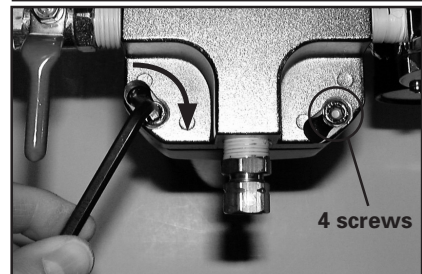

- The Safety Data Sheet SDS-55 is available on request at www.autorefinishindevilbiss.com.
- The used cartridge is non-hazardous and can be disposed of according to local regulations.