


	CP7215	CP7215E	CP7215CV	CP7215SV	CP7215SVE	CP7215CVE
Free speed (rpm)	12000	12000	12000	12000	12000	12000
Power (hp)	0.3	0.3	0.3	0.3	0.3	0.3
Power (W)	210	210	210	210	210	210
Spindle thread	5/16-24	5/16-24	5/16-24	5/16-24	5/16-24	5/16-24
Actual air consumption (l/s)	7.6	7.6	7.6	7.6	7.6	7.6
Actual air consumption (cfm)	16	16	16	16	16	16
Min. hose size (")	3/8	3/8	3/8	3/8	3/8	3/8
Min. hose size (mm)	10	10	10	10	10	10
Weight (lb)	1.74	1.74	1.83	1.84	1.84	1.83
Weight (kg)	0.79	0.79	0.83	0.82	0.82	0.83

	CP7225	CP7225CV	CP7225CVE-3	CP7225CVE	CP7225E	CP7225SV	CP7225SVE
Free speed (rpm)	12000	12000	12000	12000	12000	12000	12000
Power (hp)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
Power (W)	210	210	210	210	210	210	210
Spindle thread	5/16-24	5/16-24	5/16-24	5/16-24	5/16-24	5/16-24	5/16-24
Actual air consumption (l/s)	7.6	7.6	7.8	7.6	7.6	7.6	7.6
Actual air consumption (cfm)	16	16	16.5	16	16	16	16
Min. hose size (")	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Min. hose size (mm)	10	10	10	10	10	10	10
Weight (lb)	1.74	1.83	1.45	1.83	1.74	1.84	1.84
Weight (kg)	0.79	0.83	0.66	0.83	0.79	0.82	0.82

	CP7255	CP7255E	CP7255SV	CP7255SVE	CP7255CVE-3	CP7255CVE
Free speed (rpm)	12000	12000	12000	12000	12000	12000
Power (W)	210	210	210	210	210	210
Power (hp)	0.3	0.3	0.3	0.3	0.3	0.3
Spindle thread	5/16-24	5/16-24	5/16-24	5/16-24	5/16-24	5/16-24
Min. hose size (mm)	10	10	10	10	10	10
Min. hose size (")	3/8	3/8	3/8	3/8	3/8	3/8
Actual air consumption (l/s)	7.6	7.6	7.6	7.6	7.8	7.6
Actual air consumption (cfm)	16	16	16	16	16.5	16
Weight (kg)	0.79	0.79	0.82	0.82	0.66	0.83
Weight (lb)	1.74	1.74	1.84	1.84	1.45	1.83

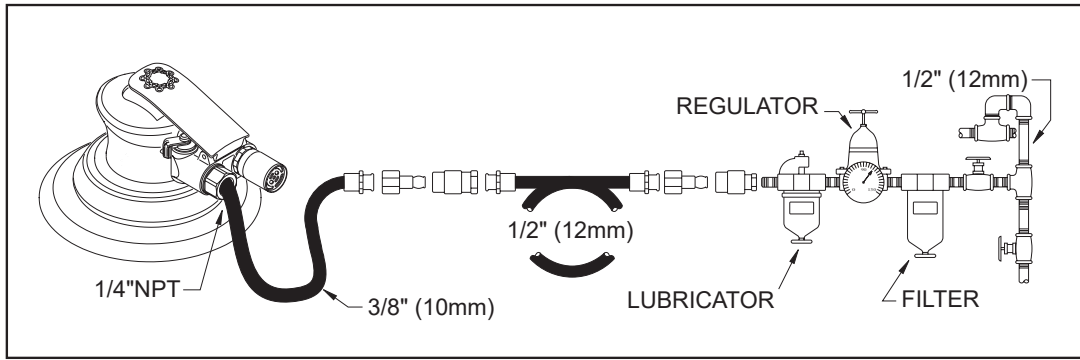

Technical data

	Free speed (rpm)	Weight (kg)	Weight (lb)
CP7215	12000	0.79	1.74
CP7215E	12000	0.79	1.74
CP7215CV	12000	0.83	1.83
CP7215CVE	12000	0.83	1.83
CP7215SV	12000	0.82	1.84
CP7215SVE	12000	0.82	1.84
CP7225	12000	0.79	1.74
CP7225E	12000	0.79	1.74
CP7225CV	12000	0.83	1.83
CP7225CVE	12000	0.83	1.83
CP7225SV	12000	0.82	1.84
CP7225SVE	12000	0.82	1.84
CP7255	12000	0.79	1.74
CP7255E	12000	0.79	1.74
CP7255CV	12000	0.83	1.83
CP7255CVE	12000	0.83	1.83
CP7255SV	12000	0.82	1.84
CP7255SVE	12000	0.82	1.84

Noise and vibration

	Sound pressure level (dB(A))	Vibration (m/s ²)	Vibration uncertainty
CP7215	81	8.54	2.85
CP7215E	81	5.65	1.83
CP7215CV	81	8.54	2.85
CP7215CVE	81	5.65	1.83
CP7215SV	81	8.54	2.85
CP7215SVE	81	5.65	1.83
CP7225	81	7.65	3.18
CP7225E	81	3.7	2.08
CP7225CV	81	7.65	3.18
CP7225CVE	81	3.7	2.08
CP7225SV	81	7.65	3.18
CP7225SVE	81	3.7	2.08
CP7255	81	8.22	2.26
CP7255E	81	5.13	1.79
CP7255CV	81	8.22	2.26
CP7255CVE	81	5.13	1.79
CP7255SV	81	8.22	2.26
CP7255SVE	81	5.13	1.79

Uncertainty 3 dB(A), in accordance with EN ISO 15744. For Sound power level, add 11 dB(A)

Vibration standard : ISO-28927-3

These declared values were obtained by laboratory type testing in accordance with the stated standards and are suitable for comparison with the declared values of other tools tested in accordance with the same standards. These declared values are not adequate for use in risk assessments and values measured in individual work places may be higher. The actual exposure values and risk of harm experienced by an individual user are unique and depend upon the way the user works, the workpiece and the workstation design, as well upon the exposure time and the physical condition of the user.

We, **CHICAGO PNEUMATIC Tool Co. LLC**, cannot be held liable for the consequences of using the declared values, instead of values reflecting the actual exposure, in an individual risk assessment in a work place situation over which we have no control.

This tool may cause hand-arm vibration syndrome if its use is not adequately managed. An EU guide to managing hand-arm vibration can be found by accessing <http://www.pneurop.eu/index.php> and selecting 'Tools' then 'Legislation'.

We recommend a programme of health surveillance to detect early symptoms which may relate to noise or vibration exposure, so that management procedures can be modified to help prevent future impairment.

- ⓘ If this equipment is intended for fixtured applications:
The noise emission is given as a guide to the machine-builder. Noise and vibration emission data for the complete machine should be given in the instruction manual for the machine.

Declarations

EU DECLARATION OF CONFORMITY

We, **CHICAGO PNEUMATIC Tool Co. LLC**, 1815 Clubhouse Road, Rock Hill, SC 29730, declare under our sole responsibility that the product (with name, type and serial number, see front page) is in conformity with the following Directive(s):
2006/42/EC (17/05/2006)

Harmonized standards applied:
EN ISO 11148-8 : 2012

Authorities can request relevant technical information from:
Pascal Roussy, R&D Manager, Ets Georges Renault, 38 rue Bobby Sands, BP10273 44818 Saint Herblain, France

Saint-Herblain,

Pascal ROUSSY

Signature of issuer



Statement of use

This product is designed for removing or polishing material using coated abrasives or polishing attachments. No other use permitted. For professional use only.

Lubrication

Use an air line lubricator with SAE #10 oil, adjusted to two (2) drops per minute.

Maintenance instructions

- Follow local country environmental regulations for safe handling and disposal of all components.
- Maintenance and repair work must be carried out by qualified personnel using only original spare parts. Contact the manufacturer or your nearest authorised dealer for advice on technical service or if you require spare parts.
- Always ensure that the machine is disconnected from energy source to avoid accidental operation.
- Disassemble and inspect the tool every three 3 months if the tool is used every day. Replace damaged or worn parts.
- To keep downtime to a minimum, the following service kit is recommended : **Tune-up kit**

Disposal

- The disposal of this equipment must follow the legislation of the respective country.
- All damaged, badly worn or improperly functioning devices **MUST BE TAKEN OUT OF OPERATION**.
- The disposal of this equipment must follow the legislation of the respective country.
- Repair only by technical maintenance staff.

Useful information

Website

Log in to Chicago Pneumatic: www.cp.com.

You can find information concerning our products, accessories, spare parts and published matters on our website.

Country of origin

Taiwan

Copyright

© Copyright 2018, CHICAGO PNEUMATIC Tool Co. LLC, 1815 Clubhouse Road, Rock Hill, SC 29730

All rights reserved. Any unauthorized use or copying of the contents or part thereof is prohibited. This applies in particular to trademarks, model denominations, part numbers and drawings. Use only authorized parts. Any damage or malfunction caused by the use of unauthorised parts is not covered by Warranty or Product Liability.

Caractéristiques techniques

	Vitesse à vide (tr/min)	Poids (kg)	Poids (lb)
CP7215	12000	0.79	1.74
CP7215E	12000	0.79	1.74
CP7215CV	12000	0.83	1.83
CP7215CVE	12000	0.83	1.83
CP7215SV	12000	0.82	1.84
CP7215SVE	12000	0.82	1.84
CP7225	12000	0.79	1.74
CP7225E	12000	0.79	1.74
CP7225CV	12000	0.83	1.83
CP7225CVE	12000	0.83	1.83
CP7225SV	12000	0.82	1.84
CP7225SVE	12000	0.82	1.84
CP7255	12000	0.79	1.74
CP7255E	12000	0.79	1.74
CP7255CV	12000	0.83	1.83
CP7255CVE	12000	0.83	1.83
CP7255SV	12000	0.82	1.84
CP7255SVE	12000	0.82	1.84

Déclarations

DECLARATION DE CONFORMITÉ UE

Nous, CHICAGO PNEUMATIC Tool Co. LLC, 1815 Clubhouse Road, Rock Hill, SC 29730, déclarons sous notre seule et entière responsabilité que le produit (dont le nom, le type et le numéro de série figurent en première page) est en conformité avec la ou les directives suivantes :

2006/42/EC (17/05/2006)

Normes harmonisées appliquées :
EN ISO 11148-8 : 2012


Les autorités peuvent obtenir les informations techniques pertinentes en s'adressant à :

Pascal Roussy, R&D Manager, Ets Georges Renault, 38 rue Bobby Sands, BP10273 44818 Saint Herblain, France

Saint-Herblain,

Pascal ROUSSY

Signature du déclarant



Utilisation prévue

Ce produit est conçu pour l'enlèvement de matière et le polissage à l'aide d'abrasifs appliqués ou d'accessoires de polissage. Aucune autre utilisation n'est autorisée. Pour utilisation professionnelle uniquement.