

P- 628 PROFESSIONAL GRADE, COATED GAFFER'S TAPE

TYPICAL APPLICATIONS

- For general use in the convention, hospitality, exhibition and trade show industries, as well as for bundling wires, taping down cords, lighting and props, and masking silk screen frames in the audio/visual, television, photography, theatrical and motion picture industries
- Can also be used for protection and book-binding, color-coding, labeling and stage marking

PRODUCT FEATURES

- Professional grade gaffer's tape
- High tack, tensile strength and holding power
- Writable surface
- Durable and conformable
- Hand-tearable in machine and cross directions
- Great for temporary indoor floor marking and removes cleanly from most surfaces for up to 3 weeks. Not recommended for hardwood floors or in direct sunlight.

CONSTRUCTION

Backing: Matte-finish coated cloth

Adhesive: Synthetic rubber adhesive

STANDARD WIDTHS

1.88 in; 2.83 in

48 mm; 72 mm

STANDARD LENGTH

54.6 yd

50 m

Lead times may apply. Please contact Shurtape customer service for information related to stock and non-stock sizes and colors.

STANDARD CORE SIZE

3 in


APPLICABLE STANDARDS

NA

STORAGE & USAGE CONDITIONS

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.

COLORS

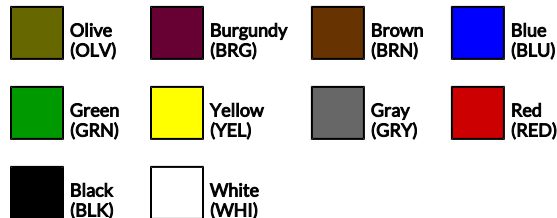

PHYSICAL PROPERTIES

	STANDARD	METRIC
Adhesion to Stainless Steel	75 oz/in width	8.21 N/10 mm
Elongation	4%	4%
Service Temperature Range	50 F to 180 F	10 C to 82 C
Tensile	50 lbs/in width	87.6 N/10 mm
Thickness	10.75 mils	0.27 mm

Physical and performance characteristics shown above are obtained from tests recommended by PSTC, ASTM, government agencies or Shurtape Technologies, LLC, Quality Assurance and Technical Service departments and do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

