

DAD-PRO™
DESICCANT AIR DRYING SYSTEM



**Worry free air
filtration for
top-quality paint
jobs**


- First stage filter removes oil, water and dirt down to 5 microns.
- Second stage coalescer removes oil vapors and dirt particles down to .01 microns.
- Desiccant tank removes water vapor and humidity down to a dew point of -40° F.
- Bagged desiccant and automatic drains for ease of maintenance.

Order No.	Description
130546	DAD-PRO Desiccant Air Drying System
130504	Replacement Desiccant Cartridge
130536	50 scfm 2-stage Filter Assy with Regulator
130538	Replacement Water Separator Element
130539	Replacement Oil Coalescing Element
130544	Filter Mounting Bracket
130545	Float Drain Kit



**Replaceable
Desiccant
Cartridge for Easy
Maintenance**

Refer to Service Bulletin: SB-6-234

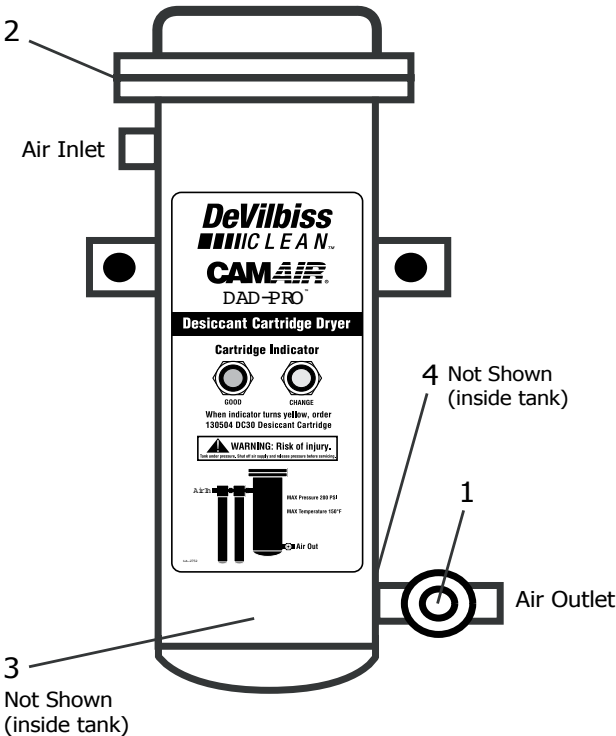

Ref No.	Replacement Part No.	Description	Individual Parts Req.
1	130505	Humidity Indicator (1 Humidity Indicator Paper Included)	1
2	130510	Gasket	1
3	130504	Desiccant Cartridge (Not Shown)	1
4		Tank Grommet (Included with 130504)	1

CT Plus™ 5-STAGE FILTER SYSTEM

CAMAIR
by DeVilbiss

Complete compressed air treatment and drying center

Worry free air filtration for top quality paint jobs

- First stage filter removes oil, water and dirt down to 40 micron
- Second stage coalescer removes oil vapors and dirt particles down to .01 micron
- CT30 desiccant tank repeats dirt and oil aerosol removal and removes humidity



Order No. Description

130522	CT Plus 5-stage desiccant filter system
130517	Filter element, water (1st stage)
130518	Filter element, coalescing (2nd stage)
130504	DC30 desiccant cartridge


30 CFM air flow capacity

- Longer desiccant life
- Air inlet valve shuts off CT Plus™ air without having to shut off shop air
- No tools needed to change first and second stage filters
- Easy change-out desiccant cartridge bag

Ergonomic, self-relieving regulator



Refer to Service Bulletins and Instructions: SB-6-182, SI-6-18-8, SI-6-18-10

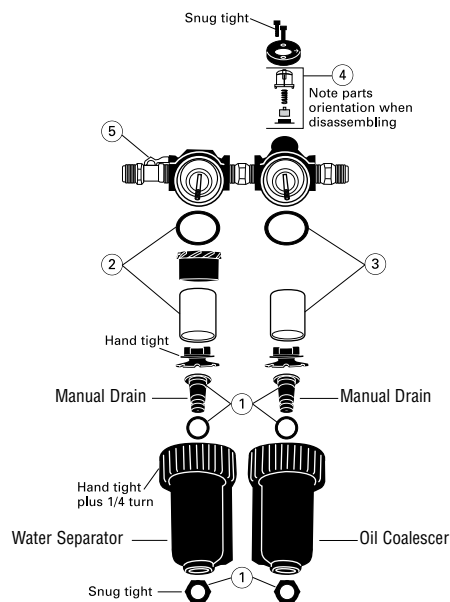


2-Stage Filter Set Parts

Ref. No.	Part No.	Description	Ind. Parts Req.
1	130519	Drain Kit (1 set)	1
2	130517	Filter Element, Water	1
3	130518	Filter Element, Coalescing	1
4	130520	Indicator Kit, Coalescing	1
5	VA-595	Shut-off Valve	1

2-STAGE FILTER SPECIFICATIONS

Air Flow	65 SCFM @ 90 PSIG
Max. Pressure	150 PSIG
Max. Temperature	150°F

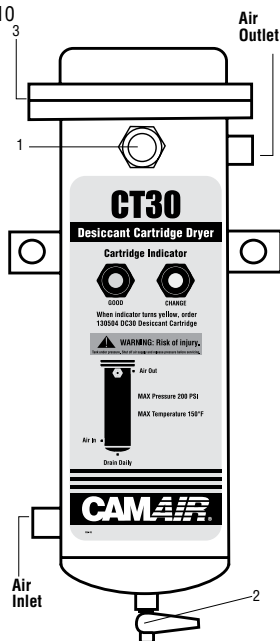


CT30 Parts

Ref. No.	Order No.	Description	Ind. Parts Req.
1	130505	Humidity Indicator (1 Humidity Indicator Paper included)	1
2	130511	Drain (Manual)	1
3	130510	Gasket	1
*4	130504	Desiccant Cartridge (not shown)	1

* Material Safety Data Sheet (MSDS-52) available upon request.

CT30 SPECIFICATIONS

Air Inlet	1/2" NPT (Female)
Air Outlet	1/2" NPT (Female)
Air Flow Capacity	30 CFM
Max. Operating Pressure	200 PSIG (14 Bar)
Max. Temperature	150°F (65.6°C)
Humidity Indicator	Green: OK Yellow: Replace Desiccant
Water Vapor Removal	-40°F Dew point
Particulate Removal	0.1 micron
Manual Drain	Included

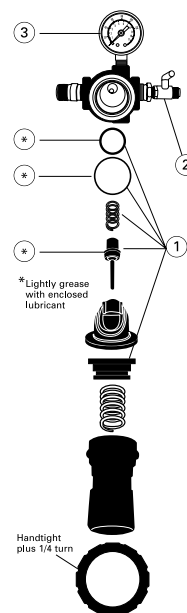

Regulator Parts

Ref. No.	Part No.	Description	Ind. Parts Req.
1	130521	Regulator Kit	1
2	VA-594	Shut-off Valve	1
3	GA-288	Gauge	1

REGULATOR SPECIFICATIONS

Air Flow	65 SCFM @ 100 PSIG
Max. Inlet Pressure	250 PSIG
Regulated Pressure Range	2-125 PSIG
Max. Temperature	175°F

CT30 & CT30P DESICCANT CARTRIDGE DRYERS

CAMAIR
by DeVilbiss

Easy Change Desiccant Air Dryer


- CT series desiccant air dryers remove water vapor from the compressed air down to a dew point of -40° F
- Quick change 10 lb. desiccant cartridge bag is made of a special fiber media which removes oil aerosols and solid particles down to 0.1 micron meaning no need for coalescing or final filters
- Install at point of use
- 30 CFM air flow capacity

Order No.	Description
130500	Desiccant Air Dryer wall mount
130501	Desiccant Air Dryer portable with stand
130504	Desiccant Cartridge

Completely portable - Allows placement at point of use



Refer to Service Bulletin: SB-6-182

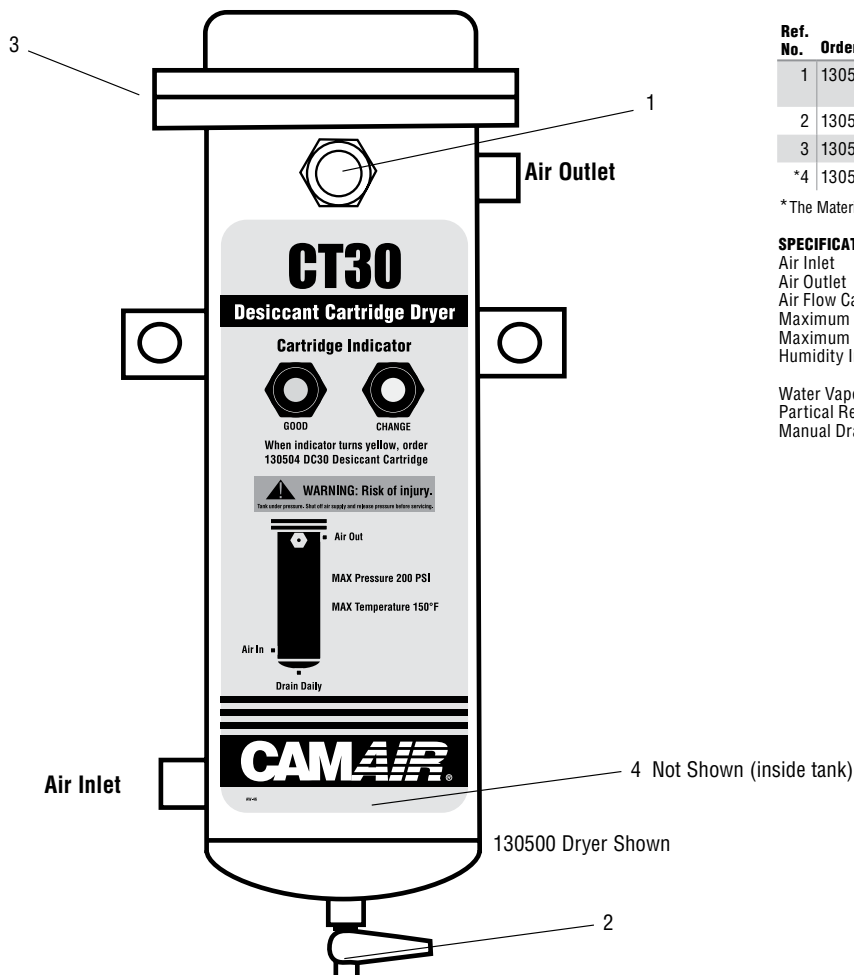

Ref. No.	Order No.	Description	Ind. Parts Req.
1	130505	Humidity Indicator (1 Humidity Indicator Paper included)	1
2	130511	Drain (Manual)	1
3	130510	Gasket	1
*4	130504	Desiccant Cartridge (not shown)	1

*The Material Safety Data Sheet (MSDS-52) is available upon request.

SPECIFICATIONS

Air Inlet	½" NPT (Female)
Air Outlet	½" NPT (Female)
Air Flow Capacity	30 CFM
Maximum Operating Pressure	200 PSIG (14 Bar)
Maximum Temperature	150°F (65.6°C)
Humidity Indicator	Green: OK Yellow: Replace Desiccant
Water Vapor Removal	-40°F Dew point
Particulate Removal	0.1 micron
Manual Drain	Included