


DynaLocke® Dual Action Sander


Unique Disc Sander and Random Orbital Sander in one!

- Fast and Powerful
- Versatile
- Lightweight
- Soft grip housing insulates operator's hand from cold.
- Adjustable speed control; rear exhaust.
- All models include our best urethane hook-face sanding pad with common 5/16"-24 male thread.


Disc Sander OR 3/16" Random Orbital



ROTARY ORBIT Strip, level and grind to bare metal!



3/16" ORBIT Featheredge and finesse body panels!

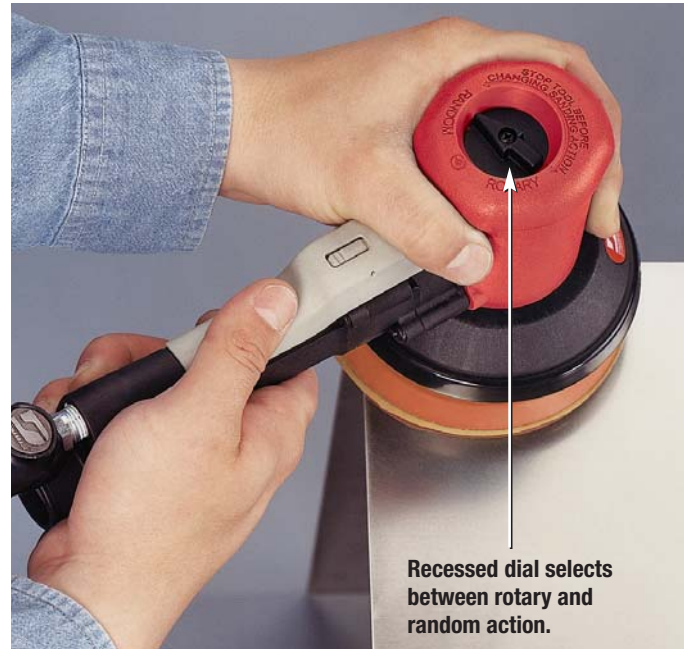

Recessed dial selects between rotary and random action.

Amazing! Two Tools In One!
Performs Like No Other Sander!

Non-Vacuum

Model 10770

3" Diameter

- Includes 56087 Pad.

Model 10780

3-1/2" Diameter

- Includes 54313 Pad.

Model 10750

5" Diameter

- Includes 54325 Pad.

Model 10754

6" Diameter

- Includes 54327 Pad.

Self-Generated Vacuum

- For connection to shop vac or central vacuum systems.
- Designed to vacuum in random orbital mode only.

Model 10771

3" Diameter

- Includes 56087 Pad.

Model 10781

3-1/2" Diameter

- Includes 54313 Pad.

Model 10752

5" Diameter

- Includes 54326 Pad.

Model 10756

6" Diameter

- Includes 54328 Pad.



**USES STANDARD
RANDOM ORBITAL
SANDING PADS!**
HOOK-FACE PAD INCLUDED.
SEE PAGE 55.



Self-Generated Vacuum
Model 10756

1-1/4" Dia.
Vac Port

50617 Dust Collection System available.
See page 53.

Model Description	Motor hp	Motor RPM	Air Flow Rate CFM/SCFM	Air Inlet Thread	Hose Size	Air Pressure PSIG	Weight Pound	Length Inch	Height Inch
3" Models	.45	12,000	3/23	1/4" NPT	1/4"	90	2.35	10-5/16	5-3/8
3-1/2" Models	.45	12,000	3/23	1/4" NPT	1/4"	90	2.35	10-5/16	5-3/8
5" Models	.45	12,000	3/23	1/4" NPT	1/4"	90	2.6	11-1/16	5-1/8
6" Models	.45	12,000	3/23	1/4" NPT	1/4"	90	2.7	11-1/2	5-1/8

Sanding Pads For All Random Orbital Sanders / DynaLocke®

- All pads: 5/16"-24 male thread. • 13,000 RPM maximum rated. • Fit most brands of orbital sanders. • Perfectly balanced for use with Spirit sanders!

Good
Rubber Pad



Better
Urethane Value Line



PSA Only

Best (Standard on Tools)
Premium Urethane



PSA and Hook-Face

Best (Channel-Vac Pads)
Premium Urethane

- Circular recessed channel is 1/8" deep into the pad face connecting the pad's vacuum holes.
- Eliminates need to align the pre-punched holes in the abrasive with the holes in the pad.
- Great for production situations.



3/8" Thick, Low Profile

PSA

Pad Construction	Density	5" Diameter		6" Diameter	
		Non-Vacuum	Vacuum	Non-Vacuum	Vacuum
Rubber	Medium	50630	50631	50632	50633
Rubber Post Pattern	Medium	—	50695	—	50696
Value Urethane	Medium	56205	56207	56206	56208
Premium Urethane	Soft	56102	56100	56103	56101
Premium Urethane	Medium	56106	56104	56107	56105
Premium Urethane Channel-Vac	Soft	—	56251	—	56261
Premium Urethane Channel-Vac	Medium	—	56252	—	56262

Hook-Face, Short Nap

Premium Urethane	Soft	56157	56155	56158	56156
Premium Urethane	Medium	54325	54326	54327	54328
Premium Urethane Channel-Vac	Soft	—	56253	—	56263
Premium Urethane Channel-Vac	Medium	—	56250	—	56260

Hook-Face, Long Nap (For Non-Woven Nylon)

Rubber	Medium	50605	50607	50606	50610
--------	--------	-------	-------	-------	-------

5/8" Thick, All Premium Urethane

- A thicker pad conforms more easily to curved and contoured surfaces and makes it ideal for featheredging.

PSA

Density	3" Diameter Dual Purpose	3-1/2" Diameter Dual Purpose	5" Diameter		6" Diameter	
			Non-Vacuum	Vacuum	Non-Vacuum	Vacuum
Soft	56086	56097	56185	56186	56187	56188
Medium	56084	56098	56175	56176	56177	56178
Channel-Vac Soft	—	—	—	56256	—	56266
Channel-Vac Medium	—	—	—	56254	—	56264

Hook-Face, Short Nap

Soft	—	54311	56195	56196	56197	56198
Medium	56087	54313	56180	56181	56182	56183
Channel-Vac Soft	—	—	—	56257	—	56267
Channel-Vac Medium	—	—	—	56255	—	56265

Hook-Face, Long Nap (For Non-Woven Nylon)

Medium	56090	54314	—	—	—	—
--------	-------	-------	---	---	---	---