

Dynaline 8" Board Sander

- Ultra-smooth in-line sanding action.
- Tool's precision gear-set provides unstoppable sanding power with control.
- 2,400 strokes per minute; 3/8" long sanding stroke is very consistent.
- Ideal for areas where a conventional long board sander is too big.
- Adjustable speed control. Rear exhaust.
- Not a "jitterbug" type sander.
- Piston driven sanders don't even come close to this tool's performance.
- For abrasives, see page 57.
- Contoured specialty Pads available on page 49.



Non-Vacuum

Model 10400

- Includes 57454 PSA Pad for 2-3/4" wide x 8" abrasive paper.
- 3-2/3" x 7" and 2-3/4" x 11" pads are also available.
- Reattachable abrasive sheets may be mounted with optional "short-nap" hook-face pad.



Central Vacuum-Ready

Model 10404

- Includes 57455 PSA Sanding Pad. Ready to connect to your central vacuum system or shop vac.
- Mount 2-3/4" x 8" vacuum paper (6-hole).
- Optional 57474 Punch Plate for 2-3/4" x 8" pad and 57476 Punch Plate for 3-2/3" x 7" pad are available to convert to vacuum paper.



Optional Punch Plate



Loop Face Pad

Part No. 56324

- Compatible with 3M Hookit™ II abrasives



Model Number	Motor hp	Stroke Inch	Strokes per Minute	Sound Level	Air Flow Rate CFM/SCFM	Air Inlet Thread	Hose Size	Air Pressure PSIG	Weight Pound	Length Inch	Height Inch
All Models	.25	3/8	2,400	85 dB(A)	3/18	1/4" NPT	1/4"	90	2.6	7	3-3/4

Accessories

DynaZip Accessories *(Also Fit Competitive Tools)*

Wire Wheels


Part No.	Size	Grade	Use	Tip Type
92245	4" dia. x 3/4" wide	Coarse	Sealants	Bent
92246	4" dia. x 3/4" wide	Medium	Rust	Bent



Eraser Decal Removal Wheel

92255 Eraser Wheel Only

92257 Eraser Wheel with Hub

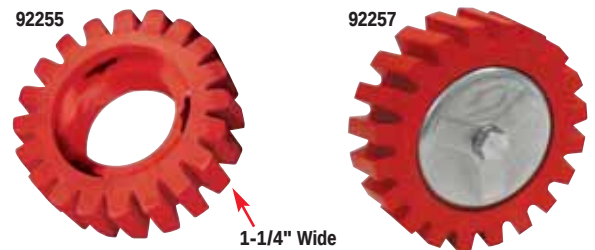

Wheel Hub Assembly

92284

- Mounts the 3/4" wide wire wheels; also mounts the 92255 Eraser Decal Removal Wheel.



Threaded Adapters


Part Number	Mounts to	Exposed	Shank Dia.	Length (Inch)
50103	1/4" Collet	1/4"-20 Male Thread	1/4"	1-1/4
51032	1/4" Collet	1/4"-20 Female Thread	1/4"	1-1/2
50106	3/8"-24 Male Thread	1/4"-20 Male Thread	—	1-1/16
54021	1/4"-28 Female Thread	1/4"-20 Male Thread	—	1-3/16
54040	5/8"-11 Male Thread	5/16"-24 Female Thread	—	1-5/8
55034	3/8"-24 Male Thread	5/8"-11 Male Thread	—	1-3/8



Mini-Dynorbital® Sanding Pads

- For PSA discs only.
- Abrasives on page 54.

Part Number	Pad Dia.	Description Face	Thread Type
54017	3/4"	Medium/Rubber	1/4"-20 Female
54018	1-1/4"	Medium/Rubber	1/4"-20 Female
54031	1-1/4"	Soft	Locking-Type
54085	3/4"	Very Soft	1/4"-20 Female
54086	1-1/4"	Very Soft	1/4"-20 Female
54087	3/4"	Soft/Vinyl	1/4"-20 Female
54088	1-1/4"	Soft/Vinyl	1/4"-20 Female



Downdraft Sanding Tables

- Keep shop area free of dust while sanding, grinding, etc.
- Great for sanding:
 - Fiberglass spoilers and wings
 - Doors and quarter panels
 - Motorcycle frames, fenders and gas tanks
 - Custom car, truck and van parts, etc.
 - Fiberglass parts
 - Bumper covers
- Easy to use, safe, unlike flimsy fender stands.
- No vacuum-type tools needed; use any sander/grinder.
- Keep machine on even when not in use – table actually filters air to help clean the shop environment.



Standard Duty Models

64201

- 33" W x 41" L working area.

64699

- 33" W x 60" L working area.

64700

- 36" W x 72" L working area.

- Dual filtration – includes three 20" wide x 25" long x 2" thick, 1-micron pleated filters, and one 5-micron pre-filter blanket.
- Includes 5" diameter casters and two dust-tight electric outlets.
- Rhino Linings® coated tabletop is durable and anti-slip.
- Two handy storage compartments for tools and accessories.

Specifications

- **Power Source:** One heavy duty electric motor, 1.0 Hp
- **Electric Capacity:** 110 volt, 220 volt (single phase).
Three phase available upon request.
- **Two Paper Filter Sizes Available:**
64671: 20" wide x 25" long x 2" thick standard paper air filter
64672: 20" wide x 25" long x 2" thick UL rated class I non-flammable air filter (recommended when sanding bare metal).



Heavy Duty Model

64657

- 48" wide x 96" long working area. Includes six 20" x 25" paper filters (64658) and four 16" x 25" paper filters (64659).
- Dual filtration – 5-micron pre-filter blanket and 1-micron paper filters.
- High quality reverse incline blowers. Heavy duty TEFC twin electric motors. Non-slip surface for easier tool maneuverability.
- Up to 70% more filter area than competitive brands.
- Base unit is all-metal construction with CNC milled 3/4" MDF tabletop.
- Optional anti-static and anti-slip mat available (P/N 64970) as well as optional 5" diameter casters.

Specifications

- **Power Source:** Two heavy duty TEFC electric motors, 1.5 Hp
- **Electric Capacity:** 115 volt (single phase), 208 volt (three phase), 230 volt (single phase), 230 volt (three phase), 460 volt (three phase) available upon request.
- **Sound Level:** 72 dB(A)
- **Shipping Weight:** 820 lbs.



Model Number	Motor Hp	Volts	Phase	Vacuum Suction	Sound Level	Working Area Width	Working Area Length	Height Inch	Shipping Weight
64201	1	110/220	1	3,000 CFM	72 dB(A)	33"	41"	36	275 lbs.
64657	1.5 (dual)	115	1	7,000 CFM	75 dB(A)	48"	96"	36	970 lbs.
64699	1	110/220	1	3,000 CFM	72 dB(A)	33"	60"	36	285 lbs.
64700	1	110/220	1	3,000 CFM	72 dB(A)	36"	72"	36	365 lbs.

Electric Portable Dry Vacuums

- For use with air tools – setup for two-tool operation.
- A cost-effective solution versus overhead central-vac systems.
- Quiet operation – only 76 dB(A).

Model 61300
9.9 Gallon

Model 61301
17 Gallon

Variable Vacuum Control

Adjust your vacuum flow, based on type of tool and work surface.

Automatic ON/OFF

Vacuum starts and stops with use of tool. Saves time and conserves energy!

H.E.P.A. Filtration

Retains 99.97% of ultra-fine particles (High Efficiency Particulate Air), as small as 0.3 microns in diameter.

Extra Thermal Protection Device

Additional safeguard against overload of electronic motor.

Two-Tool Setup

Connect and operate two tools simultaneously!
Allows more efficient use of workshop space.

Electronic Thermal Protection Device

Prevents motor overload.

Heavy Duty Four-Wheel Trolley

The ultimate in portability! Vacuum unit effortlessly glides from one workstation to another.

"Tilt 'n Clean" Stainless Steel Drum

Easily tilts backward for quick emptying. Requires no heavy lifting or tiresome bending! 9.9 or 17 gallon capacity.

Two 20-Foot Hoses

are included. Ultra-flexible and lightweight air and exhaust hose.

TWO YEAR Limited Warranty!

We back our quality with twice the coverage of competitive models.



Each unit includes everything shown.

Model Number	Capacity Gallon	Voltage / Frequency	Watts/hp	Air Pressure PSIG	Water Static Lift Inch	Shipping Weight lbs.	Height Inch	Width Inch
61300	9.9	120V/60 Hz	1,300/1.75	90	90	48.4	38-1/2	20-7/8
61301	17	120V/60 Hz	1,300/1.75	90	90	61.6	44-7/8	27-5/8

17 Gallon Vacuum Combo Kit

- Included with each kit is two Dynorbital-Spirit® Random Orbital Sanders.
- 3/16" diameter orbit, central vacuum-ready.
- 6" diameter pads, with choice of PSA or Hook-Face Pads.
- Also includes bonus Tool Bag and T-Shirt.

Model 10010

- Includes Sanders with PSA pads.

Model 10011

- Includes Sanders with Hook-Face pads.



Pneumatic Portable Dry Vacuum System

Model 64625

- Spark-free operation.
- 10 gallon capacity.

- **Stainless Steel Construction**
- **Air Flow Adjustment Dial**

- **Top Tool Shelf**
- **Two 16' Coaxial Hose Assemblies**

Model Number	Capacity Gallon	Air Pressure PSIG	Water Static Lift Inch	Sound Level	Shipping Weight lbs.	Height Inch	Width Inch
64625	10	110-120	90	73 dB(A)	48	44	19

Electric Portable Dry Vacuum Accessories

- Designed specifically for Dynabrade vacuums.

Vacuum Trays

- Help organize tools, abrasives, etc.

96567

- 9.9 gallon.

96563

- 17 gallon.



96567 Vac Tray




96563 Vac Tray

Hose Hanger

96581

- Keeps hoses out of the way and off the floor.
- Can be placed anywhere on the trays for your convenience.
- Requires vacuum tray.

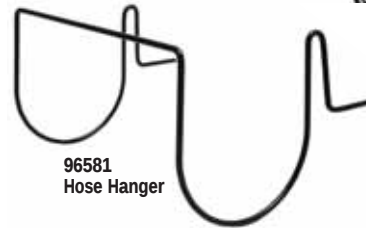


96581
Hose Hanger

Wall Mount Bracket

For 9.9 Gallon Vacuum Only

96534

- For those wanting a stationary vacuum.

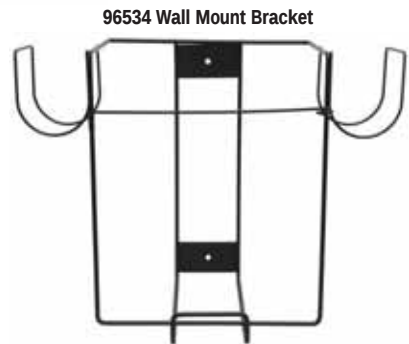

96534 Wall Mount Bracket

Locking Front Wheel

80051

- Stabilize vacuum movement.



80051
Wheel

Cleaning Kit

96558

- Attachments for other cleanup jobs.
- Includes 6' long x 1-1/4" dia. vacuum hose, curved handle and two extension pipes along with round brush, crevis tool and coarse dirt nozzle attachments.



96558
Cleaning Kit

Edge Guard

For 9.9 Gallon Vacuum Only

61361

- Prevents scratching of surfaces when not on trolley.



61361
Edge Guard

Filters

64683

Standard Filter

- 1-micron filtering.

64684

H.E.P.A. Filter

- The highest in cartridge filtration; 0.3-micron filtering.



64684 H.E.P.A. Filter

Closing Vacuum Bags

- Strong disposable vacuum bags that have a closing feature for unwanted contamination. 0.5-micron filtering.

64682

9.9 Gallon

80076

17 Gallon



64682
9.9 Gallon
Vacuum Bags

Vacuum Hoses

3/4" Diameter Exhaust Hoses

95729

- Hose by-the-foot (no cuffs). Specify length desired.
Order 95602 Factory-Installed Cuffs, if desired.



1" Diameter Exhaust Hoses

50682

- 6 feet long with two cuffs.

95709

- 10 feet long with two cuffs.

95395

- Hose-by-the-foot (no cuffs). Specify length up to 50 feet.
Order 95599 Factory-Installed Cuffs, if desired.

1-1/4" Diameter Exhaust Hoses

54205

- Hose-by-the-foot (no cuffs). Specify length up to 50 feet.
Order 95894 Factory-Installed Cuffs, if desired.



1-1/2" Diameter Exhaust Hoses

95847

- Hose-by-the-foot (no cuffs). Specify length up to 50 feet.



Vacuum Hose Swivel Adapters

- Adds flexibility to vacuum hose connection.

96572

1" Swivel Adapter

96573

1-1/4" Swivel Adapter



Hose Cuffs

All measurements are I.D.

95601



3/4" Thread

3/4" Non-Thread

95396



1" Thread

1" Non-Thread

95800

- Use optional 95895 Insert to mount to tool's vacuum outlet on non-thread end.



1-1/4" Thread

1-1/4" Non-Thread

96413



1-1/4" Thread

1-1/2" Thread

95894



1-1/4" Thread

1" Non-Thread

96412

- Use to connect two 1-1/4" hoses.



1-1/4" Thread

1-1/4" Thread

96006

- Cuff swivels.



1-1/4" Thread

1" Non-Thread

96414



1-1/2" Non-Thread

1-1/4" Thread

95699



1-1/4" Non-Thread

1-1/2" Thread

96102

- Use optional 95895 Insert to mount to tool's vacuum outlet; or 95396 Hose Cuff for 1" exhaust hose.



1-1/2" Thread

1-1/4" Non-Thread

96103



1-1/2" Thread

1" Non-Thread

97051



2" Non-Thread

1-1/2" Thread

95698

- Cuff swivels.



2" Non-Thread

2-1/4" Thread

96004

- Cuff swivels.



1-1/4" Thread

1-1/4" Non-Thread

96104



1-1/2" Thread

1" Non-Thread

- Keeps air line out of the way.

95700

- Includes 95699 Cuff Adapter and 95698 2" Swivel Cuff.
- Use with optional 95396 Hose Cuff for 1" Exhaust Hose.



2" Thread

1-1/4" Non-Thread

96580

- Hose Assy.



1-1/4" Thread

2" Non-Thread

54208



1" Thread

1-1/4" Non-Thread

Vacuum and Air Line Accessories

Air Line Hoses

95361

- 5 feet long, with male and female fittings.

11292

- 3/8" I.D. with two 1/4" male fittings. 8 feet long.

95938

- One set, factory-installed male and female fittings.

95807

- 1/4" air line custom length, no fittings (specify length). Use 95938.

95580

- 28 inches long with male and female fittings.

95870

- 1/2" I. D. with male and female fittings. 5 feet long.

94855/Whip Hose Assembly

- Includes 96321 Air Hose, 5 feet long, and 94300 Composite Dynaswivel®.



Swivel Air Line Hoses

- Eliminates kinking. Tough, flexible and lightweight.
- Fittings swivel 360° for easy use.

Part No.	Description	Hose Dia.	Length
96217	1/4" Female to 1/4" Male	1/4"	3 ft.
96218	1/4" Female to 1/8" Male	1/4"	3 ft.
96219	1/4" Female to 1/4" Male	1/4"	6 ft.
96220	1/4" Female to 1/8" Male	1/4"	6 ft.
96221	Hose by the foot (no fittings). Order fittings separately, if desired.	1/4"	Custom
96225	1/4" NPT Female Fitting	For 1/4" Hose	—
96226	1/4" NPT Male Fitting	For 1/4" Hose	—
96227	1/8" NPT Male Fitting	For 1/4" Hose	—
96228	1/4" NPT Female Fitting	For 3/8" Hose	—
96229	1/4" NPT Male Fitting	For 3/8" Hose	—



6' Long Flex-Hose Systems

- All systems include 6' long flex-hose.

50617

- Has 50683 Standard Reusable Cloth Bag with hook 'n loop for easy emptying.

56303

- Has 56304 Zipper-Lock Bag.

54420

- Includes 50683 Cloth Bag, 95361 6 ft. air line, 95362 Rubber Connectors and 50682 Exhaust Hose.



Bag-In-A-Box System

54217

- Includes: 95816 Air Line 11' long, 95709 Flex-Hose (1" dia. x 10' long), 95362 Rubber Connectors (5) and 95575 Durable Box Receptacle.
- Sample paper bag included. Paper bag reorder: 50692 (400/case) or 50693 (24/pkg.)

Longer hose lengths available for both systems! Also available without bag and box: Order 95820 Hose Assembly which includes 95816, 95709, and 95362 described above.



Vacuum and Air Line Accessories

Reusable Cloth Bags

56304

- With zipper. Both these collection bags measure 14-1/2" long x 7-1/2" wide and connect to vacuum hose. 5-micron filtration.



50683

- With hook 'n loop closure.

Mini-Reusable Cloth Bags

50694

- 11" long x 3" wide bag connects to vac hose or directly to tool.
- Has hook 'n loop closure. 5-micron filtration.



54284

- 95580 Air line 1/4" dia. x 28" long.
- 50638 Flex-hose 1" dia x 18" long.
- 50694 Mini-Reusable Cloth Bag.
- 95362 Rubber Bands which connect air line to exhaust hose.

Exhaust Hose Assembly

95820

- 1" diameter x 10' long.
- 95709 Flex Hose (1" dia., 10' long with cuffs).
- 95816 Air Line (1/4" dia., 11' long).
- 95362 Rubber Bands.
- Use with Dynorbital® sanders.



Hose Cover

95986

- 5' long cloth cover.
- Covers air line and exhaust/vacuum hoses (not included).
- Eliminates damage from hoses dragging on the workpiece.



Rubber Bands

95362

- Five per package. Used to strap tool air line to tool's exhaust hose for easy "all-in-one" maneuverability.



In-Line Speed Regulators

- Mounts directly to air tool.

95745

- 1/4" NPT connection (25 CFM).

95746

- 3/8" NPT connection (26-45 CFM).



Coaxial Vacuum Hose Assemblies

For Dynabrade Vacuum Systems

See Page 41 for Electric Models 61300 and 61301


94941

1-1/4" x 20 ft.

- Includes everything as shown below.
- Air line is inside of exhaust hose for ease of use and convenience.

Compared To The Competition:

- 2 - 4 ft. longer.
- 2 lbs. lighter.
- More flexible exhaust hose.
- 66% lighter airline – see below on this page for specific details.
- Added features of the swivel adapter, Dynabrade's button-release coupler.

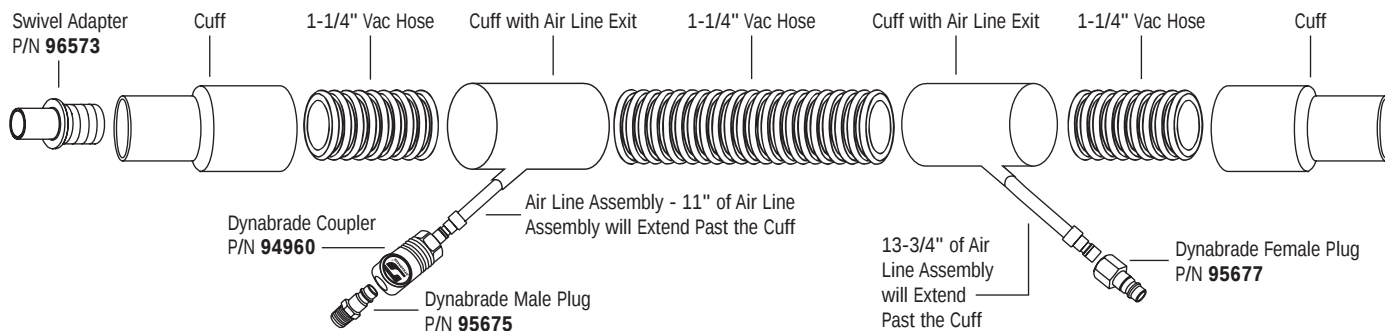

Flex-Hose Air Line

- Abrasion resistant.
- For use on air tools and spray equipment.
- Two-thirds lighter than PVC/rubber-type hose.
- 290 lbs. working pressure. 870 PSI burst strength.

**LIGHTWEIGHT,
TOUGH AND HIGHLY
FLEXIBLE!**



3/8" Sizes

94851

- 12 ft. with male to male fittings.

94852

- 12 ft. with male to female fittings.

94876

- 25 ft. with male to male fittings.

94892

- 25 ft. with male to female fittings.

94853

- 50 ft. with male to male fittings.

94854

- 50 ft. with male to female fittings.

94860

- 328 ft., bulk roll, no fittings.

94860

- Hose-by-the-foot, up to 328 ft, no fittings.

Factory Installed Fittings

96497

- Male and male.

96491

- Male and female.

Sanding Pad Store Counter Display Pack

- Each display pack consists of ten pads in a refillable Dynabrade display box.
- These are our premium urethane balanced random orbital sanding pads.
- All pads have a 5/16"-24 male thread.
- Fit most other brands of sanders also.

Part Number	Contents
95994	56106 – 5" Non-Vac
95995	56104 – 5" Vacuum
95996	56107 – 6" Non-Vac
95997	56105 – 6" Vacuum



Sanding Pads Dynorbital-Spirit®/Two-Hand Dynorbital®/DynaLocke®

- All pads: 5/16"-24 male thread. • 13,000 RPM maximum rated. • Fit most brands of orbital sanders. • Perfectly balanced for use with Spirit sanders!

Good
Rubber Pad



Better
Urethane Value Line



PSA Only

Best (Standard on Tools)
Premium Urethane



PSA and Hook-Face

Best (Channel-Vac Pads)
Premium Urethane

- Circular recessed channel is 1/8" deep into the pad face connecting the pad's vacuum holes.
- Eliminates need to align the pre-punched holes in the abrasive with the holes in the pad.
- Great for production situations.



3/8" Thick, Low Profile

PSA

Pad Construction	Density	5" Diameter		6" Diameter	
		Non-Vacuum	Vacuum	Non-Vacuum	Vacuum
Rubber	Medium	50630	50631	50632	50633
Rubber Post Pattern	Medium	—	50695	—	50696
Value Urethane	Medium	56205	56207	56206	56208
Premium Urethane	Soft	56102	56100	56103	56101
Premium Urethane	Medium	56106	56104	56107	56105
Premium Urethane Channel-Vac	Soft	—	56251	—	56261
Premium Urethane Channel-Vac	Medium	—	56252	—	56262

Hook-Face, Short Nap

Premium Urethane	Soft	56157	56155	56158	56156
Premium Urethane	Medium	54325	54326	54327	54328
Premium Urethane Channel-Vac	Soft	—	56253	—	56263
Premium Urethane Channel-Vac	Medium	—	56250	—	56260

Hook-Face, Long Nap (For Non-Woven Nylon)

Rubber	Medium	50605	50607	50606	50610
--------	--------	-------	-------	-------	-------

5/8" Thick, All Premium Urethane

- A thicker pad conforms more easily to curved and contoured surfaces and makes it ideal for featheredging.

PSA

Density	3" Diameter Dual Purpose	3-1/2" Diameter Dual Purpose	5" Diameter		6" Diameter	
			Non-Vacuum	Vacuum	Non-Vacuum	Vacuum
Soft	56086	56097	56185	56186	56187	56188
Medium	56084	56098	56175	56176	56177	56178
Channel-Vac Soft	—	—	—	56256	—	56266
Channel-Vac Medium	—	—	—	56254	—	56264

Hook-Face, Short Nap

Soft	—	54311	56195	56196	56197	56198
Medium	56087	54313	56180	56181	56182	56183
Channel-Vac Soft	—	—	—	56257	—	56267
Channel-Vac Medium	—	—	—	56255	—	56265

Hook-Face, Long Nap (For Non-Woven Nylon)

Medium	56090	54314	—	—	—	—
--------	-------	-------	---	---	---	---

Sanding Pads

Mesh Abrasive Vacuum Pads

- Vacuum sanding pads compatible with mesh abrasives for improved finish and longer abrasive life (mesh abrasives from Mirka Co. for example are screen-like on grit side and hook on back).
- 13,000 RPM maximum operating speed. Common 5/16"-24 male thread on 5" and 6" pads. 3/8" thick. Premium urethane resists heat and provides longevity.

56320
5" Diameter

- 44 holes.


56321
6" Diameter

- 52 holes.

56322
8" Diameter

- 48 holes.

56320

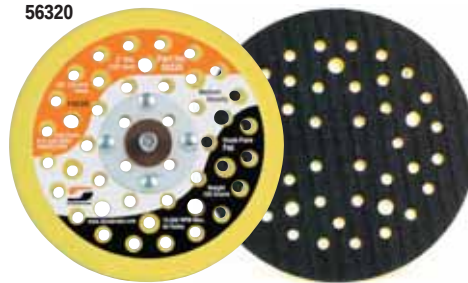

Note: All 8" pads mount with screws.

Loop-Face Sanding Pads for 3M™ Hookit™ II Discs

- Created for reverse hook 'n loop abrasives. Securely holds discs and allows for easy change and reattachment.
- Premium urethane resists heat and provides maximum durability. Weight-mated and perfectly balanced – assures performance.
- 5/16"-24 male thread fits many brands of random orbital sanders. 13,000 RPM maximum operating speed.

Part No.	Diameter	Type
56310	5"	Non-Vac
56311	5"	Vacuum
56312	6"	Non-Vac
56313	6"	Vacuum

Radius Edge Pads

- Ideal for finishing surfaces with contoured corners!
- Premium foam, soft density, rounded edge pad conforms to shape of coves and corners. 5/16"-24 Male Thread.
- Ideal for use with scalloped-edge abrasives. Scalloped edge easily conforms to rounded edge of sanding pad, allowing more abrasive to contact work surface.

57796
3-1/2" Diameter

57795
5" Diameter



6" & 8" Random Orbital and "Mud Hog" Pads

PSA

Pad Construction	Density	6" Diameter				8" Diameter	
		Non-Vacuum	Screws	Vacuum	Screws	Non-Vacuum	Vacuum
Premium Urethane	Medium	57771	4	57772	4	56234	56235
Premium Urethane	Medium	57767	5	57763	5	—	—
Premium Urethane	Medium	57380	6	57381	6	—	—



57772



57773



54333

Hook-Face, Short Nap

Pad Construction	Density	6" Diameter				8" Diameter	
		Non-Vacuum	Screws	Vacuum	Screws	Non-Vacuum	Vacuum
Premium Urethane	Medium	57773	4	57775	4	56234	56235
Premium Urethane	Medium	57764	5	57765	5	—	—
Premium Urethane	Medium	57387	6	57388	6	—	—

Hook-Face, Long Nap (For Non-Woven Nylon)

Pad Construction	Density	6" Diameter				8" Diameter	
		Non-Vacuum	Screws	Vacuum	Screws	Non-Vacuum	Vacuum
Rubber	Medium	—	—	—	—	54332	54333

Note: All 8" pads mount with screws.

11" Rotary and Random Sanding Pads

- For vacuum and non-vacuum use. Pads mount with screws.

56231
Hook-Face Pad



56230
PSA Pad



56232
Loop-Face Pad

- Accepts 3M™ Hookit™ II abrasive discs.



56220
Conversion Pad

- Allows attachment of 3M™ Hookit™ II abrasive discs to 56231 Hook-Face Pad. Non-Vacuum only.



3M and Hookit II are registered trademarks of 3M Company.

Sanding Pads

2-3/4" Wide x 8" Long Dynaline Pads

Part No.	Type	Description
57454	Non-Vacuum	PSA
57455	Vacuum	PSA
57456	Non-Vacuum	Hook-Face "Short Nap"
57457	Vacuum	Hook-Face "Short Nap"
57471*	Non-Vacuum	Hook-Face "Long Nap"

Note: For PSA pad with clips, order 57460; uses 2-3/4" x 11" abrasive sheets.



8" Dynaline Contoured Specialty Pads

- Accepts 2-3/4" wide x 8" long PSA abrasive sheets.

57458

- Curved pad.

57462

- Radiused pad.



3-2/3" Wide x 7" Long Pads

Part No.	Type	Description
57850	Non-Vacuum	PSA
57851	Non-Vacuum	Hook-Face "Short Nap"
57852*	Non-Vacuum	Hook-Face "Long Nap"
57855	Vacuum	PSA
57856	Vacuum	Hook-Face "Short Nap"



2-3/4" Wide x 11" Long Dynaline Pads

- Premium urethane pad resists heat build-up.
- For use with PSA or hook-face coated abrasives and non-woven nylon sheets or rolls.


Part No.	Density	Description
57511	Medium	PSA
57512	Medium	PSA
57513	Medium	Hook-Face "Short Nap"
57514*	Medium	Hook-Face "Long Nap"



Dynafine® Sanding Pads


Triangular Pads

Part No.	Description
57950	PSA
57951	Short-Nap, Hook-Face
57955*	Long-Nap, Hook-Face



Tear-Drop Pads

Part No.	Description
57952	PSA
57953	Short-Nap, Hook-Face
57954*	Long-Nap, Hook-Face



***Note:** Long Nap Pads are designed for use with non-woven nylon.

Wet Dynafine® Sanding Pads



Part No.	Diameter	Type
58025	2"	Loop-Face (Trizact™ and Hookit II™)
58030	2"	PSA
58031	2"	Hook-Face
58026	3"	Loop-Face (Trizact™ and Hookit II™)
58032	3"	PSA
58033	3"	Hook-Face

Trizact and Hookit II are registered trademarks of 3M Company.