


AIR HANDLING CAPACITY

- Basic Flow Size defines the air flow capacity
- Please do not confuse Basic Flow Size with Thread Size
- Thread Size is not directly related to air flow capacity in any way

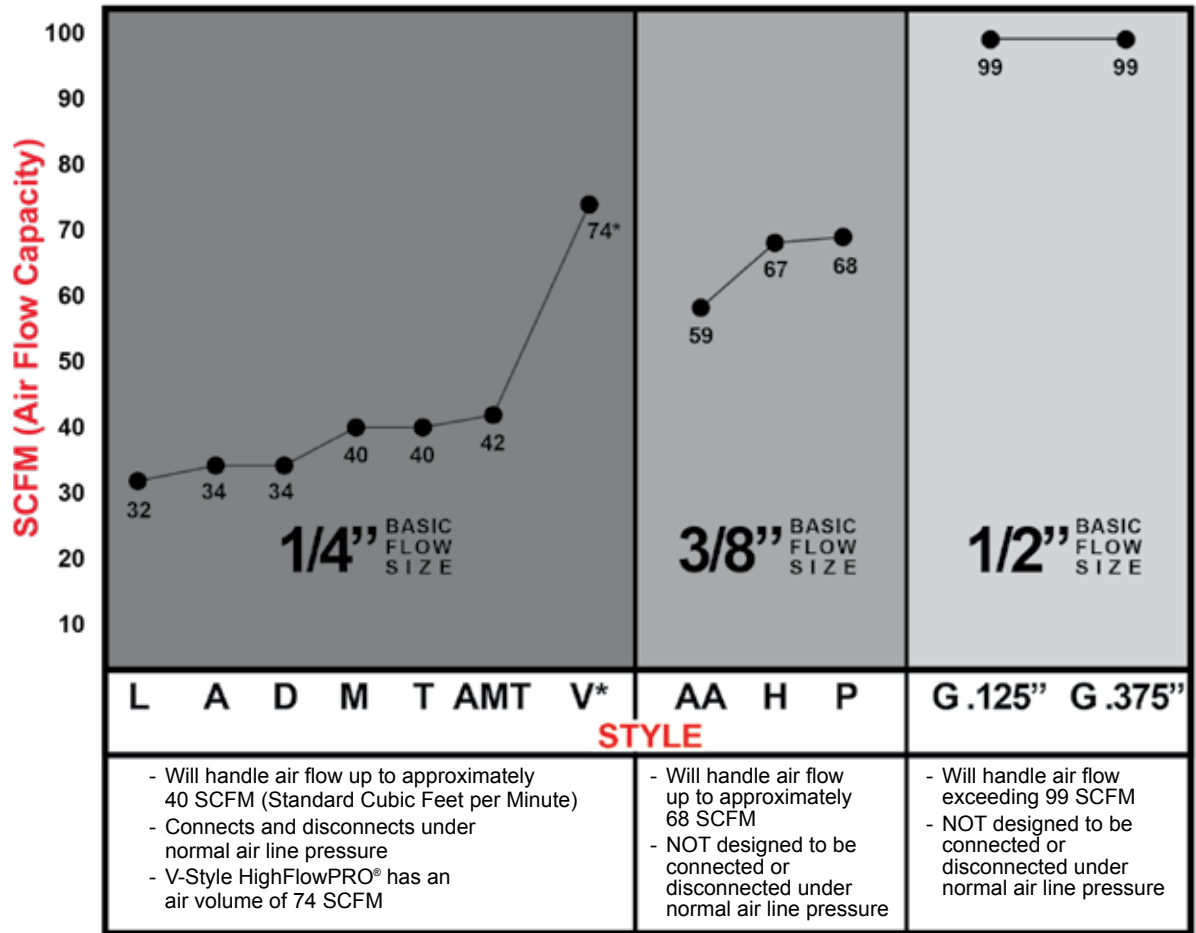

*Low Pressure, High Volume

DEFINITION OF TERMS

DRAG GUARD



Protects couplers from accidental disconnection

PUSH-TYPE



Eliminates need to retract coupler sleeve to connect. Convenient and time saving option

PUSH-ON & LOCK

Push cut hose onto hose barb. Locks hose in place. Only for use with Push-on & Lock hose on page 36


RE-CAP

Recap plugs screw directly onto tire valves to allow for direct coupler connection and faster pressurization

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

SAFETY EXHAUST COUPLERS

Connects with the five most popular plug styles

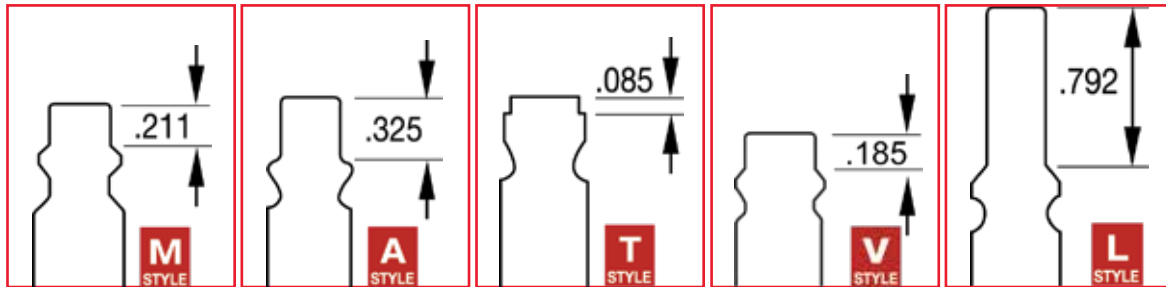


5 IN ONE™ UNIVERSAL

- Push type connection - push plug into coupler to connect, pull back sleeve to release. Convenient and time saving
- Safely disengages fitting without dangerous blow-back from trapped pressure inside your air line or hose
- Heavy-duty steel design with steel plug release sleeve and aluminum safety lock sleeve

1/4" Basic Flow Size					
Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs
1750	1750BK	s-1750	1	1/4"	Female
1751	1751BK	s-1751	1		Male
1752	1752BK	s-1752	1	3/8"	Female
1753	1753BK	s-1753	1		Male
1754	1754BK				1/4" ID Hose Barb
1755	1755BK				3/8" ID Hose Barb

NEW

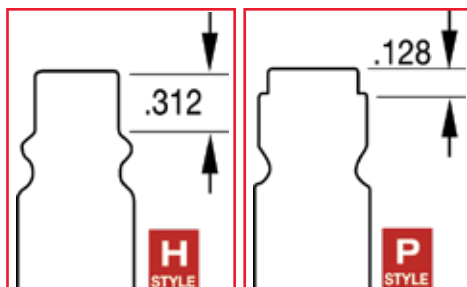

H-STYLE
INDUSTRIAL

P-STYLE
TRU-FLATE/PARKER



• Connects with H- and P-style 3/8" basic flow plugs


- Maximum inlet pressure: 200 PSI
- Maximum temperature: 225°F

NEW

3/8" Basic Flow Size					
Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs
1756	1756BK	s-1756	1	1/4"	Female
1757	1757BK	s-1757	1		Male
1758	1758BK	s-1758	1	3/8"	Female
1759	1759BK	s-1759	1		Male



SAFETY EXHAUST COUPLERS (cont)

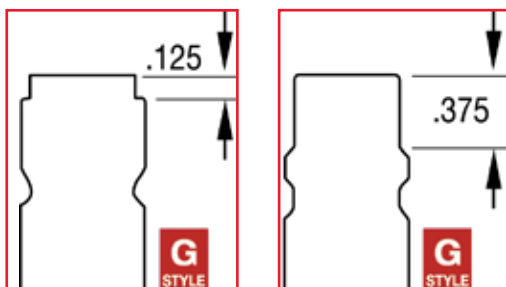

- Connects with G-style 1/2" basic flow plugs
- Maximum inlet pressure: 200 PSI
- Maximum temperature: 225°F

NEW


1/2" Basic Flow Size						
Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Connection	Feature
1773	1773BK	s-1773	1	1/2"	Female	Push Type w/Safety Exhaust Sleeve
1774	1774BK	s-1774	1		Male	



1773
1774

UNIVERSAL COUPLERS

Connects with the five most popular plug styles

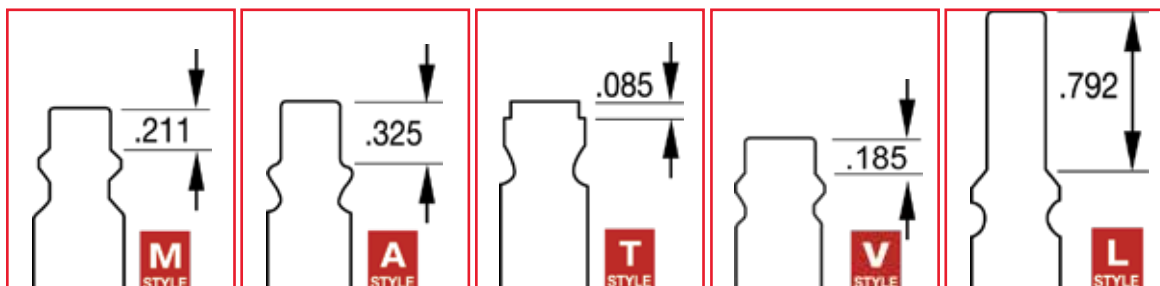

5 in ONE™
UNIVERSAL

- Push type connection - push plug into coupler to connect, pull back sleeve to release. Convenient and time saving
- Heavy-duty steel design
- Zinc-plated to resist rust

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs	Body
743	743BK	s-743	1	1/4"	Female	Steel
744	744BK	s-744	1		Male	



744

743