

TRACERLINE®

PROFESSIONAL OEM GRADE **LEAK DETECTION**



HEAVY-DUTY & FLEET

FLUORESCENT LEAK DETECTION AND DIAGNOSTIC TOOLS



READY
FOR TOMORROW'S
CHALLENGES



FREIGHTLINER



CNH
INDUSTRIAL

KENWORTH



**TRUSTED BY
AUTOMOTIVE
LEADERS**

— SINCE 1955 —



CATERPILLAR®



CHRYSLER



ISO 9001:2015 CERTIFIED COMPANY

TRACERPRODUCTS
A Division of Spectronics Corporation

EV & HYBRID A/C DYE

oem
GRADE

BRIGHTER
DYE
PERFORMANCE

CO-SOLVENT
FREE



NEXT-GEN DYES

Electrically-driven A/C compressors require compatible leak detection dyes




TESTED EXTENSIVELY

Tracer Products manufactures electric and hybrid fluorescent dyes with OEM-grade A/C oil



COMPLETELY COMPATIBLE

Tracerline® electric and hybrid dyes can be used in electrically driven automotive air conditioning systems without creating a safety issue



SCAN TO
LEARN MORE



POE-BASED EV A/C DYE UV LEAK DETECTION KIT

Compatible with both R-1234yf & R-134a

Mini-EZ™ POE-Based EV/Hybrid A/C Leak Detection Kit includes (3) 0.25 oz (7 ml) single-dose dye cartridges, OPTI-PRO™ UV flashlight, (2) solid-brass swivel-type couplers (R-134a & R-1234yf), and GLO-AWAY™ Plus.

TP0PUV20EV*

- ▶ **TP0PUV** OPTI-PRO™ UV cordless, violet light LED leak detection flashlight
- ▶ **TP9815EV-P3*** (3) 0.25 oz (7 ml) Mini-EZ™ single-dose POE-Based EV A/C dye cartridges, services up to **3 vehicles**
- ▶ **TP9845** EZ-Ject™ dye injector assembly
- ▶ **TP9813** Brass, swivel-type R-134a coupler for EV/Hybrid with check valve and purge fitting
- ▶ **TP28** Brass, swivel-type R-1234yf coupler for EV/Hybrid with check valve and purge fitting
- ▶ **TP19** 2 oz (60 ml) spray bottle of GLO-AWAY™ Plus fluorescent dye cleaner

*Compatible with Hybrid Vehicles



NEW!

SERVICES
UP TO
3

VIOLET
LIGHT
LED

UP TO
20ft
(6m)
Inspection
Range

3x
AAA
Batteries
Included

Fluorescence
Enhancing

GLO-AWAY™
Plus +

Underhood
Labels



POE-BASED EV A/C DYE MINI-EZ™ INJECTION KIT

Compatible with both R-1234yf & R-134a

- ▶ Fast and economical way to add leak detection dye to an electric vehicle's A/C system

Product No.	Description
TP9815EV-P3*	(3) 0.25 oz (7 ml) Mini-EZ™ single-dose POE-Based EV A/C dye cartridges, services up to 3 vehicles
TP9815EV-P12*	(12) 0.25 oz (7 ml) Mini-EZ™ single-dose POE-Based EV A/C dye cartridges, services up to 12 vehicles
TP9814EV-BX*	▶ TP9815EV-P3 (3) 0.25 oz (7 ml) Mini-EZ™ Single-Dose POE-Based EV A/C dye cartridges, services up to 3 vehicles ▶ TP9845 EZ-Ject™ dye injector assembly ▶ TP9813 Brass, swivel-type R-134a coupler for EV/Hybrid with check valve and purge fitting ▶ TP28 Brass, swivel-type R-1234yf coupler for EV/Hybrid with check valve and purge fitting

*Compatible with Hybrid Vehicles



NEW!

SERVICES
UP TO
3



POE-BASED EV A/C OIL

NEW!

Compatible with both R-1234yf & R-134a

Product No.	Description
TP100EV-5*	5 oz (148 ml) foil pouch Viscosity: 84 cSt



*Compatible with Hybrid Vehicles



POE-BASED EV A/C OIL + UV DYE

NEW!

Compatible with both R-1234yf & R-134a

Product No.	Description
TP100EVD-5*	5 oz (148 ml) foil pouch Viscosity: 84 cSt



*Compatible with Hybrid Vehicles



PAG-BASED EV A/C DYE MINI-EZ™ INJECTION KIT

Compatible with both R-1234yf & R-134a

► Designed to meet manufacturer specifications for PAG compressors

Product No.	Description
TP9816EV-P3*	(3) 0.25 oz (7 ml) Mini-EZ™ single-dose PAG-Based EV A/C dye cartridges, services up to 3 vehicles
TP9816EV-P12*	(12) 0.25 oz (7 ml) Mini-EZ™ single-dose PAG-Based EV A/C dye cartridges, services up to 12 vehicles
TP9817EV-BX*	► TP9816EV-P3 (3) 0.25 oz (7 ml) Mini-EZ™ single-dose PAG-Based EV A/C dye cartridges, services up to 3 vehicles ► TP9845 EZ-Ject™ dye injector assembly ► TP9813 Brass, swivel-type R-134a coupler for EV/Hybrid with check valve and purge fitting ► TP28 Brass, swivel-type R-1234yf coupler for EV/Hybrid with check valve and purge fitting

*Compatible with Hybrid Vehicles



NEW!



TO MEET INDUSTRY OEM SPECIFICATIONS



Compatible with R-134a
& R-1234yf systems

Concentrated
formula does not
affect the system
properties



Each cartridge is
individually sealed to
protect against moisture

DESIGNED WITH
DIELECTRIC PROPERTIES
TO **ENSURE SAFETY &
COMPATIBILITY**



R-1234yf/PAG A/C DYE

oem
GRADE

BRIGHTER
DYE
PERFORMANCE

CO-SOLVENT
FREE

FLUORO-LITE® 5 BOTTLED DYE

A/C DYE FOR R-1234yf/PAG

For R-1234yf/PAG vehicle air conditioning systems. Use a Tracerline dye injector to add bottled dye into the A/C system.

MEETS
SAE
J2297

BRIGHTER
DYE
PERFORMANCE



SERVICES
UP TO
32

INLINE
INJECTOR



TP9883-BX



REFILLABLE INJECTOR

Product No.	Description
TP3825-8	8 oz (237 ml) R-1234yf/PAG bottle, services up to 32 vehicles
TP9883-BX	Inline Injector, 2 oz (60 ml) capacity. Control valve, R-1234yf hose/coupler & purge fitting.

See price list for all available dye sizes.

EZ-Ject™ SYSTEM


A/C DYE FOR R-1234yf/PAG

FEATURES:


- ▶ 0.5 oz (15 ml) cartridge
- ▶ Multi-dose, services up to **14 vehicles**

MEETS
SAE
J2297

BRIGHTER
DYE
PERFORMANCE

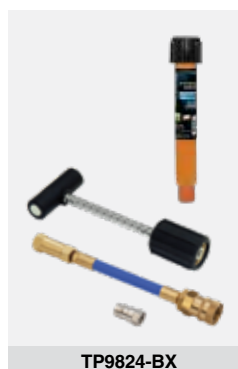

TP9824-BX

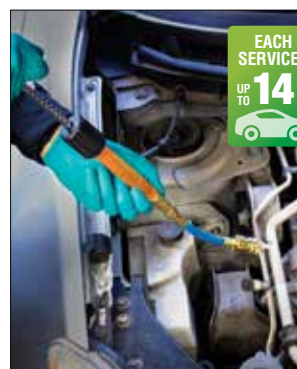

EACH
SERVICES
UP TO
14

Product No.	Description
TP9825-P3	(3) EZ-Ject™ R-1234yf/PAG cartridges
TP9824-BX	EZ-Ject™ Dye Injection Kit: ▶ TP9825 EZ-Ject™ R-1234yf/PAG cartridge ▶ TP9845 EZ-Ject™ dye injector assembly ▶ TP10 R-1234yf hose/coupler & purge fitting

BigEZ™ SYSTEM


A/C DYE FOR R-1234yf/PAG

FEATURES:


- ▶ 8 oz (237 ml) cartridge
- ▶ Multi-dose, services up to **64 vehicles**

MEETS
SAE
J2297

BRIGHTER
DYE
PERFORMANCE

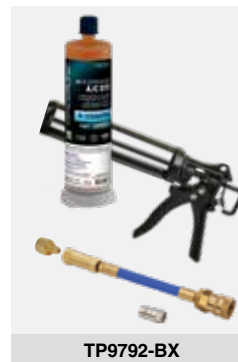

TP9792-BX

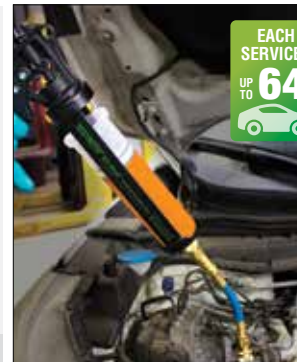

EACH
SERVICES
UP TO
64

Product No.	Description
TP9725-8	8 oz (237 ml) BigEZ™ R-1234yf/PAG cartridge
TP9792-BX	EZ-Shot™ Dye Injection Kit: ▶ TP9725-8 BigEZ™ R-1234yf/PAG cartridge ▶ TP9749 EZ-Shot™ caulking gun-style dye injector assembly ▶ TP12 R-1234yf hose/coupler with BigEZ™ adapter & purge fitting

RECOMMENDED DYE DOSAGE:

	PRODUCT NUMBER	STANDARD DOSE
Fluoro-Lite® 5 Bottled Dye	TP3825	0.25 oz (7 ml)Ⓢ per 5 lbs (2 kg) of refrigerant or 10 oz (300 ml) of lubricant
EZ-Ject™ Cartridge	TP9825	0.035 oz (1 ml)Ⓢ per 2.5 lbs (1 kg) of refrigerant or 5 oz (150 ml) of lubricant
BigEZ™ Cartridge	TP9725	0.125 oz (3.7 ml)Ⓢ per 2.5 lbs (1 kg) of refrigerant or 5 oz (150 ml) of lubricant

ⓈEquivalent to 1 line on bottle/cartridge

oem
GRADEBRIGHTER
DYE
PERFORMANCECO-SOLVENT
FREE

R-134a/PAG A/C DYE

FLUORO-LITE® 5 BOTTLED DYE

A/C DYE FOR R-134a/PAG

REFILLABLE INJECTOR

For R-134a/PAG vehicle air conditioning systems. Use a Tracerline dye injector to add bottled dye into the A/C system.

MEETS
SAE
J2297BRIGHTER
DYE
PERFORMANCE

Product No.	Description
TP3820-8	8 oz (237 ml) R-134a/PAG bottle, services up to 32 vehicles
TP9882-BX	Inline Injector, 2 oz (60 ml) capacity. Control valve, R-134a hose/coupler & purge fitting.

See price list for all available dye sizes.

SERVICES
UP TO
32INLINE
INJECTOR

TP9882-BX



EZ-Ject™ SYSTEM

A/C DYE FOR R-134a/PAG


MULTI-DOSE

FEATURES:

- ▶ 0.5 oz (15 ml) cartridge
- ▶ Multi-dose, services up to **14 vehicles**

MEETS
SAE
J2297BRIGHTER
DYE
PERFORMANCE

Product No.	Description
TP9860-P6	(6) EZ-Ject™ R-134a/PAG cartridges
TP9848-BX	EZ-Ject™ Dye Injection Kit: ▶ TP9860 EZ-Ject™ R-134a/PAG cartridge ▶ TP9845 EZ-Ject™ dye injector assembly ▶ TP9847 R-134a hose/coupler & purge fitting

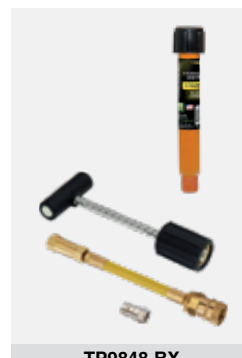

TP9848-BX

EACH
SERVICES
UP TO
14

BigEZ™ SYSTEM

A/C DYE FOR R-134a/PAG


HIGH-VOLUME DOSING

FEATURES:

- ▶ 8 oz (237 ml) cartridge
- ▶ Multi-dose, services up to **64 vehicles**

MEETS
SAE
J2297BRIGHTER
DYE
PERFORMANCE

Product No.	Description
TP9760-8	8 oz (237 ml) BigEZ™ R-134a/PAG cartridge
TP9793-BX	EZ-Shot™ Dye Injection Kit: ▶ TP9760-8 BigEZ™ R-134a/PAG cartridge ▶ TP9749 EZ-Shot™ caulking gun-style dye injector assembly ▶ TP9747 18 in (46 cm) R-134a hose/coupler with BigEZ™ adapter & purge fitting

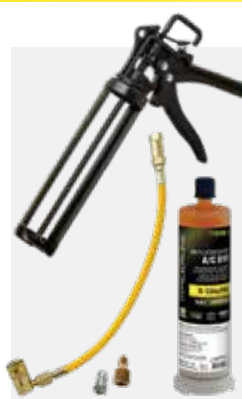

TP9793-BX

EACH
SERVICES
UP TO
64

RECOMMENDED DYE DOSAGE:

PRODUCT NUMBER		STANDARD DOSE
Fluoro-Lite® 5 Bottled Dye	TP3820	0.25 oz (7 ml)Ⓢ per 5 lbs (2 kg) of refrigerant or 10 oz (300 ml) of lubricant
EZ-Ject™ Cartridge	TP9860	0.035 oz (1 ml)Ⓢ per 2.5 lbs (1 kg) of refrigerant or 5 oz (150 ml) of lubricant
BigEZ™ Cartridge	TP9760	0.125 oz (3.7 ml)Ⓢ per 2.5 lbs (1 kg) of refrigerant or 5 oz (150 ml) of lubricant

ⓈEquivalent to 1 line on bottle/cartridge

UNIVERSAL/ESTER A/C DYE



**CO-SOLVENT
FREE**

FLUORO-LITE® 5 BOTTLED DYE

A/C DYE FOR UNIVERSAL/ESTER

Tracerline® Universal/Ester dyes are designed to be compatible with all widely used refrigerants for automotive AC systems (R-1234yf, R-134a, and more).

MEETS
SAE
J2297



REFILLABLE INJECTOR

INLINE
INJECTOR



TP9882-BX



SERVICES
UP TO
32

See price list for all available dye sizes.

EZ-Ject™ SYSTEM

A/C DYE FOR UNIVERSAL/ESTER


FEATURES:

- ▶ 0.5 oz (15 ml) cartridge
- ▶ Multi-dose, services up to **14 vehicles**
- ▶ Treats R-134a and R-1234yf systems


MEETS
SAE
J2297



Product No.	Description
TP9870-P6	(6) EZ-Ject™ Universal/Ester cartridges
TP9841-BX	EZ-Ject™ Dye Injection Kit: ▶ TP9870 EZ-Ject™ Universal/Ester cartridges ▶ TP9845 EZ-Ject™ dye injector assembly ▶ TP9847 R-134a hose/coupler & purge fitting ▶ TP9831 R-1234yf adapter

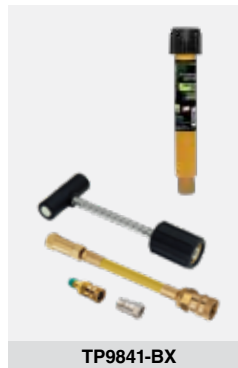

TP9841-BX

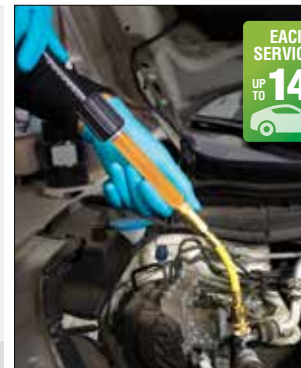

EACH
SERVICES
UP TO
14

BigEZ™ SYSTEM

A/C DYE FOR UNIVERSAL/ESTER


FEATURES:

- ▶ 8 oz (237 ml) cartridge
- ▶ Multi-dose, services up to **64 vehicles**
- ▶ Treats R-134a and R-1234yf systems

MEETS
SAE
J2297



Product No.	Description
TP9770-8	8 oz (237 ml) BigEZ™ universal/ester cartridge
TP9790-BX	EZ-Shot™ Dye Injection Kit: ▶ TP9770-8 8 oz (237 ml) BigEZ™ universal/ester cartridge ▶ TP9749 EZ-Shot™ caulking gun-style dye injector assembly ▶ TP9747 18 in (46 cm) R-134a hose/coupler with BigEZ™ adapter & purge fitting ▶ TP9831 R-1234yf adapter

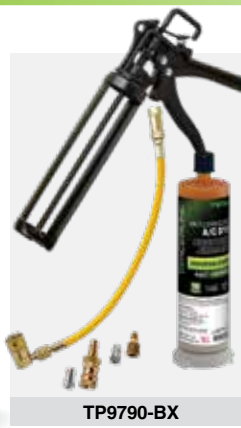

TP9790-BX



EACH
SERVICES
UP TO
64

HIGH-VOLUME DOSING

RECOMMENDED DYE DOSAGE:

PRODUCT NUMBER		STANDARD DOSE
Fluoro-Lite® 5 Bottled Dye	TP3840	0.25 oz (7 ml)Ⓐ per 5 lbs (2 kg) of refrigerant or 10 oz (300 ml) of lubricant
EZ-Ject™ Cartridge	TP9870	0.035 oz (1 ml)Ⓐ per 2.5 lbs (1 kg) of refrigerant or 5 oz (150 ml) of lubricant
BigEZ™ Cartridge	TP9770	0.125 oz (3.7 ml)Ⓐ per 2.5 lbs (1 kg) of refrigerant or 5 oz (150 ml) of lubricant

NOTE: R-1234yf systems require TP9831 adapter

ⒶEquivalent to 1 line on bottle/cartridge

COOLANT DYES

WATER-BASED DYE

RITE-BLEND™ UNIVERSAL COOLANT DYE

For both Conventional & Extended-Life Coolants

OEM-Grade coolant dye that will not change the host color of the coolant. Works with all leak detection flashlights. Dye fluoresces yellow-green.


Product No.	Description
TP-3940-0008	8 oz (237 ml) bottle, services up to 8 vehicles

See price list for all available dye sizes.



RECOMMENDED DYE DOSAGE:

FLUID	TP-3940
Coolant	1 oz (30 ml) per 6 gal (23 L)



RETAINS THE ORIGINAL COOLANT COLOR

STANDARD COOLANT DYE

For all Conventional Coolants

Works with all leak detection flashlights. Dye fluoresces yellow-green.

Product No.	Description
TP-3900-0008	8 oz (237 ml) bottle, services up to 8 vehicles

NOTE: May alter the original color of the coolant

See price list for all available dye sizes.



RECOMMENDED DYE DOSAGE:

FLUID	TP-3900
Coolant	1 oz (30 ml) per 6 gal (23 L)



FLUID DYE FOR OIL-BASED SYSTEMS

oem
GRADE

BRIGHTER
DYE
PERFORMANCE

CO-SOLVENT
FREE

UV FLUORESCENT DYE

For all Circulating Oil-Based Fluid Systems

Patented, full-spectrum formulation. Works with all leak detection flashlights. Dye fluoresces yellow-green.

Product No.	Description
TP3400-8	8 oz (237 ml) bottle, services up to 8 vehicles

See price list for all available dye sizes.



RECOMMENDED DYE DOSAGE:

FLUID APPLICATIONS

Engine Oil (includes Synthetics)	
Gasoline	1 oz (30 ml) per 4-6 qt (4-6 L)
Diesel	1 oz (30 ml) per 4 qt (4 L)
Power Steering	1 oz (30 ml) per 4 qt (4 L)
Automatic Transmission	1 oz (30 ml) per 6 qt (6 L)
Fuel (Gasoline + Diesel)	1 oz (30 ml) per 6-9 gal (23-34 L)
Hydraulics (Synthetic- or Petroleum-Based)	
Light-to-Medium Colored	1 oz (30 ml) per 2-3 gal (7.5-11 L)
Very Dark or Intensely Blue	1 oz (30 ml) per 2-3 qt (2-3 L)

UV FLUORESCENT DYE - MULTI-COLORED

For all Circulating Oil-Based Fluid Systems

With a set of color-coded leak detection dyes, a technician can diagnosis leaks across multiple, oil-based fluids – including transmission, oil and fuel. **Even in dirty diesel!**

Product No.	Description
TP3320-8	8 oz (237 ml) bottle, fluoresces white , services up to 8 vehicles
TP3340-8	8 oz (237 ml) bottle, fluoresces blue , services up to 8 vehicles
TP-3380-0008	8 oz (237 ml) bottle, fluoresces yellow , services up to 8 vehicles

See price list for all available dye sizes.



RECOMMENDED DYE DOSAGE:

FLUID APPLICATIONS

Engine Oil (includes Synthetics)	
Gasoline	1 oz (30 ml) per 8-12 qt (8-12 L)
Diesel	1 oz (30 ml) per 8 qt (8 L)
Power Steering	1 oz (30 ml) per 8 qt (8 L)
Automatic Transmission	1 oz (30 ml) per 12 qt (12 L)
Fuel (Gasoline + Diesel)	1 oz (30 ml) per 12-18 gal (45-68 L)
Hydraulics (Synthetic- or Petroleum-Based)	
Light-to-Medium Colored	1 oz (30 ml) per 8 gal (30 L)
Very Dark or Intensely Blue	1 oz (30 ml) per 4 gal (15 L)

VIOLET LED FLASHLIGHTS | OPTI-PRO™ UV MAX R & UV MAX



OPTI-PRO™ UV MAX R TPOPUVMR

The new OPTI-PRO™ UV MAX series offers the highest-quality leak detection lamps on the market.

With a more powerful beam profile, technicians can spot multiple leaks in A/C, coolant, and oil-based fluid systems.

LAMP SPECIFICATIONS

Run Time	5+ hours <i>(depending on power mode and usage)</i>
Charge Time	5 hours



**35 ft (10.5 m)
RANGE**



**USB RECHARGEABLE
LI-ION BATTERY**



**POWERFUL
BEAM**



**ADJUSTABLE
FOCUS LENS**



**HIGH/LOW
LIGHT**



**STROBE
LIGHT**



OPTI-PRO™ UV MAX TPOPUVM

The TPOPUVM comes with all of the same great features as the TPOPUVMR – but it is instead powered by three AA batteries. Be confident all leak sites are found with this high-performance lamp.

The strobe light feature helps technicians contrast dye fluorescence from the surrounding area more easily. When there are multiple leaks present, this feature helps technicians pinpoint all leaks.

LAMP SPECIFICATIONS

Run Time	5+ hours <i>(depending on power mode and usage)</i>
-----------------	--



**30 ft (9 m)
RANGE**



**3 AA BATTERIES
INCLUDED**



**POWERFUL
BEAM**



**ADJUSTABLE
FOCUS LENS**



**HIGH/LOW
LIGHT**



**STROBE
LIGHT**




SCAN TO
LEARN MORE



SPOT POWER BEAM PROFILE
POWERFUL COVERAGE

MAX POWER

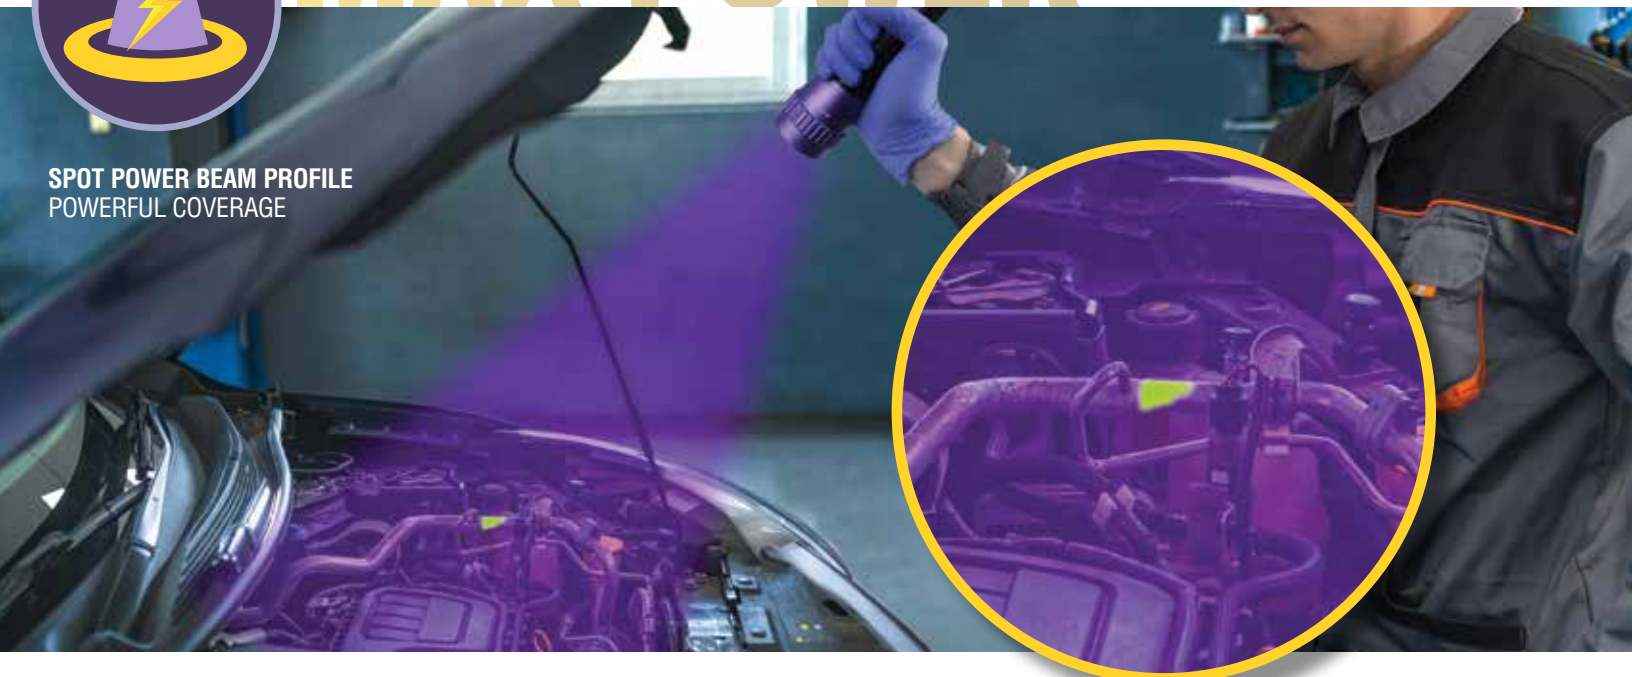

VIOLET LED FLASHLIGHTS | OPTI-PRO™ UV PLUS & UV



STROBE LIGHT:



The strobe feature helps technicians contrast the fluorescent effect even more! Makes leaks easier to spot throughout the entire system.



ADJUSTABLE FOCUS LENS:



2 in 1: Narrow focus for a powerful beam of light to fluoresce the smallest leaks. Wide focus for larger scans and to reduce reflections.



OPTI-PRO™ UV PLUS TPOUV

LAMP SPECIFICATIONS

Run Time 5+ hours
(depending on power mode and usage)

Charge Time 5 hours



**25 ft (7.5 m)
RANGE**



**USB RECHARGEABLE
LI-ION BATTERY**



**ADJUSTABLE
FOCUS LENS**



**HIGH/LOW
LIGHT**



**STROBE
LIGHT**



TP9940 – Fluorescence-enhancing glasses help to reduce glare and enhance leak detection results. Protect your eyes from glare, debris, and fluid.

OPTI-PRO™ UV TPOUV

LAMP SPECIFICATIONS

Run Time 4 hours



**20 ft (6 m)
RANGE**



**3 AAA BATTERIES
INCLUDED**



**ADJUSTABLE
FOCUS LENS**



SCAN TO
LEARN MORE

UV LED FLASHLIGHT



LeakTracker™ MINI UV LED FLASHLIGHT TPLTM



**FLUORESCES
ALL DYES**



**UV
LED**



**25 FT (8 m)
RANGE**

An advanced tool that illuminates all UV dyes, even within the dirtiest diesel engine oil. Its rugged IP68 rating ensures superior water and dust resistance.

LAMP SPECIFICATIONS

Light Source UV LED

Range Up to 25 ft (8 m)

Battery 3 AAA (included)

Run Time 6 hours (continuous)

Glasses UV-absorbing

NOTE: TPLTM replaces TP-8695



**IP68
RATED**



**6 HOUR
RUNTIME**



**3 AAA
BATTERIES
INCLUDED**

**COLOR-CODED
DYES**
**TOTAL SYSTEM
COVERAGE**



In a single service call, a technician can scan all automotive fluid systems easily with the TPLTM ultraviolet leak detection flashlight.

LEAK DETECTION KITS

oem
GRADE

BRIGHTER
DYE
PERFORMANCE

CO-SOLVENT
FREE

UNIVERSAL/ESTER

COMPLETE SERVICE KIT

COMPLETE A/C + FLUID DYE

UV LEAK DETECTION KIT

Compatible with R-1234yf, R-134a, and more

Oil-Based
Fluids

Coolant

TP0PUV57HD

- ▶ **TP0PUV** OPTI-PRO™ UV cordless, violet light LED leak detection flashlight
- ▶ **TP9870 (2)** 0.5 oz (15 ml) cartridges of EZ-Ject™ Universal/Ester multi-dose A/C dye, services up to **14 vehicles each**
- ▶ **TP3400-8** 8 oz (237 ml) bottle of dye for all circulating oil-based fluids, services up to **8 vehicles**
- ▶ **TP-3900-0008** 8 oz (237 ml) bottle of Standard Coolant dye, services up to **8 vehicles**
- ▶ **TP9845** EZ-Ject™ dye injector assembly
- ▶ **TP9847** R-134a hose/coupler & purge fitting
- ▶ **TP19** 2 oz (60 ml) spray bottle of GLO-AWAY™ Plus fluorescent dye cleaner
- ▶ **TP9831** R-1234yf adapter

SERVICES
UP TO
28
A/C
SYSTEMS



UP TO
20 ft (6 m)
Inspection
Range

3x
AAA
Batteries
Included



Fluorescence
Enhancing



GLO-AWAY™
Plus +



Underhood
Labels



R-1234yf
Adapter

**PINPOINT THE
EXACT SOURCE OF
MULTIPLE LEAKS IN
COLOR!**



OIL-BASED FLUID SYSTEMS

FLUID SERVICE KIT

MULTI-COLORED FLUID DYE

UV LEAK DETECTION KIT

Oil-Based
Fluids

Coolant

Color-coded dyes for oil-based fluids: white dye, yellow dye, and blue dye. Green dye for treating coolant leaks.

TPLTM93HD

- ▶ **TPLTM** LeakTracker™ MINI UV LED cordless, leak detection flashlight
- ▶ **TP3320-8** 8 oz (237 ml) bottle of dye for all circulating oil-based fluids, fluoresces **white**, services up to **8 vehicles**
- ▶ **TP3340-8** 8 oz (237 ml) bottle of dye for all circulating oil-based fluids, fluoresces **blue**, services up to **8 vehicles**
- ▶ **TP-3380-0008** 8 oz (237 ml) bottle dye for all circulating oil-based fluids, fluoresces **yellow**, services up to **8 vehicles**
- ▶ **TP-3900-0008** 8 oz (237 ml) bottle of Standard Coolant dye, fluoresces **yellow-green**, services up to **8 vehicles**

NOTE: TPLTM93HD replaces TPUV93HD

SERVICES
UP TO
32
VEHICLE
SYSTEMS



SCAN TO
LEARN MORE



UP TO
25 ft (8 m)
Inspection
Range

3x
AAA
Batteries
Included



UV-absorbing
Glasses



Underhood
Labels

Marksman™ II

ULTRASONIC DIAGNOSTIC TOOL

TP-9367L

SOUND SIGNATURE TECHNOLOGY

Advanced heterodyne circuitry and “**sound signature technology**” to convert and amplify inaudible ultrasonic sounds into audible “**natural**” sounds.

Provides quick diagnosis of leaks and defects before they become major breakdowns!



SCAN TO
LEARN MORE



LASER
POINTER



- ▶ 5-LED signal intensity indicator and audible alarm easily find exact problem source
- ▶ Self-adjusting Automatic Gain Control (AGC) circuitry enhances sensitivity and simplifies operation
- ▶ **Laser pointer** to help pinpoint the source of pressurized leaks
- ▶ Adjustable touch-control sensitivity pad and power switch

- ▶ Internal Noise Control (INC) ensures that tool is unaffected by ambient noise
- ▶ Checks for electrical discharge associated with insulation breakdown, carbon tracking and arcing
- ▶ Unique ultrasonic emitter helps locate faulty seals, gaskets and weather stripping in passenger cabs, trailers and other non-pressurized enclosures

APPLICATIONS:

- ▶ Automotive
- ▶ Heavy-duty trucks
- ▶ Air conditioning
- ▶ Refrigeration

IDEAL FOR DETECTING:

- ▶ Air brake leaks
- ▶ Compressed air leaks
- ▶ Vacuum leaks
- ▶ Tire leaks
- ▶ Gear and bearing wear
- ▶ Electrical discharge
- ▶ Exhaust leaks
- ▶ Refrigerant leaks



FREQUENCY
RESPONSE
36,000 - 44,000 HZ

TRACER PRODUCTS

THE ONLY **DYE** INSTALLED
ON THE **ASSEMBLY LINE.**



OEM

TRACERLINE®

THE **ONLY** UV DYE APPROVED BY OEM'S
FOR USE ON THE ASSEMBLY LINE TO
ENSURE QUALITY




OES &
AFTERMARKET

HIGHEST-QUALITY LEAK DETECTION
AND DIAGNOSTIC TOOLS

TRUSTED

BY MAJOR CAR MANUFACTURERS AND
INSTALLED IN OVER **350 MILLION** VEHICLES

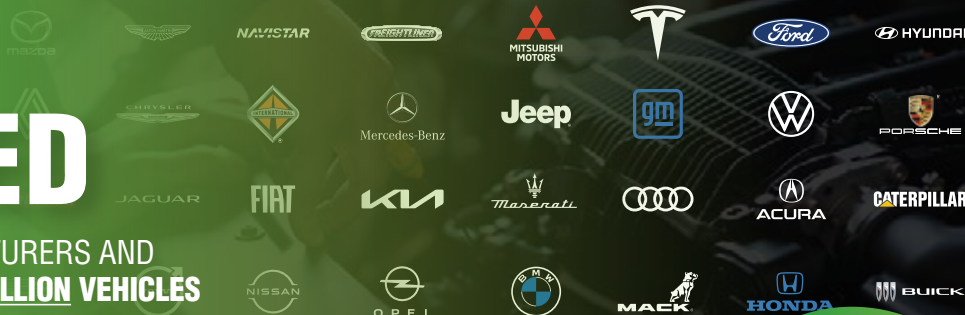

memc.
The Vehicle Suppliers Association

SAE
INTERNATIONAL

MACS

OAC

MADE IN USA



TRACER PRODUCTS
A Division of Spectronics Corporation

265 Spagnoli Rd, #100, Melville, NY 11747

(800) 641.1133 | +1 (516) 333.1254

Orders@TracerProducts.com

CustomerService@TracerProducts.com

www.TracerProducts.com



Scan
to learn more

